



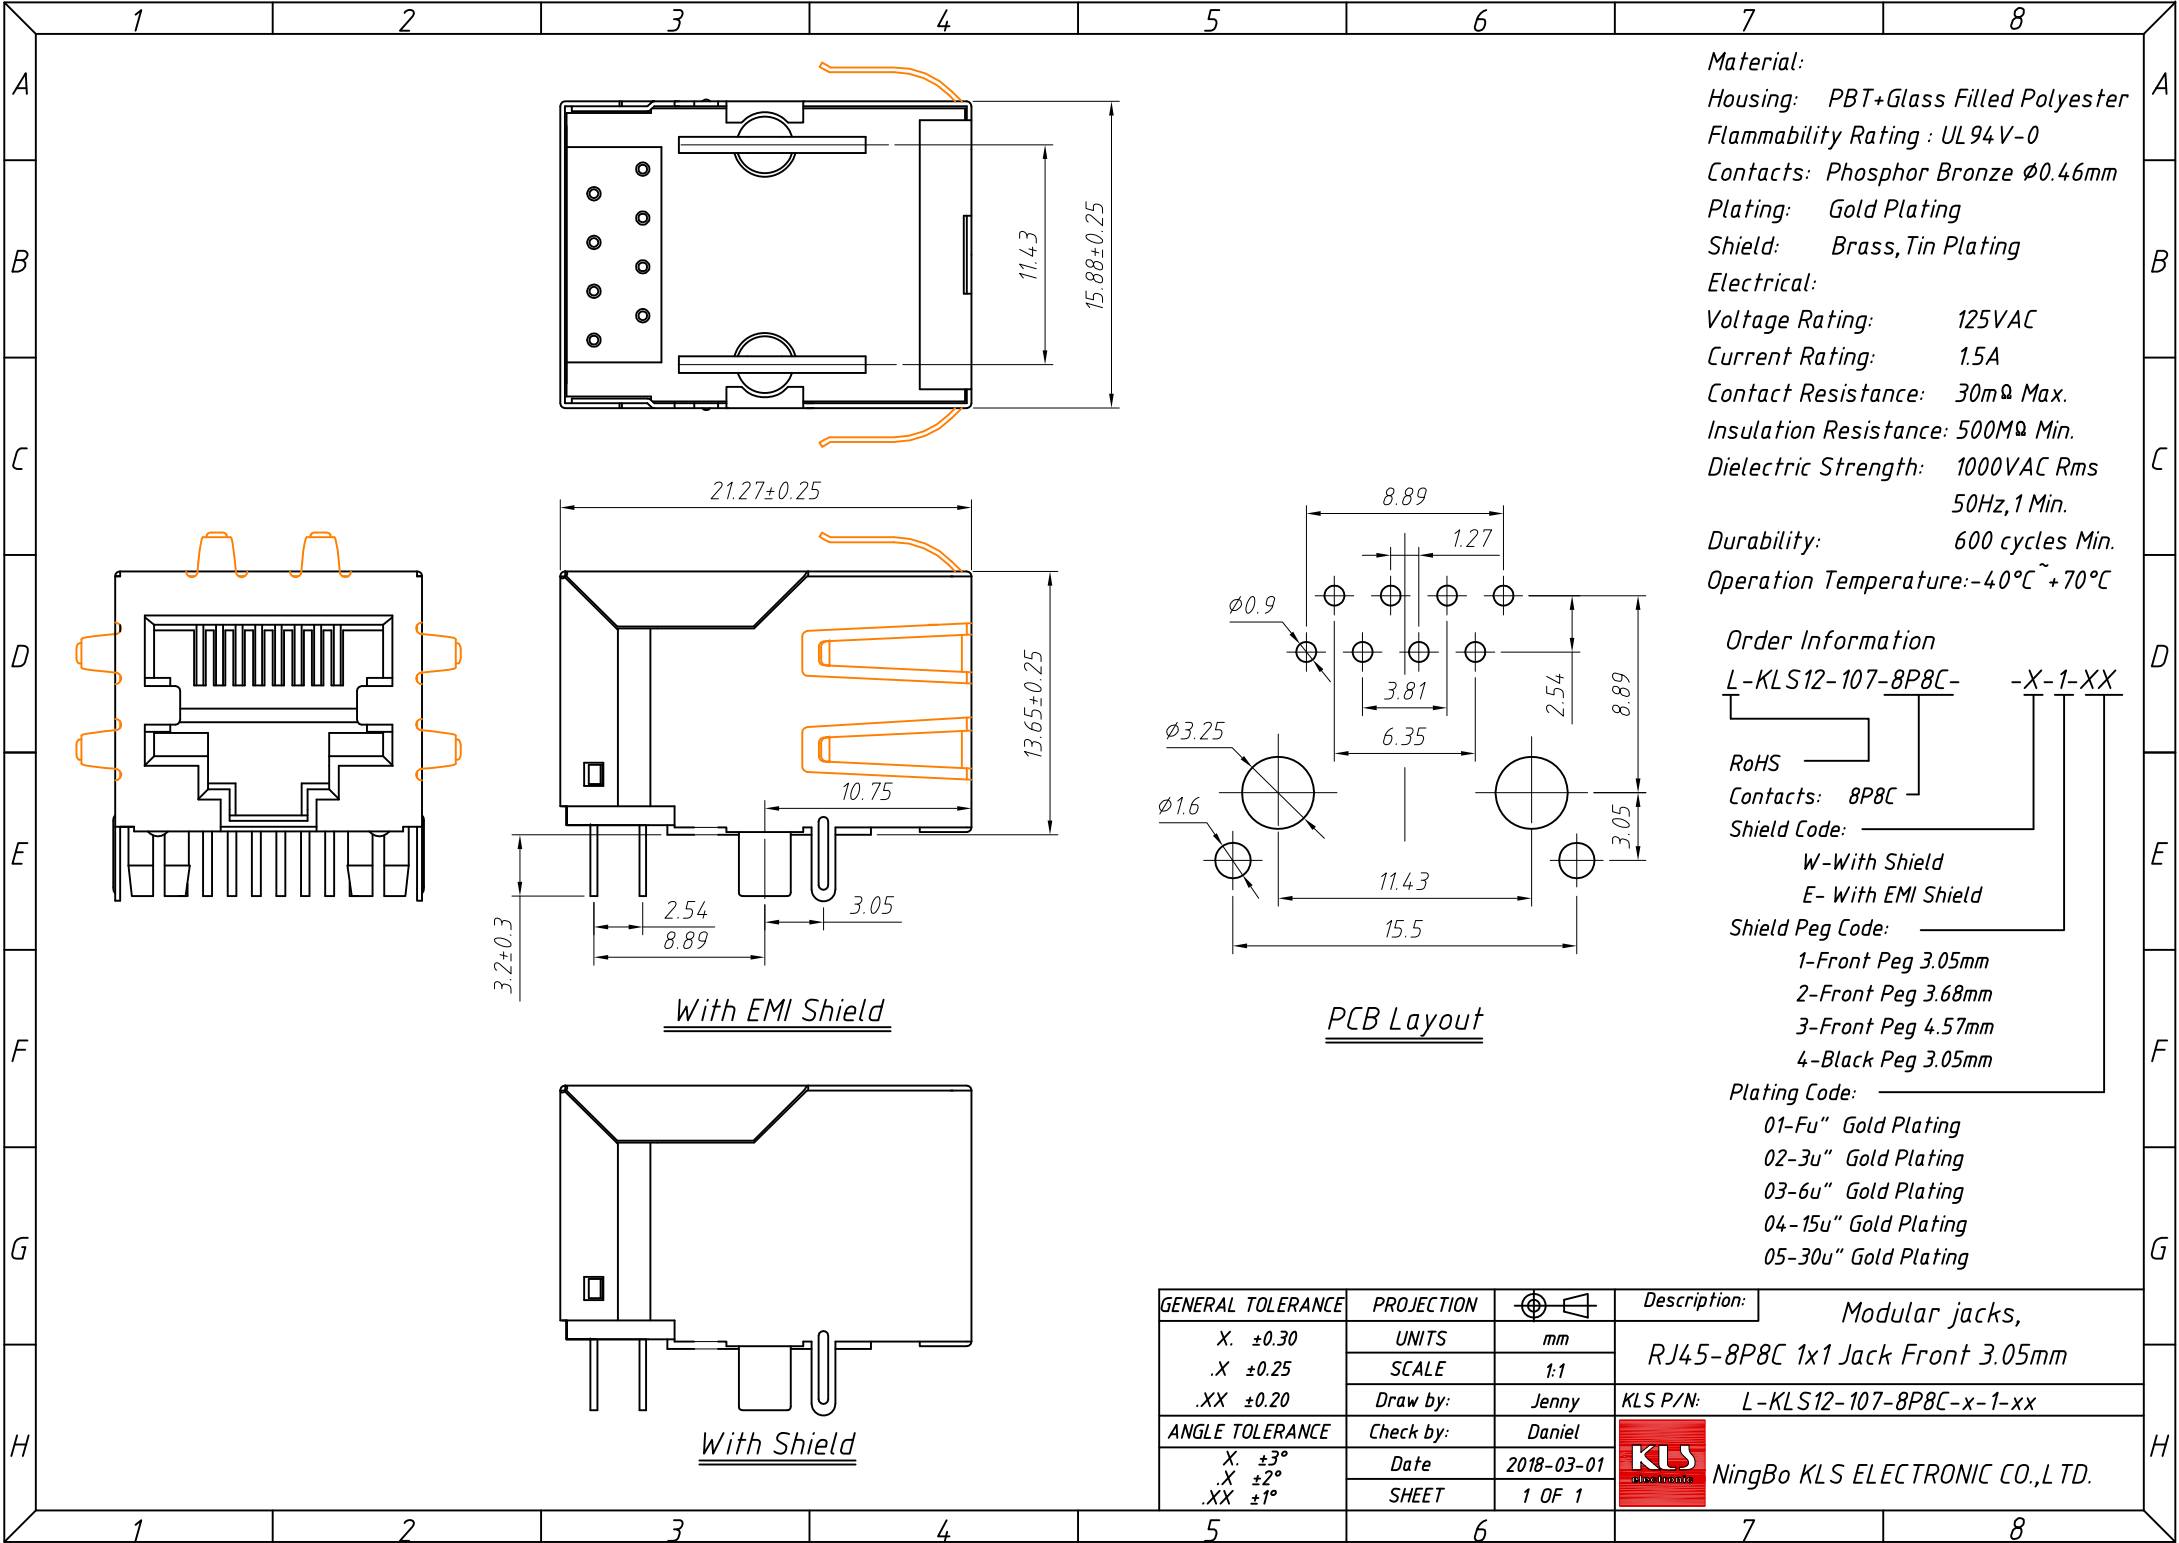

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL 94 V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms
50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ +70°C

Order Information
L-KLS12-107-8P8C- -X-1-XX
RoHS
Contacts: 8P8C
Shield Code:
W-With Shield
E- With EMI Shield
Shield Peg Code:
1-Front Peg 3.05mm
2-Front Peg 3.68mm
3-Front Peg 4.57mm
4-Black Peg 3.05mm
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating


GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.30	UNITS	mm	Modular jacks,
.X ± 0.25	SCALE	1:1	RJ45-8P8C 1x1 Jack Front 3.05mm
.XX ± 0.20	Draw by:	Jenny	KLS P/N: L-KLS12-107-8P8C-x-1-xx
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,LTD.
X. $\pm 3^\circ$	Date	2018-03-01	
.X $\pm 2^\circ$	SHEET	1 OF 1	
.XX $\pm 1^\circ$			

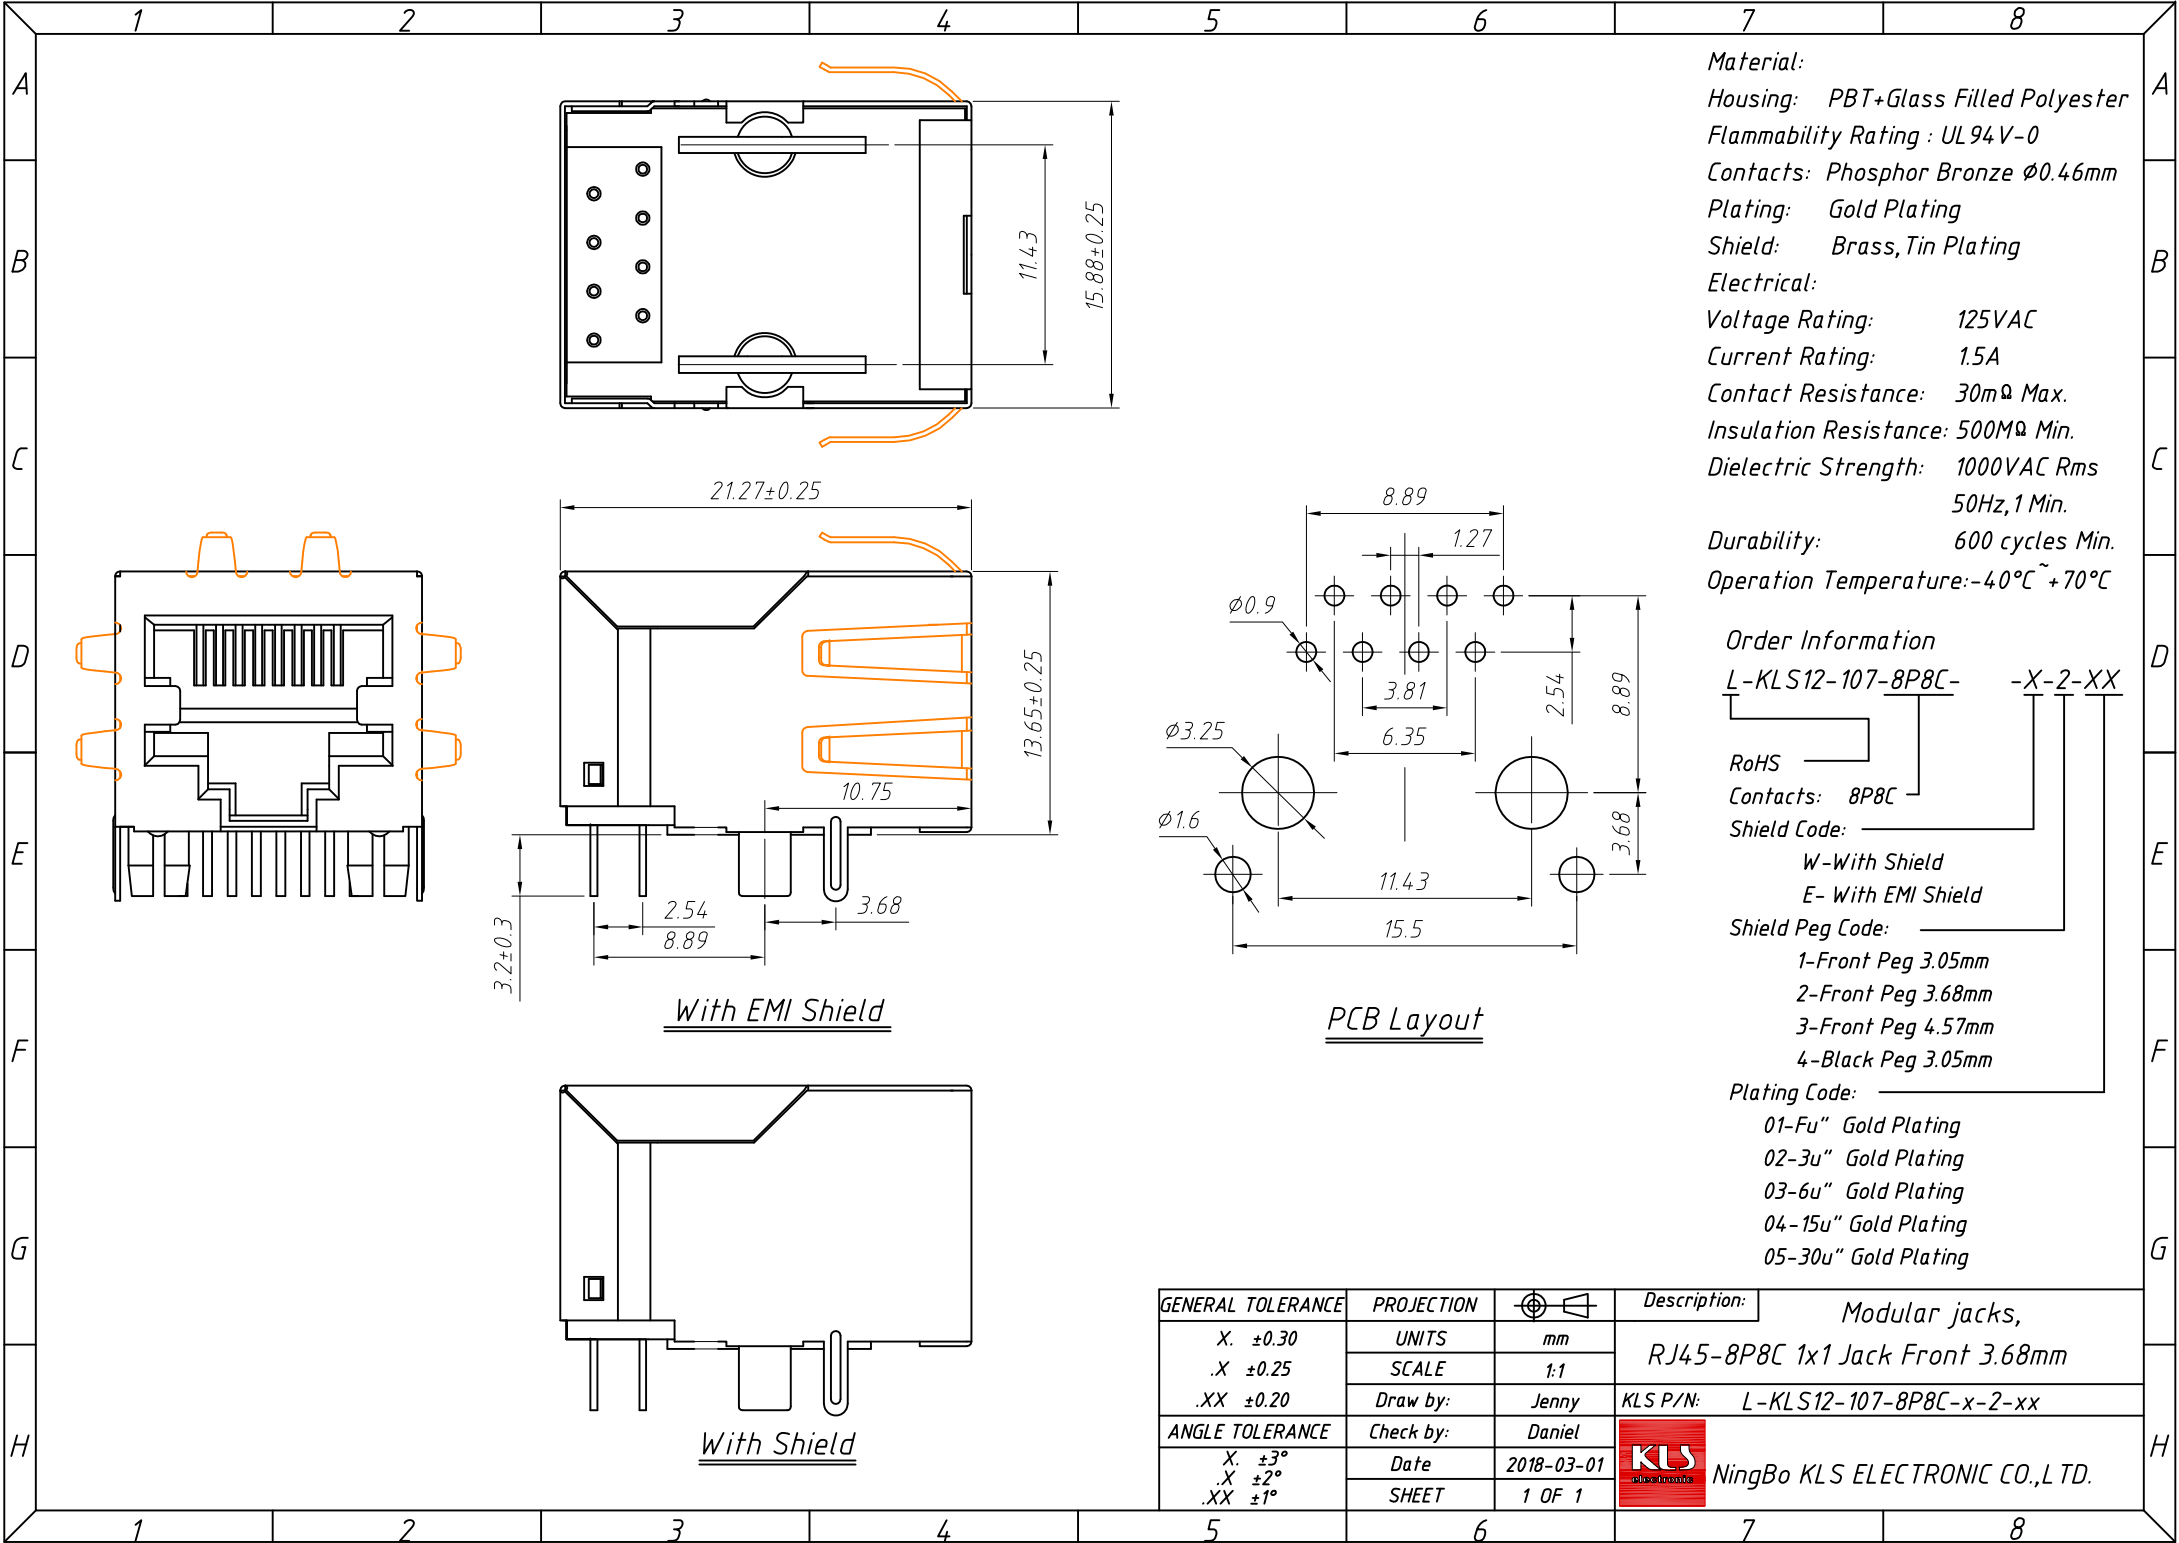


Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL 94 V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms
50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ +70°C

Order Information
L-KLS12-107-8P8C- -X-2-XX
RoHS
Contacts: 8P8C
Shield Code:
W-With Shield
E- With EMI Shield
Shield Peg Code:
1-Front Peg 3.05mm
2-Front Peg 3.68mm
3-Front Peg 4.57mm
4-Black Peg 3.05mm
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.30	UNITS	mm	Modular jacks,
.X ± 0.25	SCALE	1:1	RJ45-8P8C 1x1 Jack Front 3.68mm
.XX ± 0.20	Draw by:	Jenny	KLS P/N: L-KLS12-107-8P8C-x-2-xx
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,LTD.
X. $\pm 3^\circ$	Date	2018-03-01	
.X $\pm 2^\circ$	SHEET	1 OF 1	
.XX $\pm 1^\circ$			

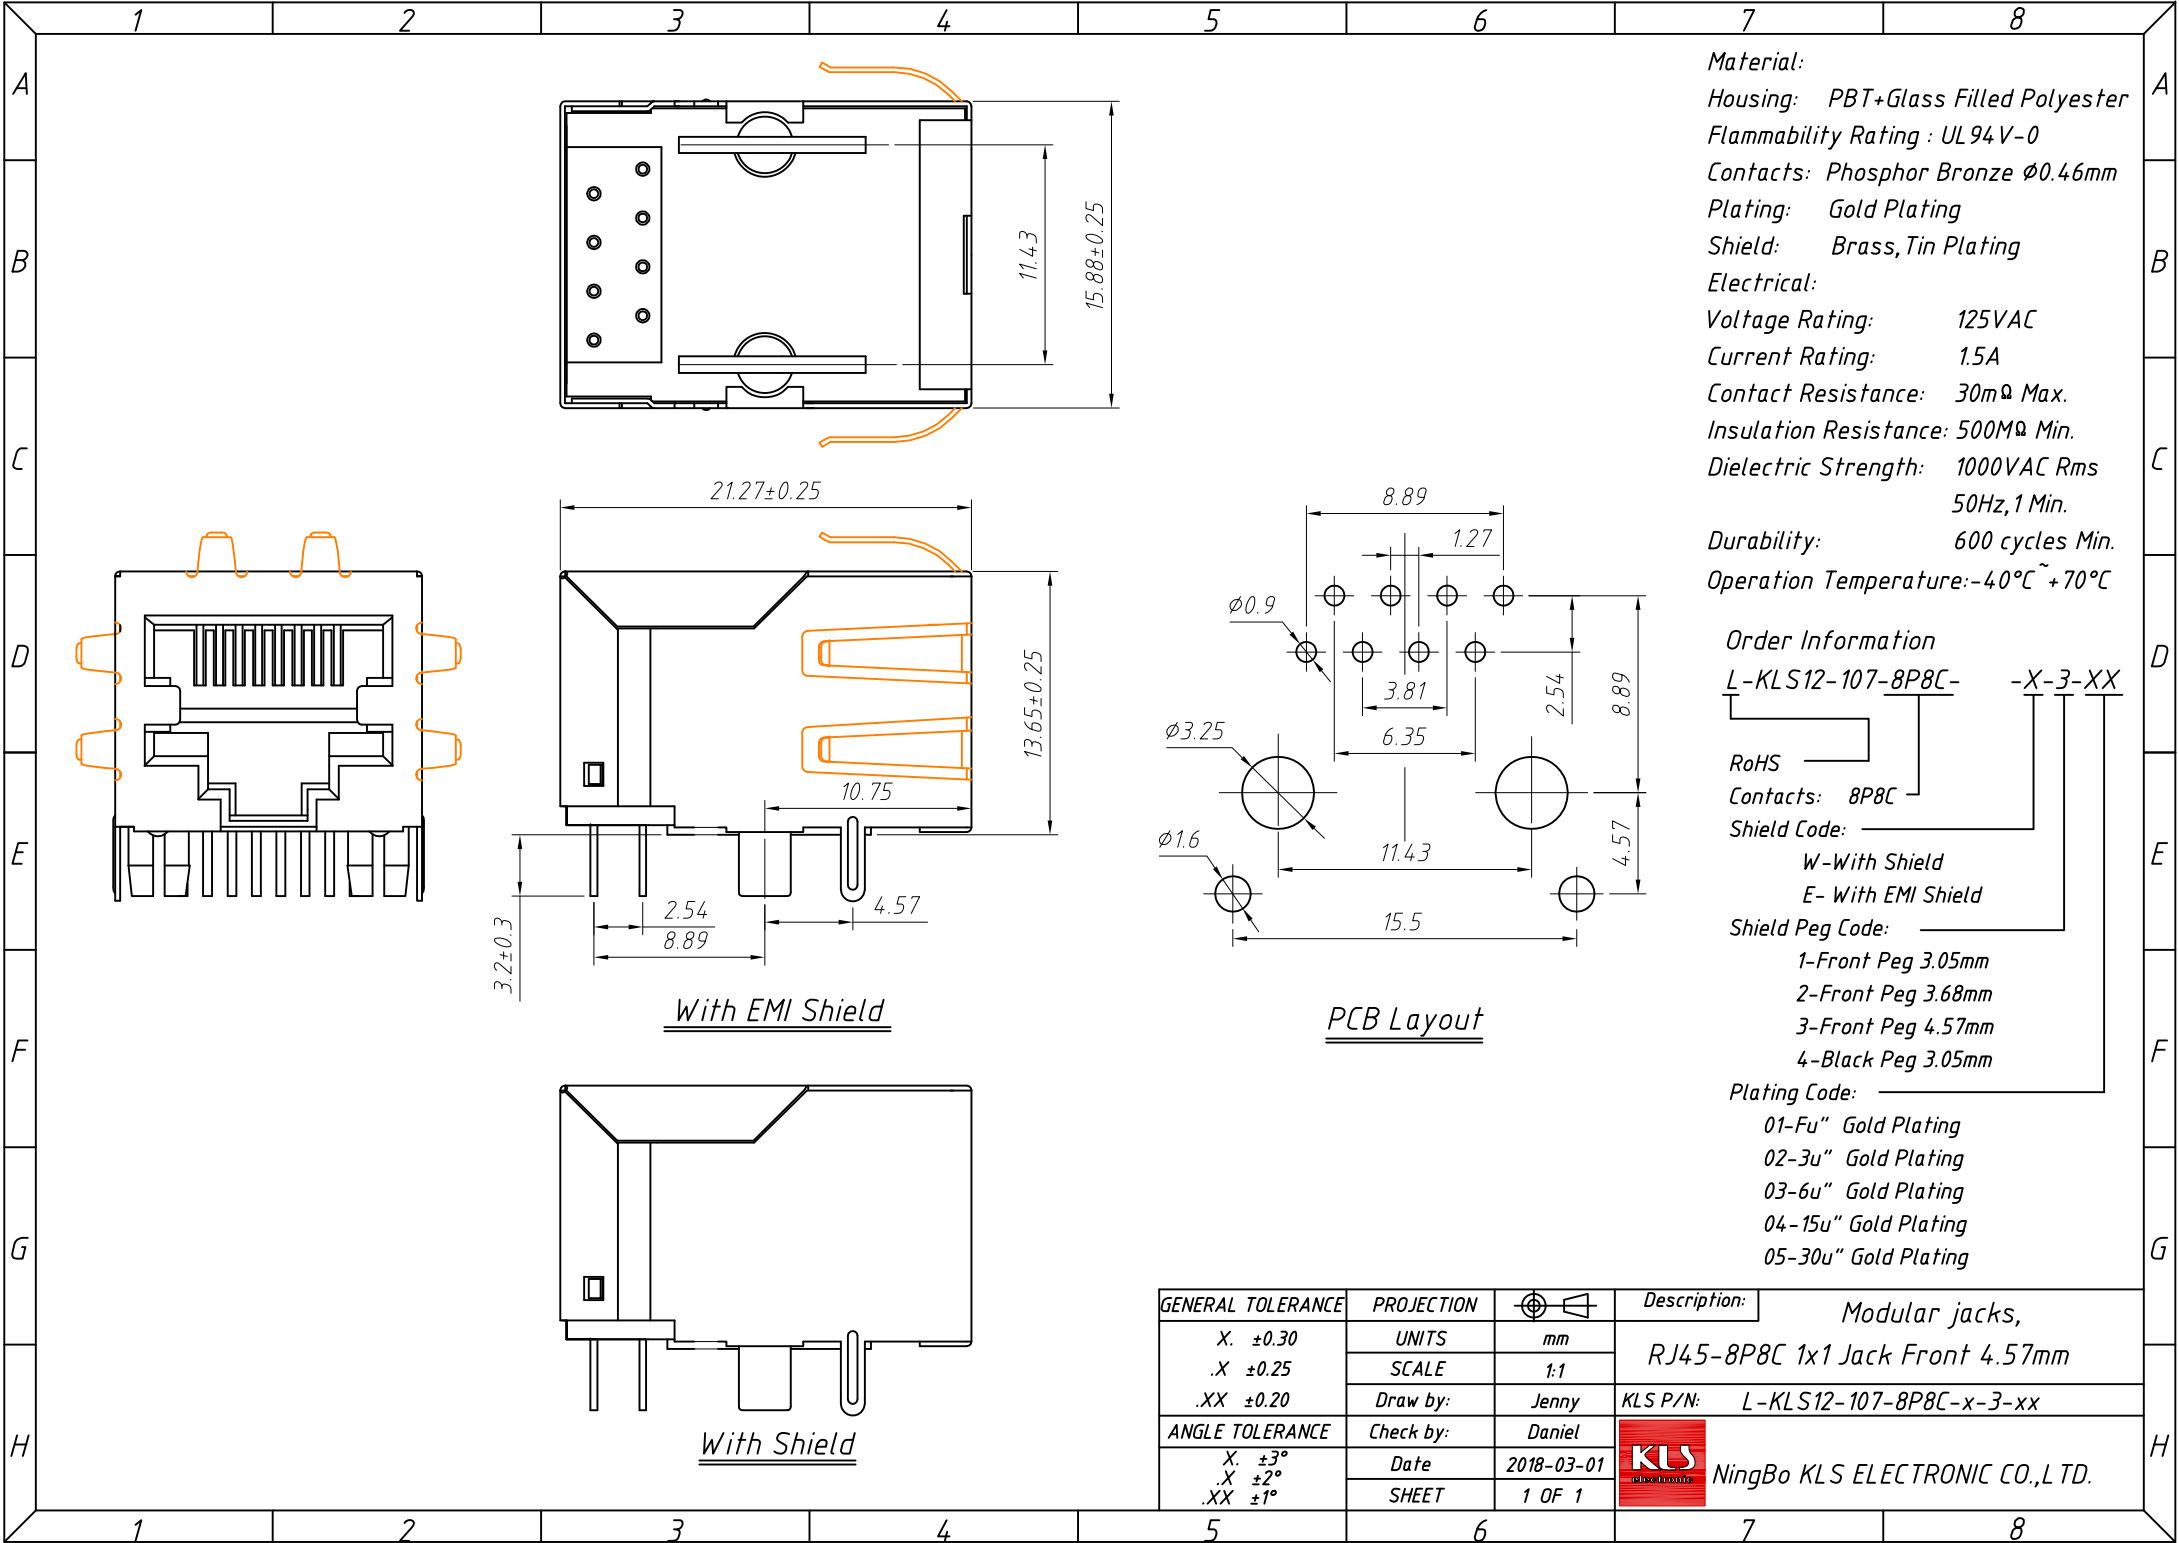

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.30	UNITS	mm	Modular jacks, RJ45-8P8C 1x1 Jack Front 4.57mm
.X ± 0.25	SCALE	1:1	
.XX ± 0.20	Draw by:	Jenny	KLS P/N: L-KLS12-107-8P8C-x-3-xx
ANGLE TOLERANCE	Check by:	Daniel	
X. $\pm 3^\circ$	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,LTD.
.X $\pm 2^\circ$	SHEET	1 OF 1	
.XX $\pm 1^\circ$			

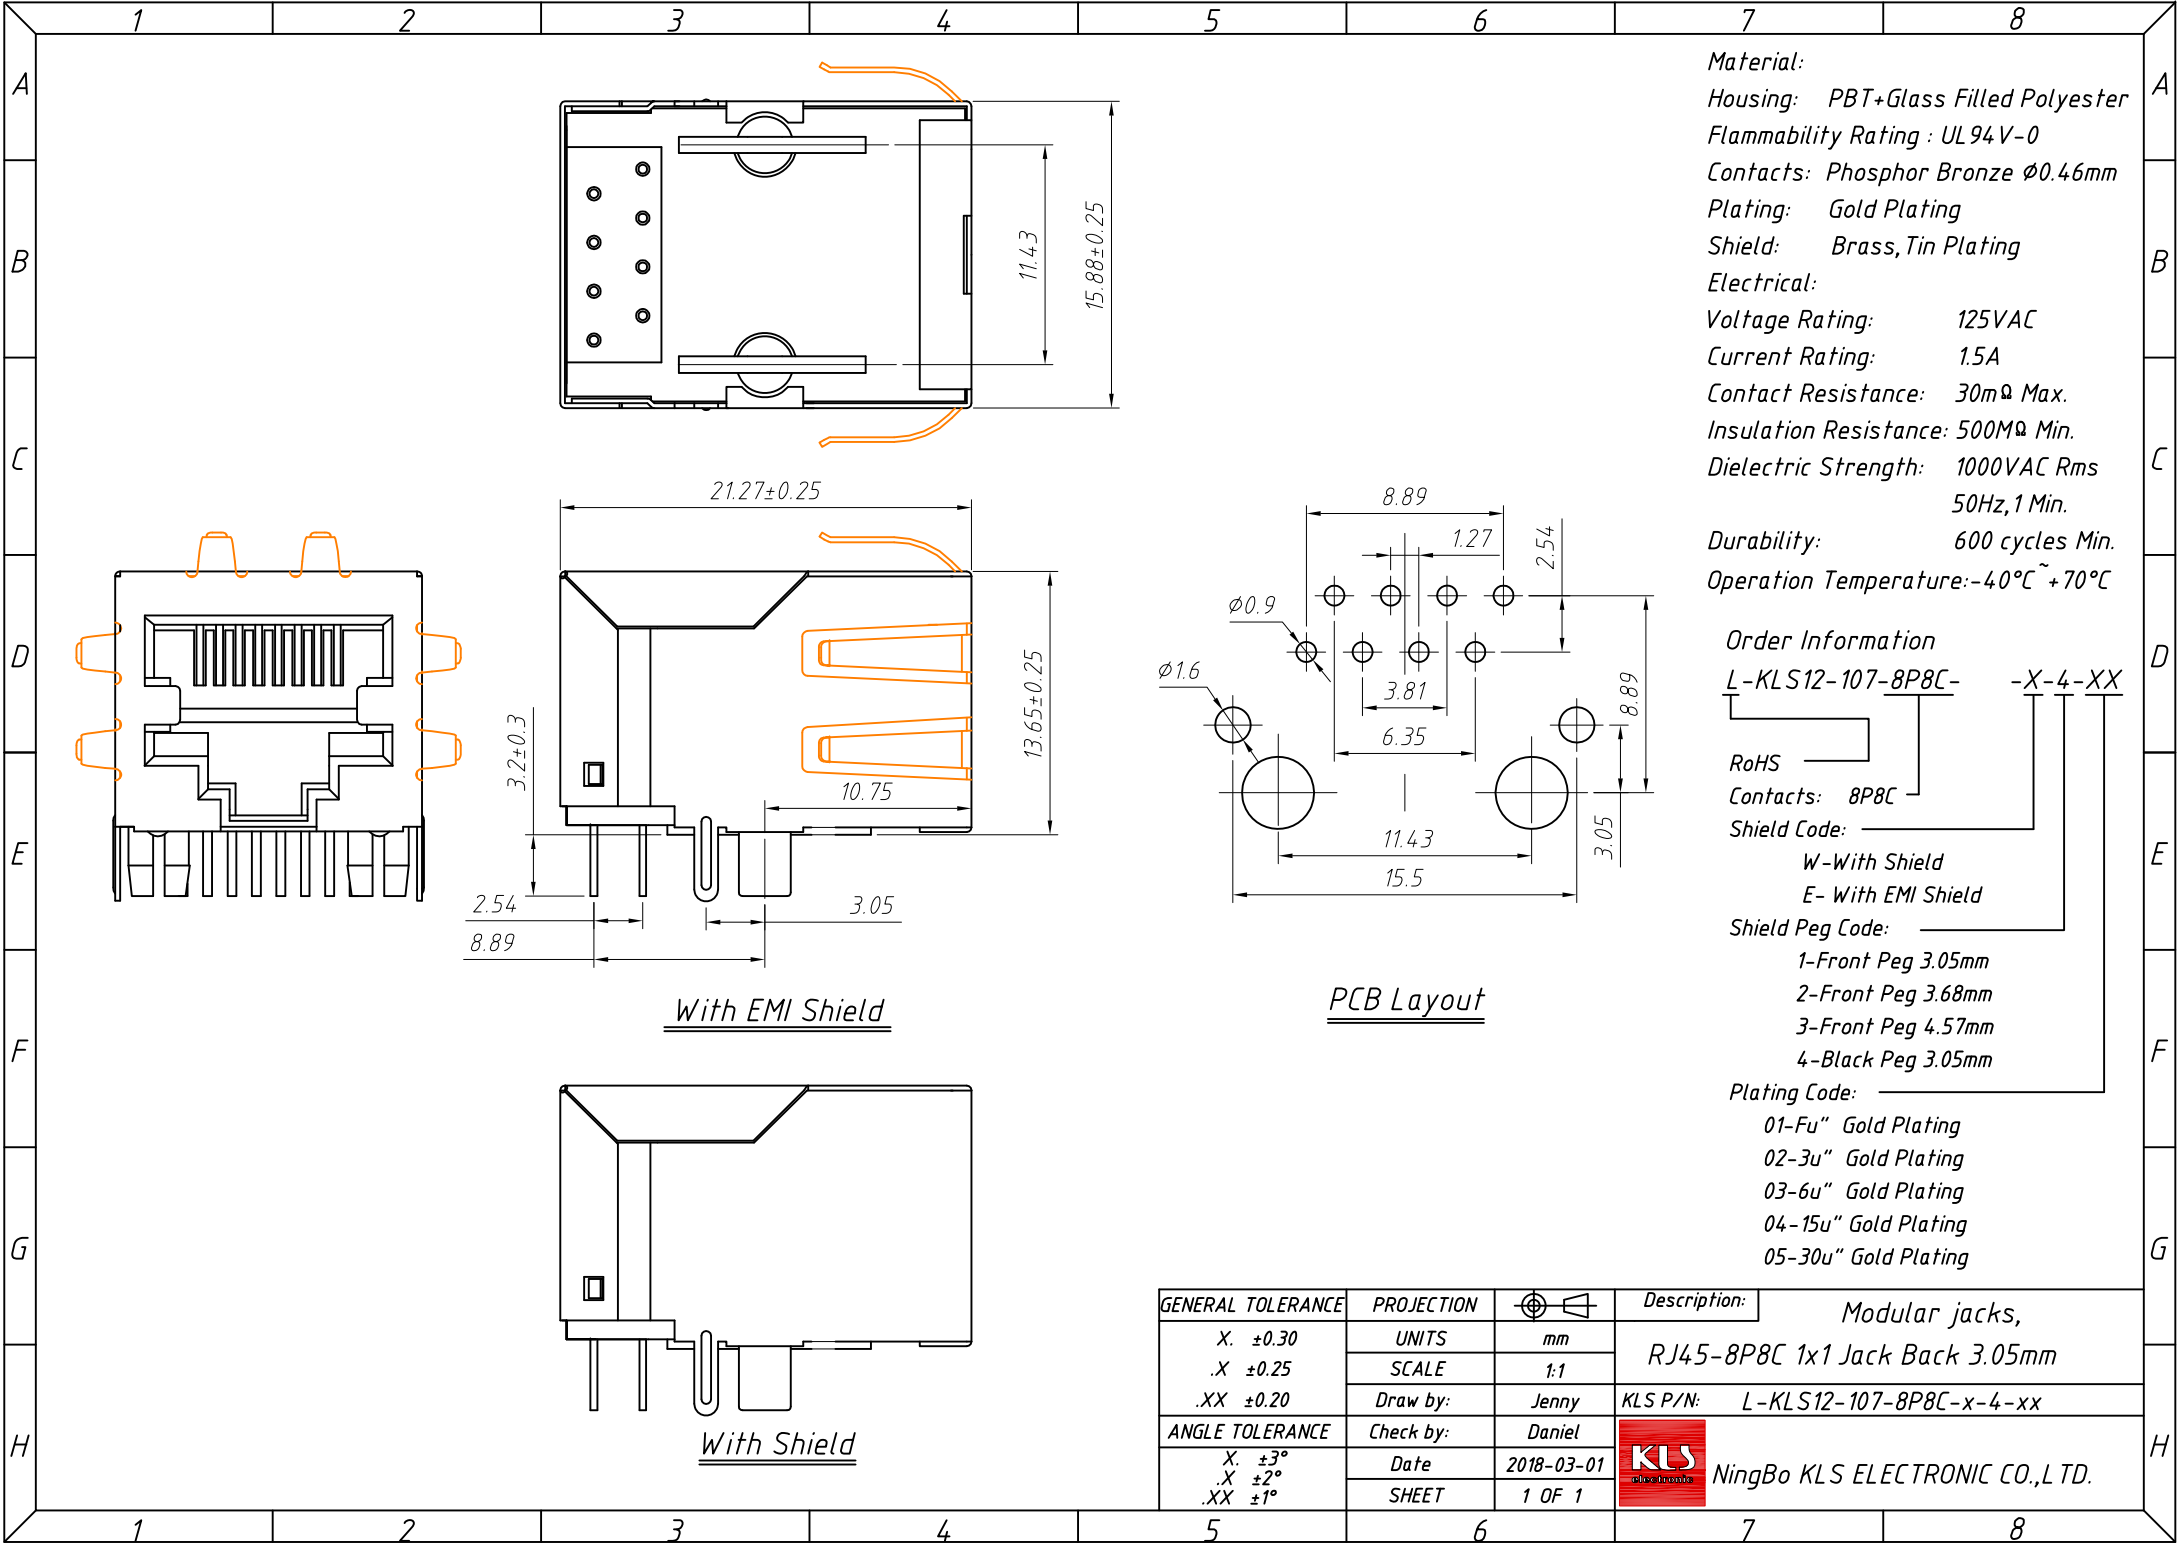

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL 94 V-0
Contacts: Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms
50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ +70°C

Order Information
L-KLS12-107-8P8C- -X-4-XX
RoHS
Contacts: 8P8C
Shield Code:
W-With Shield
E- With EMI Shield
Shield Peg Code:
1-Front Peg 3.05mm
2-Front Peg 3.68mm
3-Front Peg 4.57mm
4-Black Peg 3.05mm
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.30	UNITS	mm	Modular jacks,
.X ± 0.25	SCALE	1:1	RJ45-8P8C 1x1 Jack Back 3.05mm
.XX ± 0.20	Draw by:	Jenny	KLS P/N: L-KLS12-107-8P8C-x-4-xx
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,LTD.
X. $\pm 3^\circ$	Date	2018-03-01	
.X $\pm 2^\circ$	SHEET	1 OF 1	
.XX $\pm 1^\circ$			