

TERMINAL BLOCK Connector

PCB Series

KLS2-103-5.00 Series Pitch=5.00mm/10.00mm

Electrical :



Rated voltage: 300V
 Rated current: 16A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC1500V/1Min
 Wire range: 22-12AWG 2.5mm²

Material

Screws: M2.5 steel Zinc plated
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
 MAX Soldering: 250°C for 5 Sec.
 Torque: 0.4Nm (3.6lb.in)
 Strip length: 6-7mm

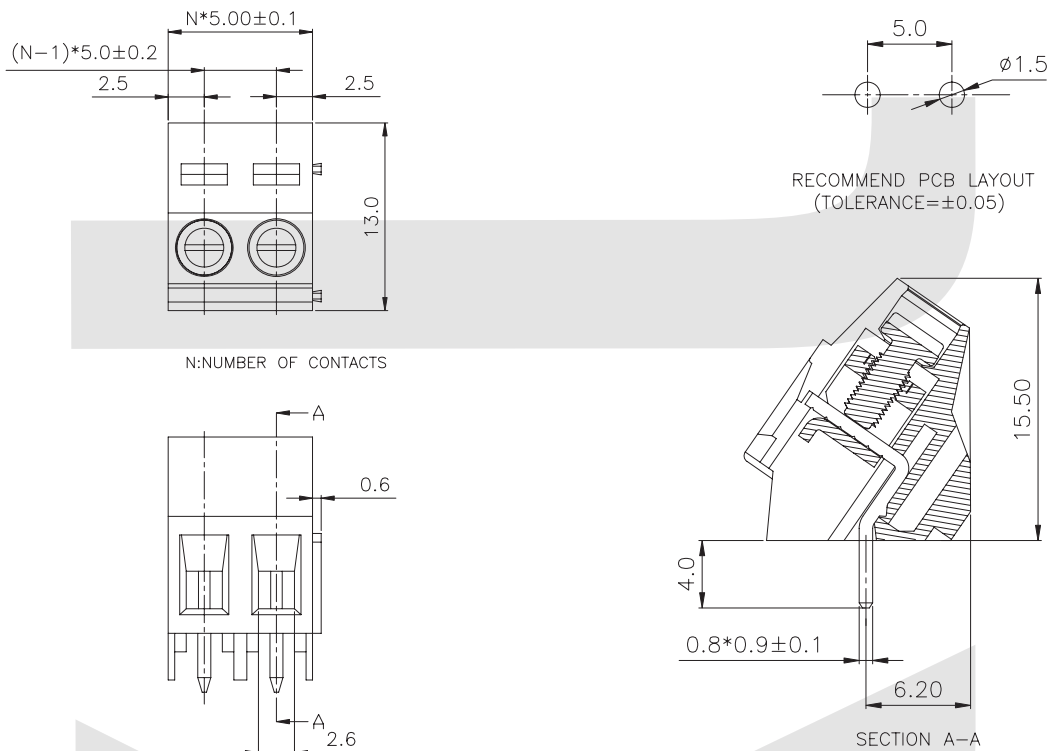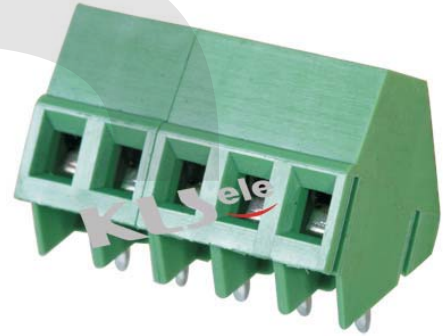

ORDER INFORMATION

Product NO.: KLS2-103-5.00-XXP X X X

Pos. NO.

Series No.

Pitch: 5.00=5.00mm
 10.00=10.00mm

Number of Pole

Customer Request

Screw: C=Cross Screw
 S=Slot Screw

Color: 1=Gray
 4=Green
 7=Transparent

2=Blue
 5=Orange
 8=Yellow

3=Black
 6=Red
 9=White