



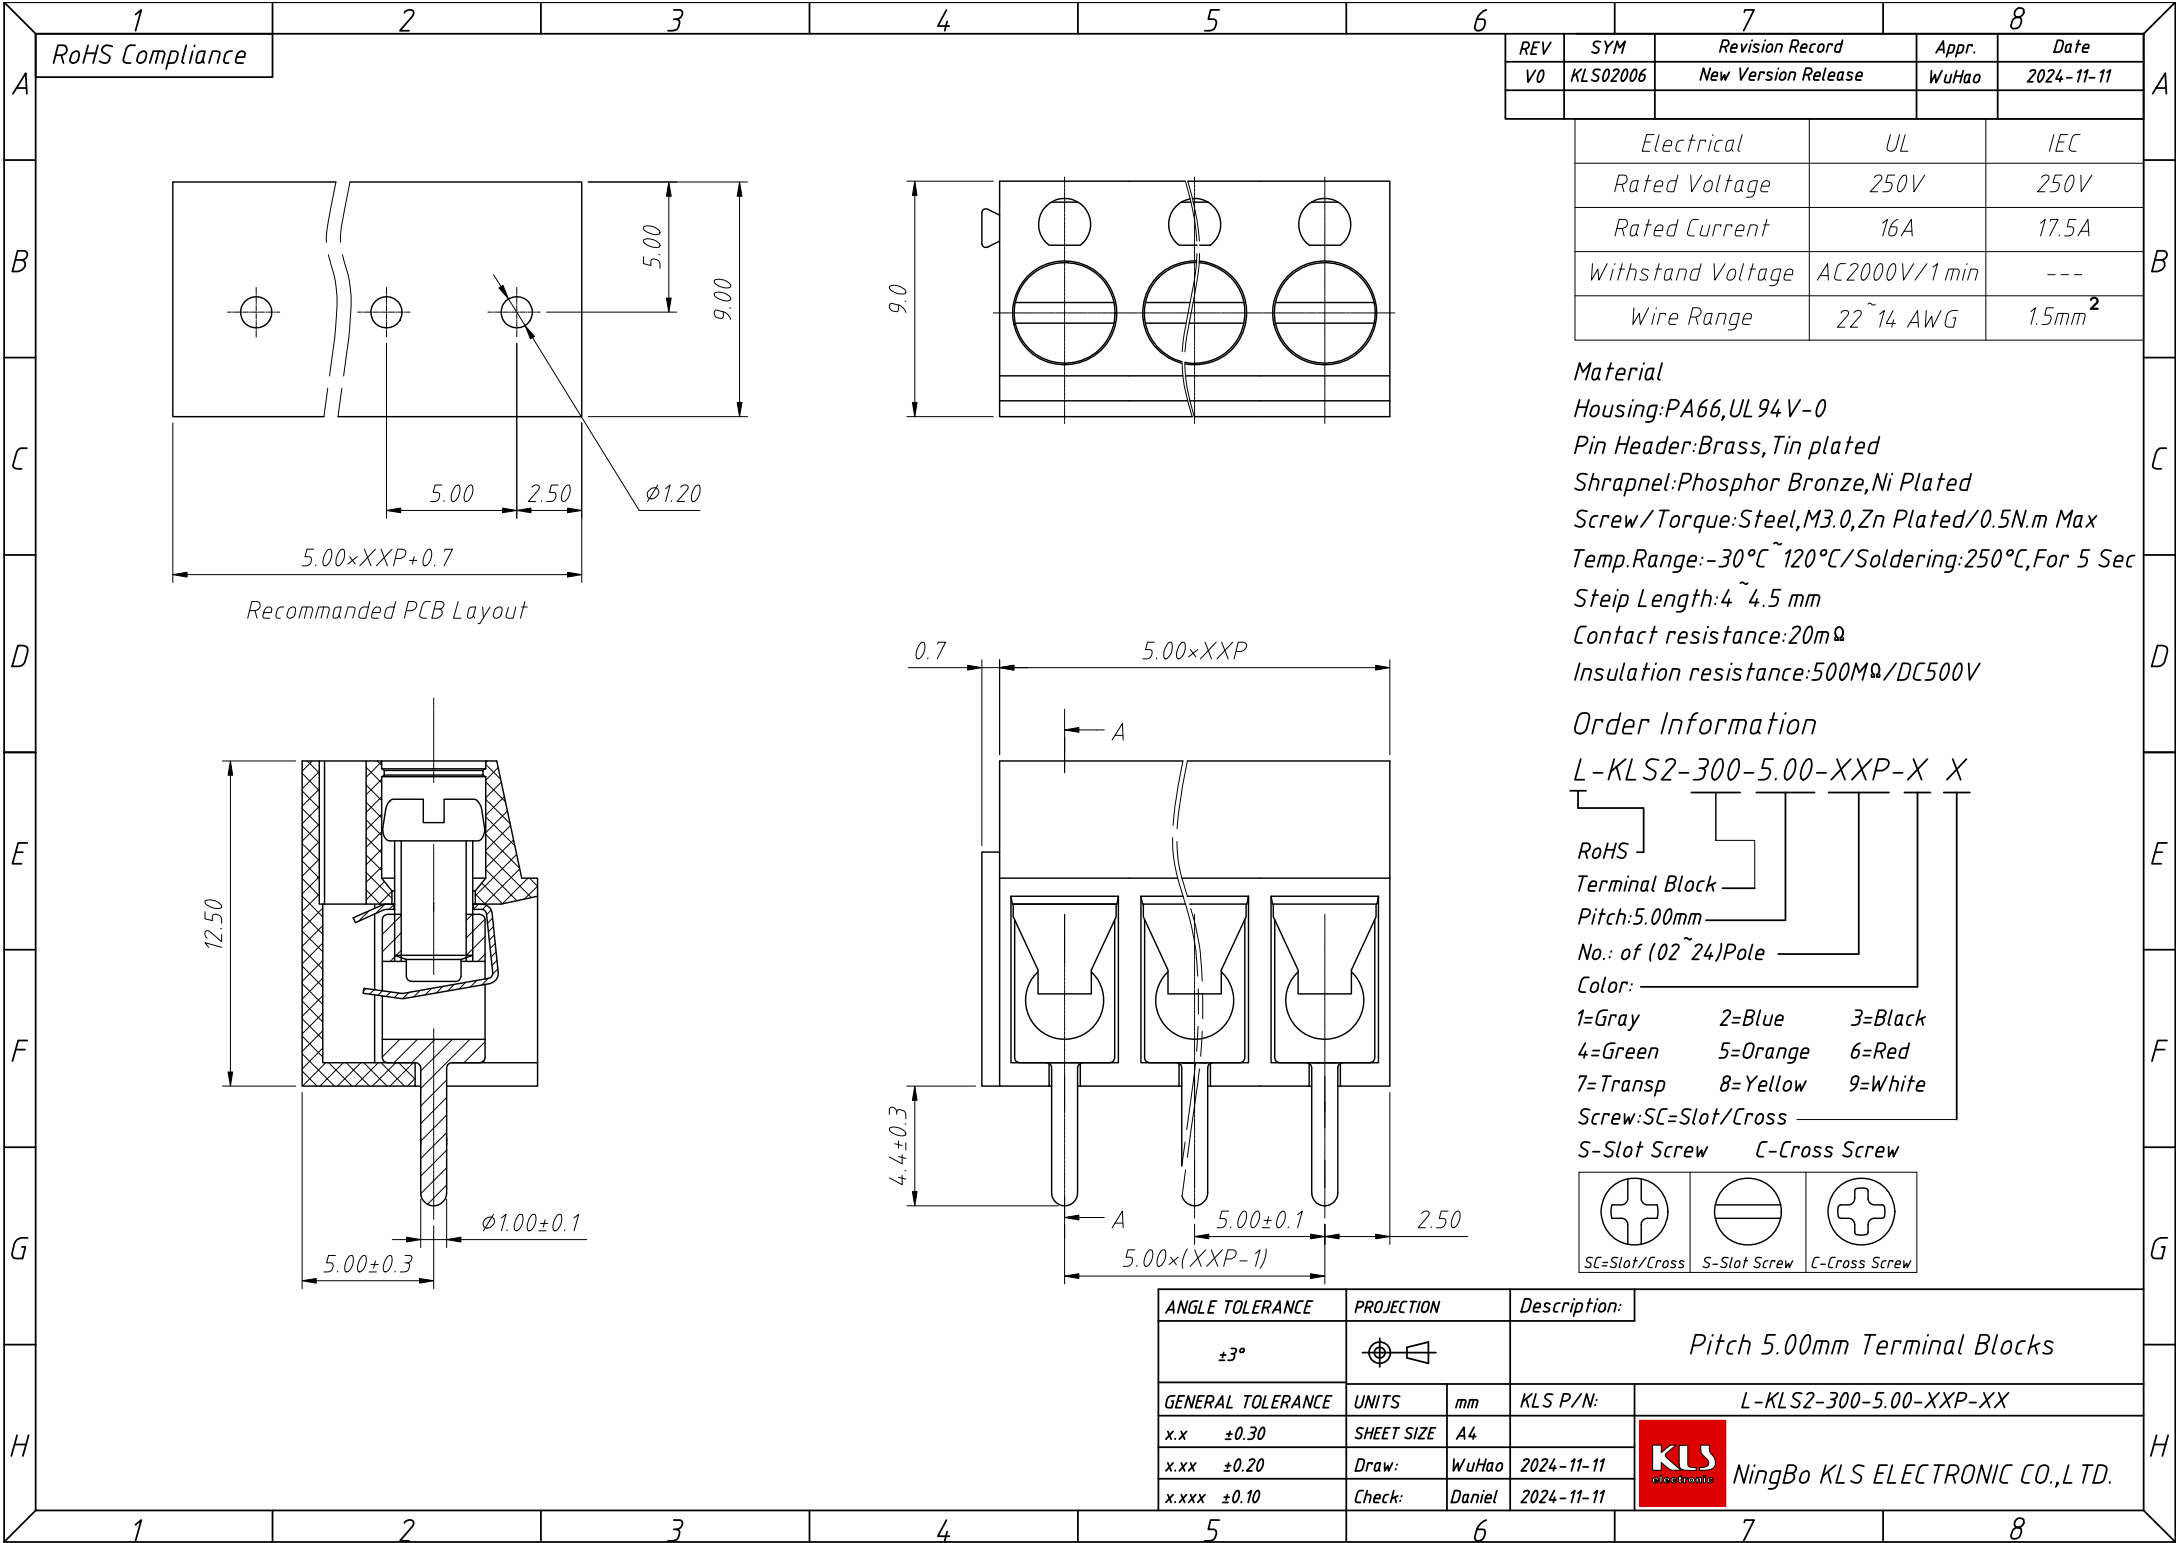

REV		SYM	Revision Record		Appr.	Date
V0		KLS02006	New Version Release		WuHao	2024-11-11
Electrical			UL		IEC	
Rated Voltage			250V		250V	
Rated Current			16A		17.5A	
Withstand Voltage			AC2000V/1 min		---	
Wire Range			22~14 AWG		1.5mm ²	

Material
Housing:PA66,UL 94V-0
Pin Header:Brass,Tin plated
Shrapnel:Phosphor Bronze,Ni Plated
Screw/Torque:Steel,M3.0,Zn Plated/0.5N.m Max
Temp.Range:-30°C~120°C/Soldering:250°C,For 5 Sec
Steip Length:4~4.5 mm
Contact resistance:20mΩ
Insulation resistance:500MΩ/DC500V

Order Information
L-KLS2-300-5.00-XXP-X X
RoHS
Terminal Block
Pitch:5.00mm
No.: of (02~24)Pole
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw



ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Pitch 5.00mm Terminal Blocks	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x ±0.30		SHEET SIZE		A4	
x.xx ±0.20		Draw:		WuHao	2024-11-11
x.xxx ±0.10		Check:		Daniel	2024-11-11