



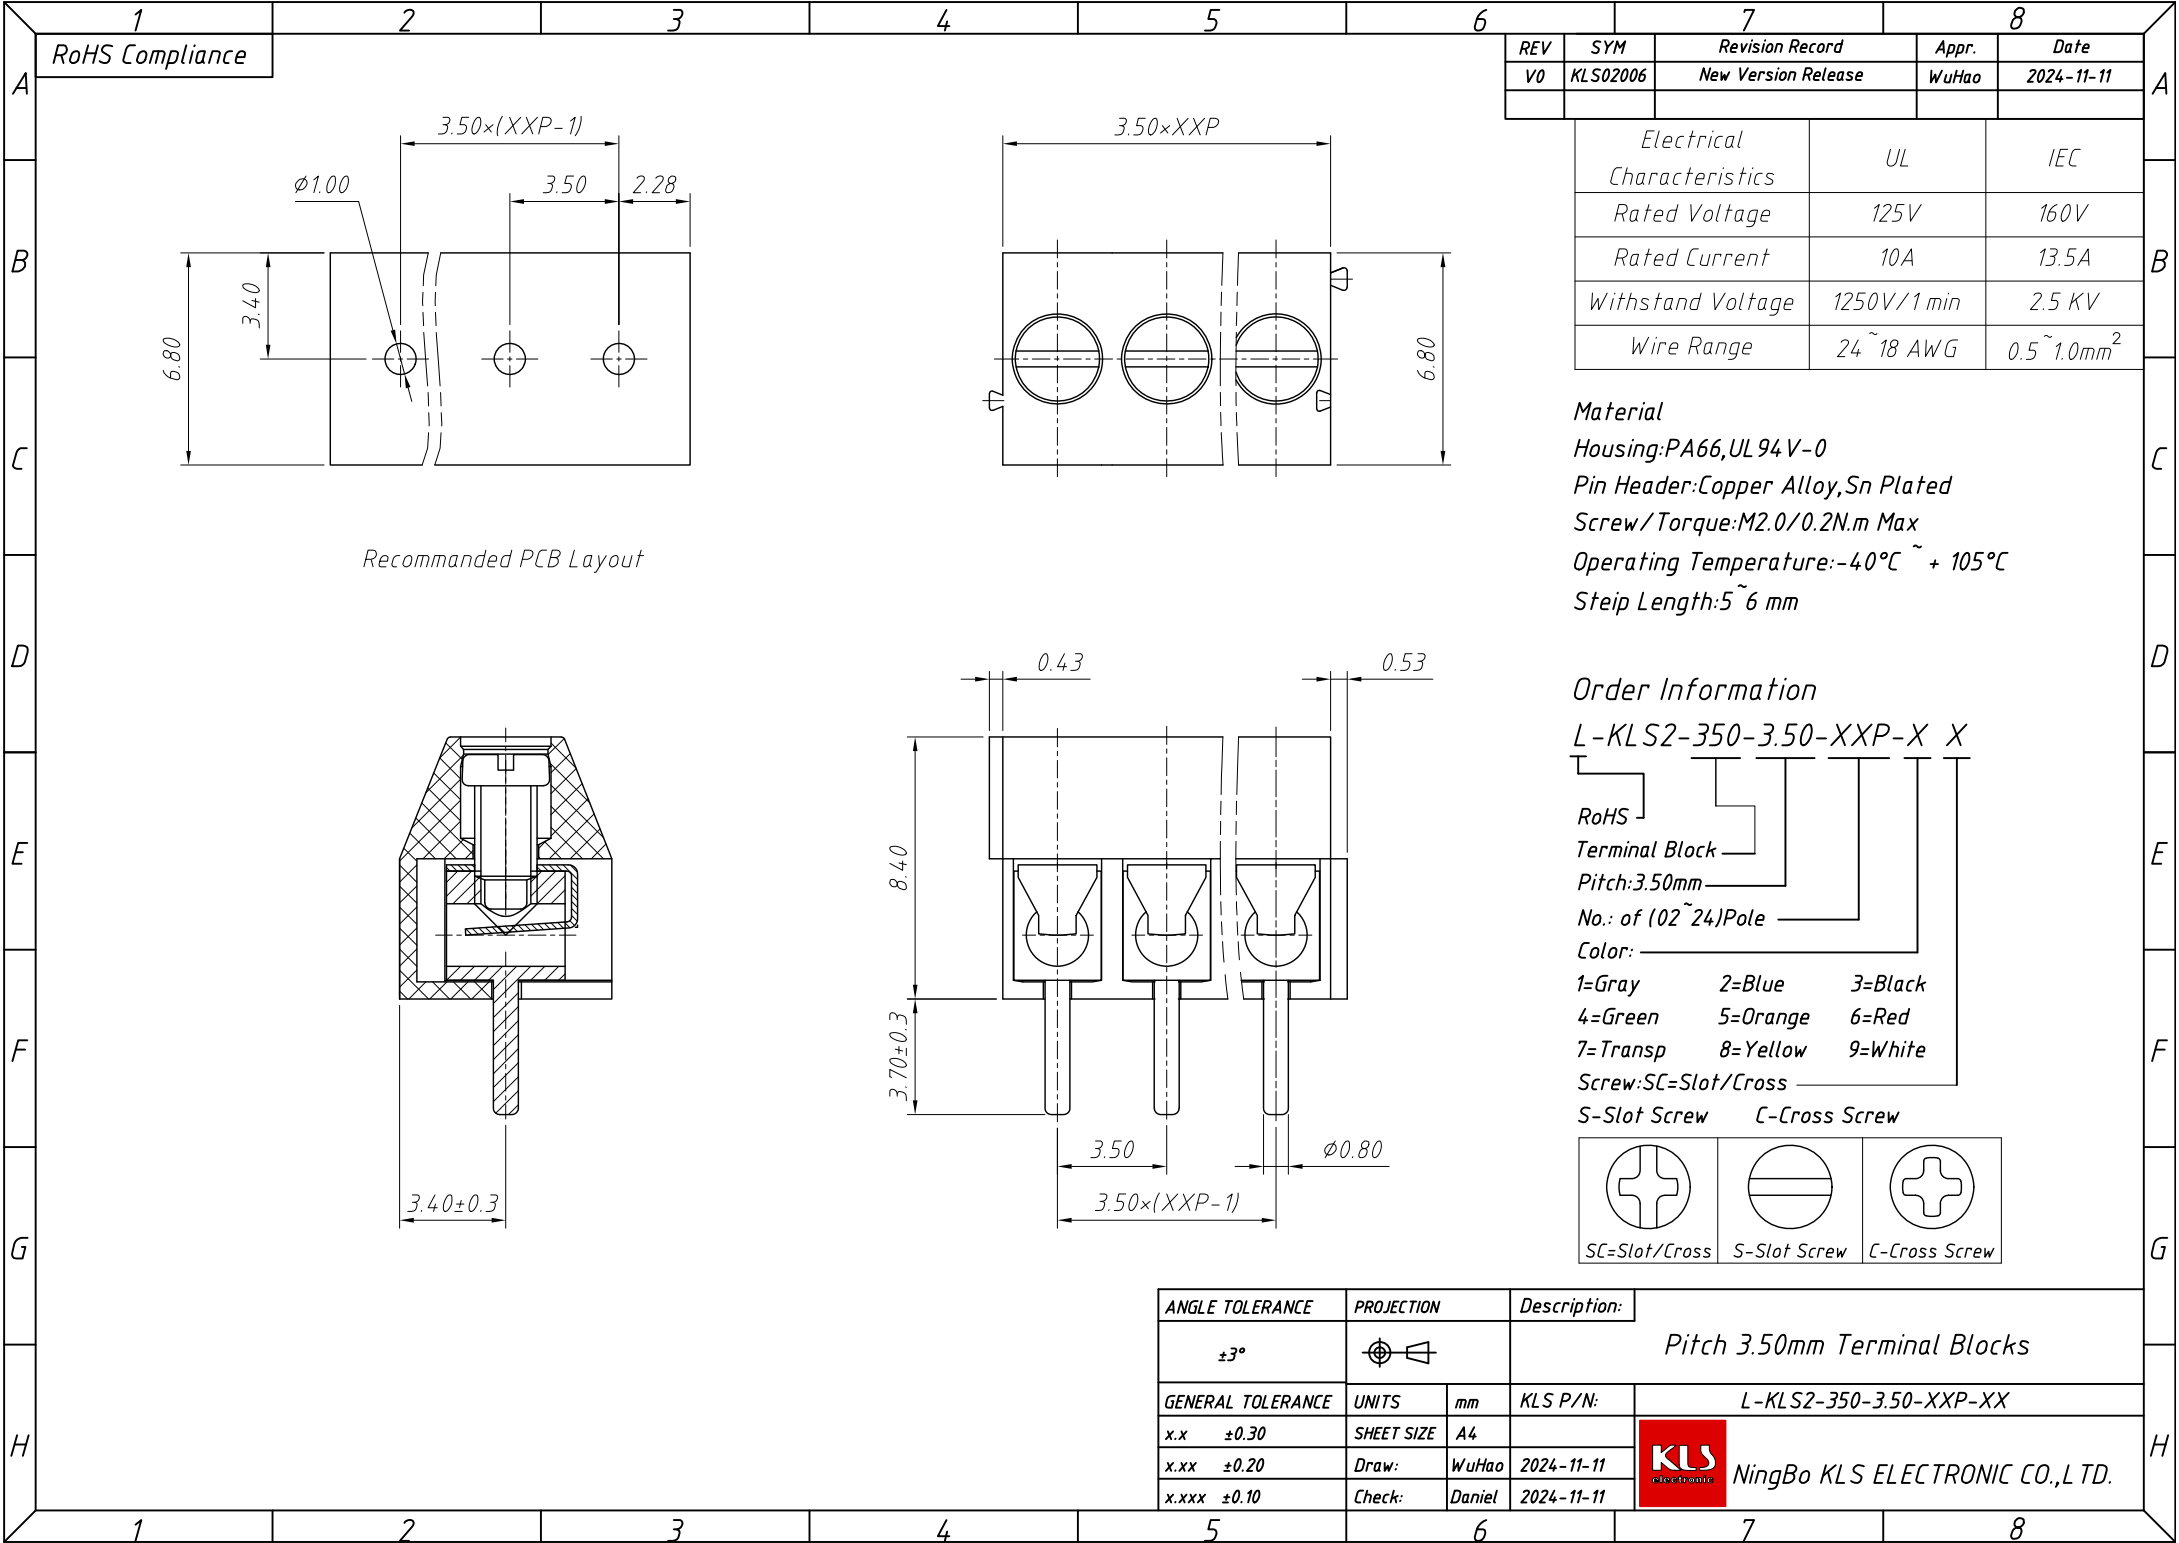

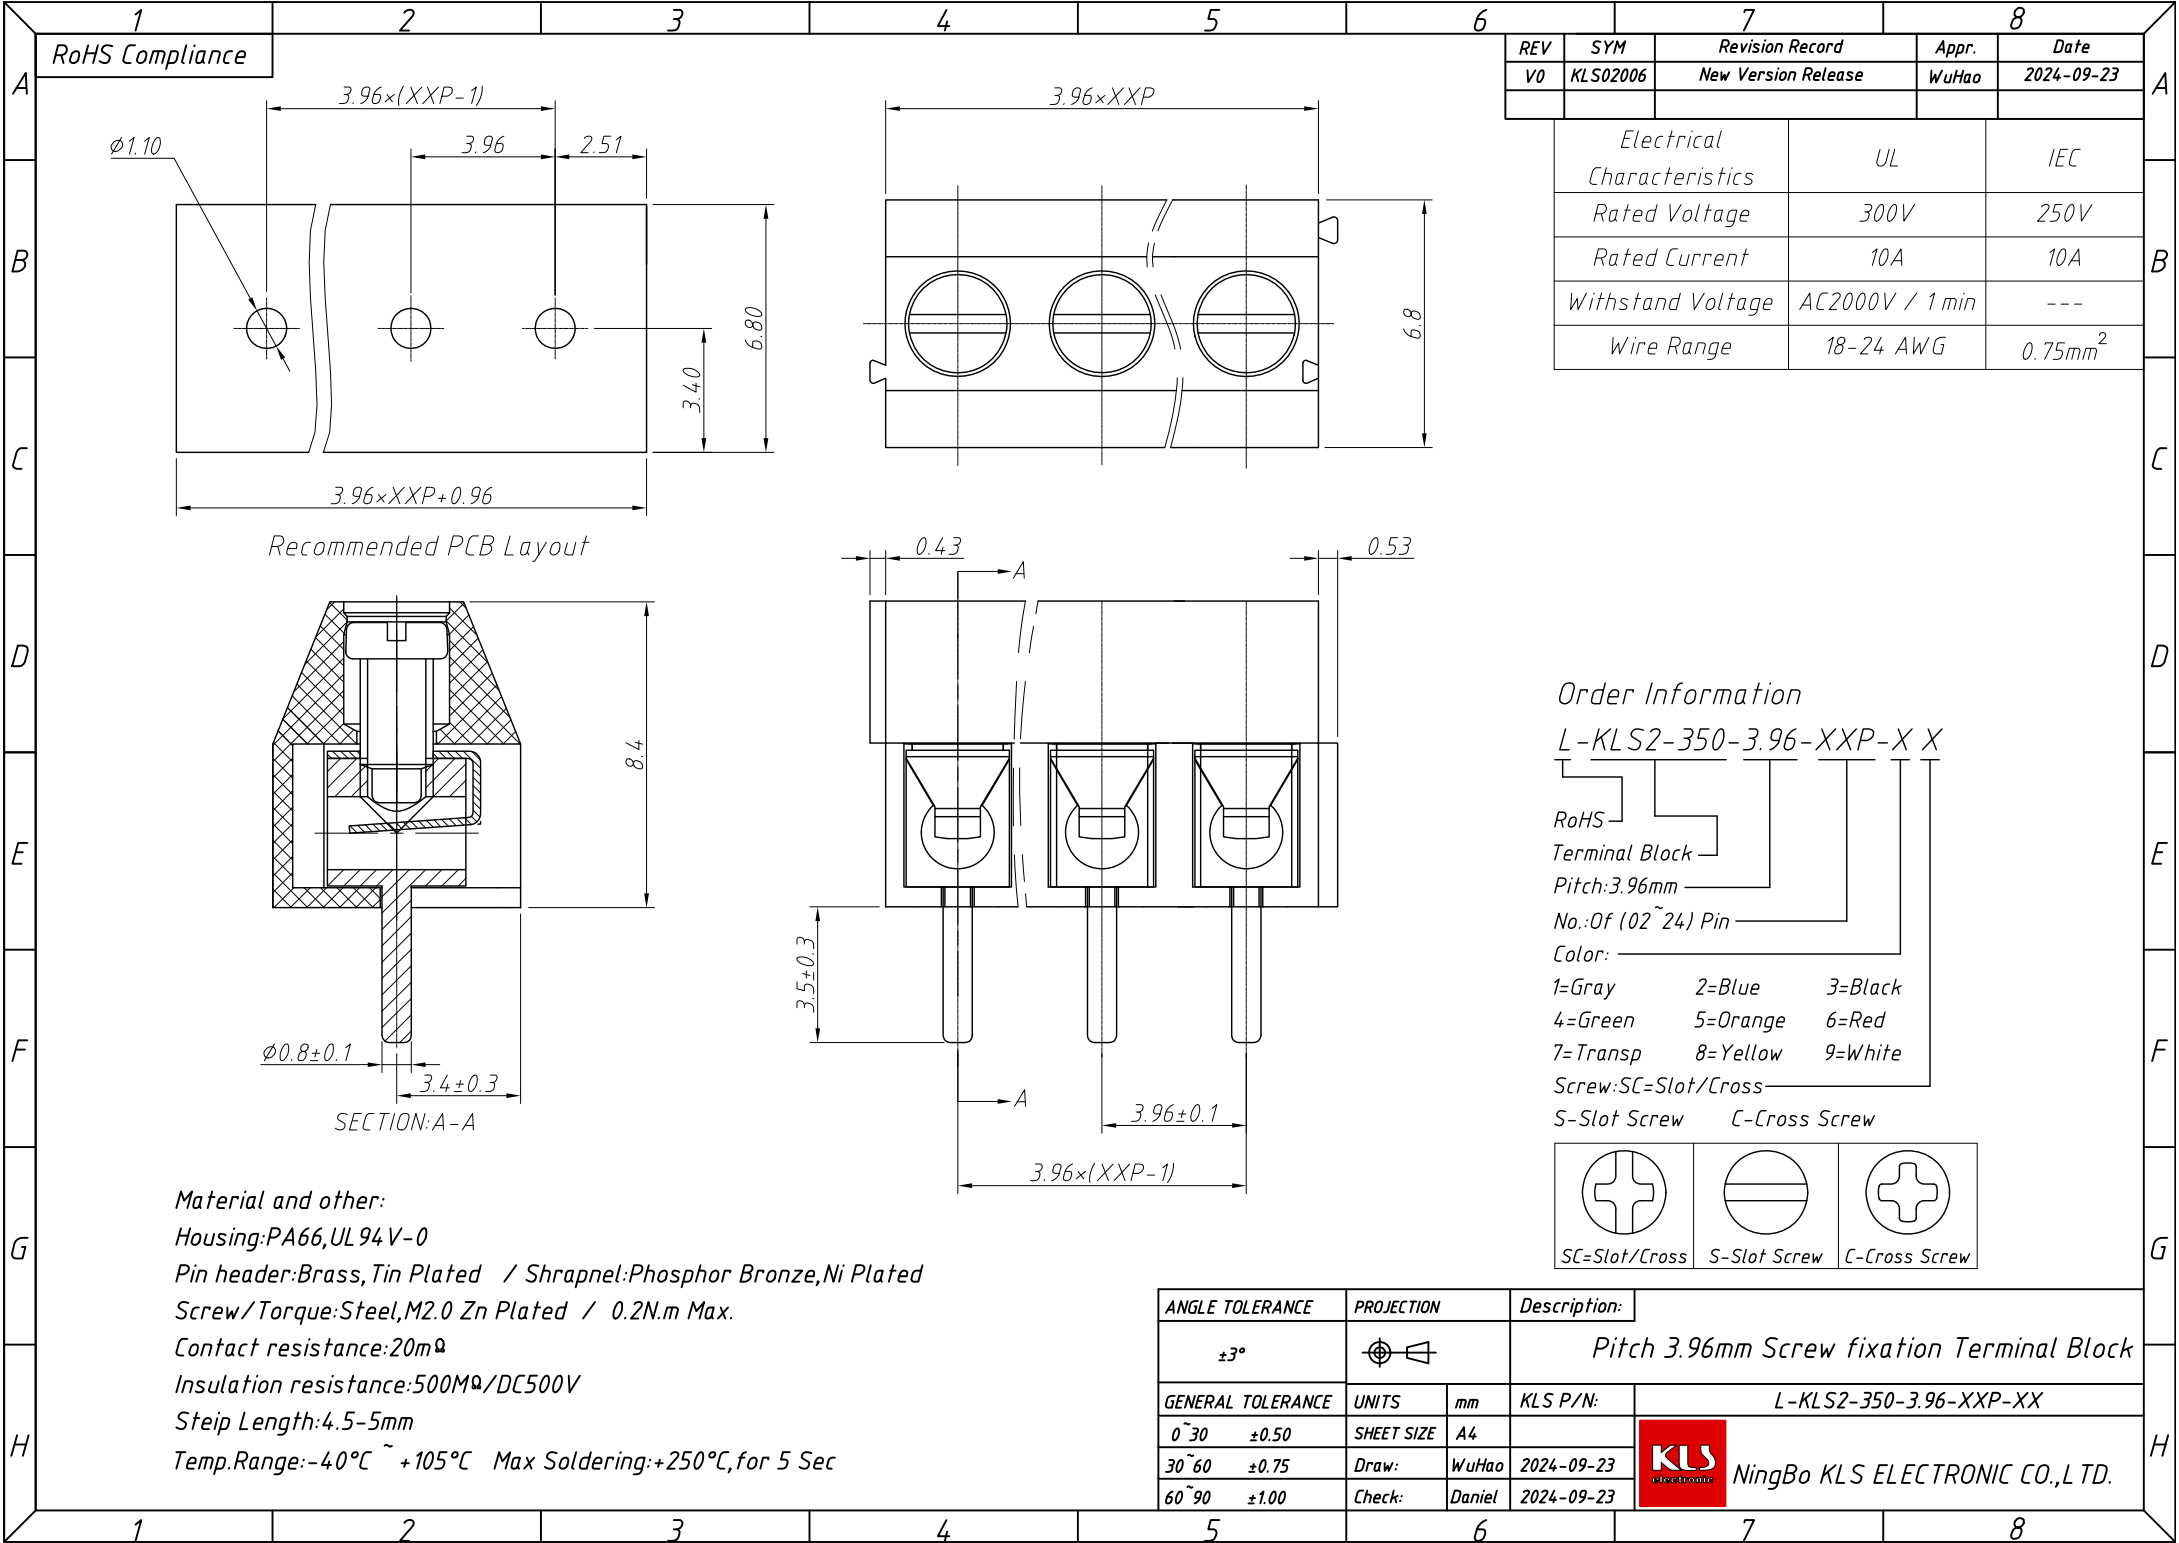

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	WuHao	2024-09-23


Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	10A	10A
Withstand Voltage	AC2000V / 1 min	---
Wire Range	18-24 AWG	0.75mm ²

Recommended PCB Layout

Order Information

L-KLS2-350-3.96-XXP-X X

RoHS
Terminal Block
Pitch:3.96mm
No.:Of (02~24) Pin
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

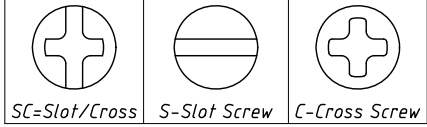

Material and other:
Housing:PA66,UL 94V-0
Pin header:Brass,Tin Plated / Shrapnel:Phosphor Bronze,Ni Plated
Screw/Torque:Steel,M2.0 Zn Plated / 0.2N.m Max.
Contact resistance:20mΩ
Insulation resistance:500MΩ/DC500V
Steip Length:4.5-5mm
Temp.Range:-40℃ ~ +105℃ Max Soldering:+250℃,for 5 Sec

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 3.96mm Screw fixation Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE
30~60	±0.75	Draw:
60~90	±1.00	Check:

KLS P/N:	L-KLS2-350-3.96-XXP-XX
WuHao	2024-09-23
Daniel	2024-09-23

NingBo KLS ELECTRONIC CO.,L TD.