


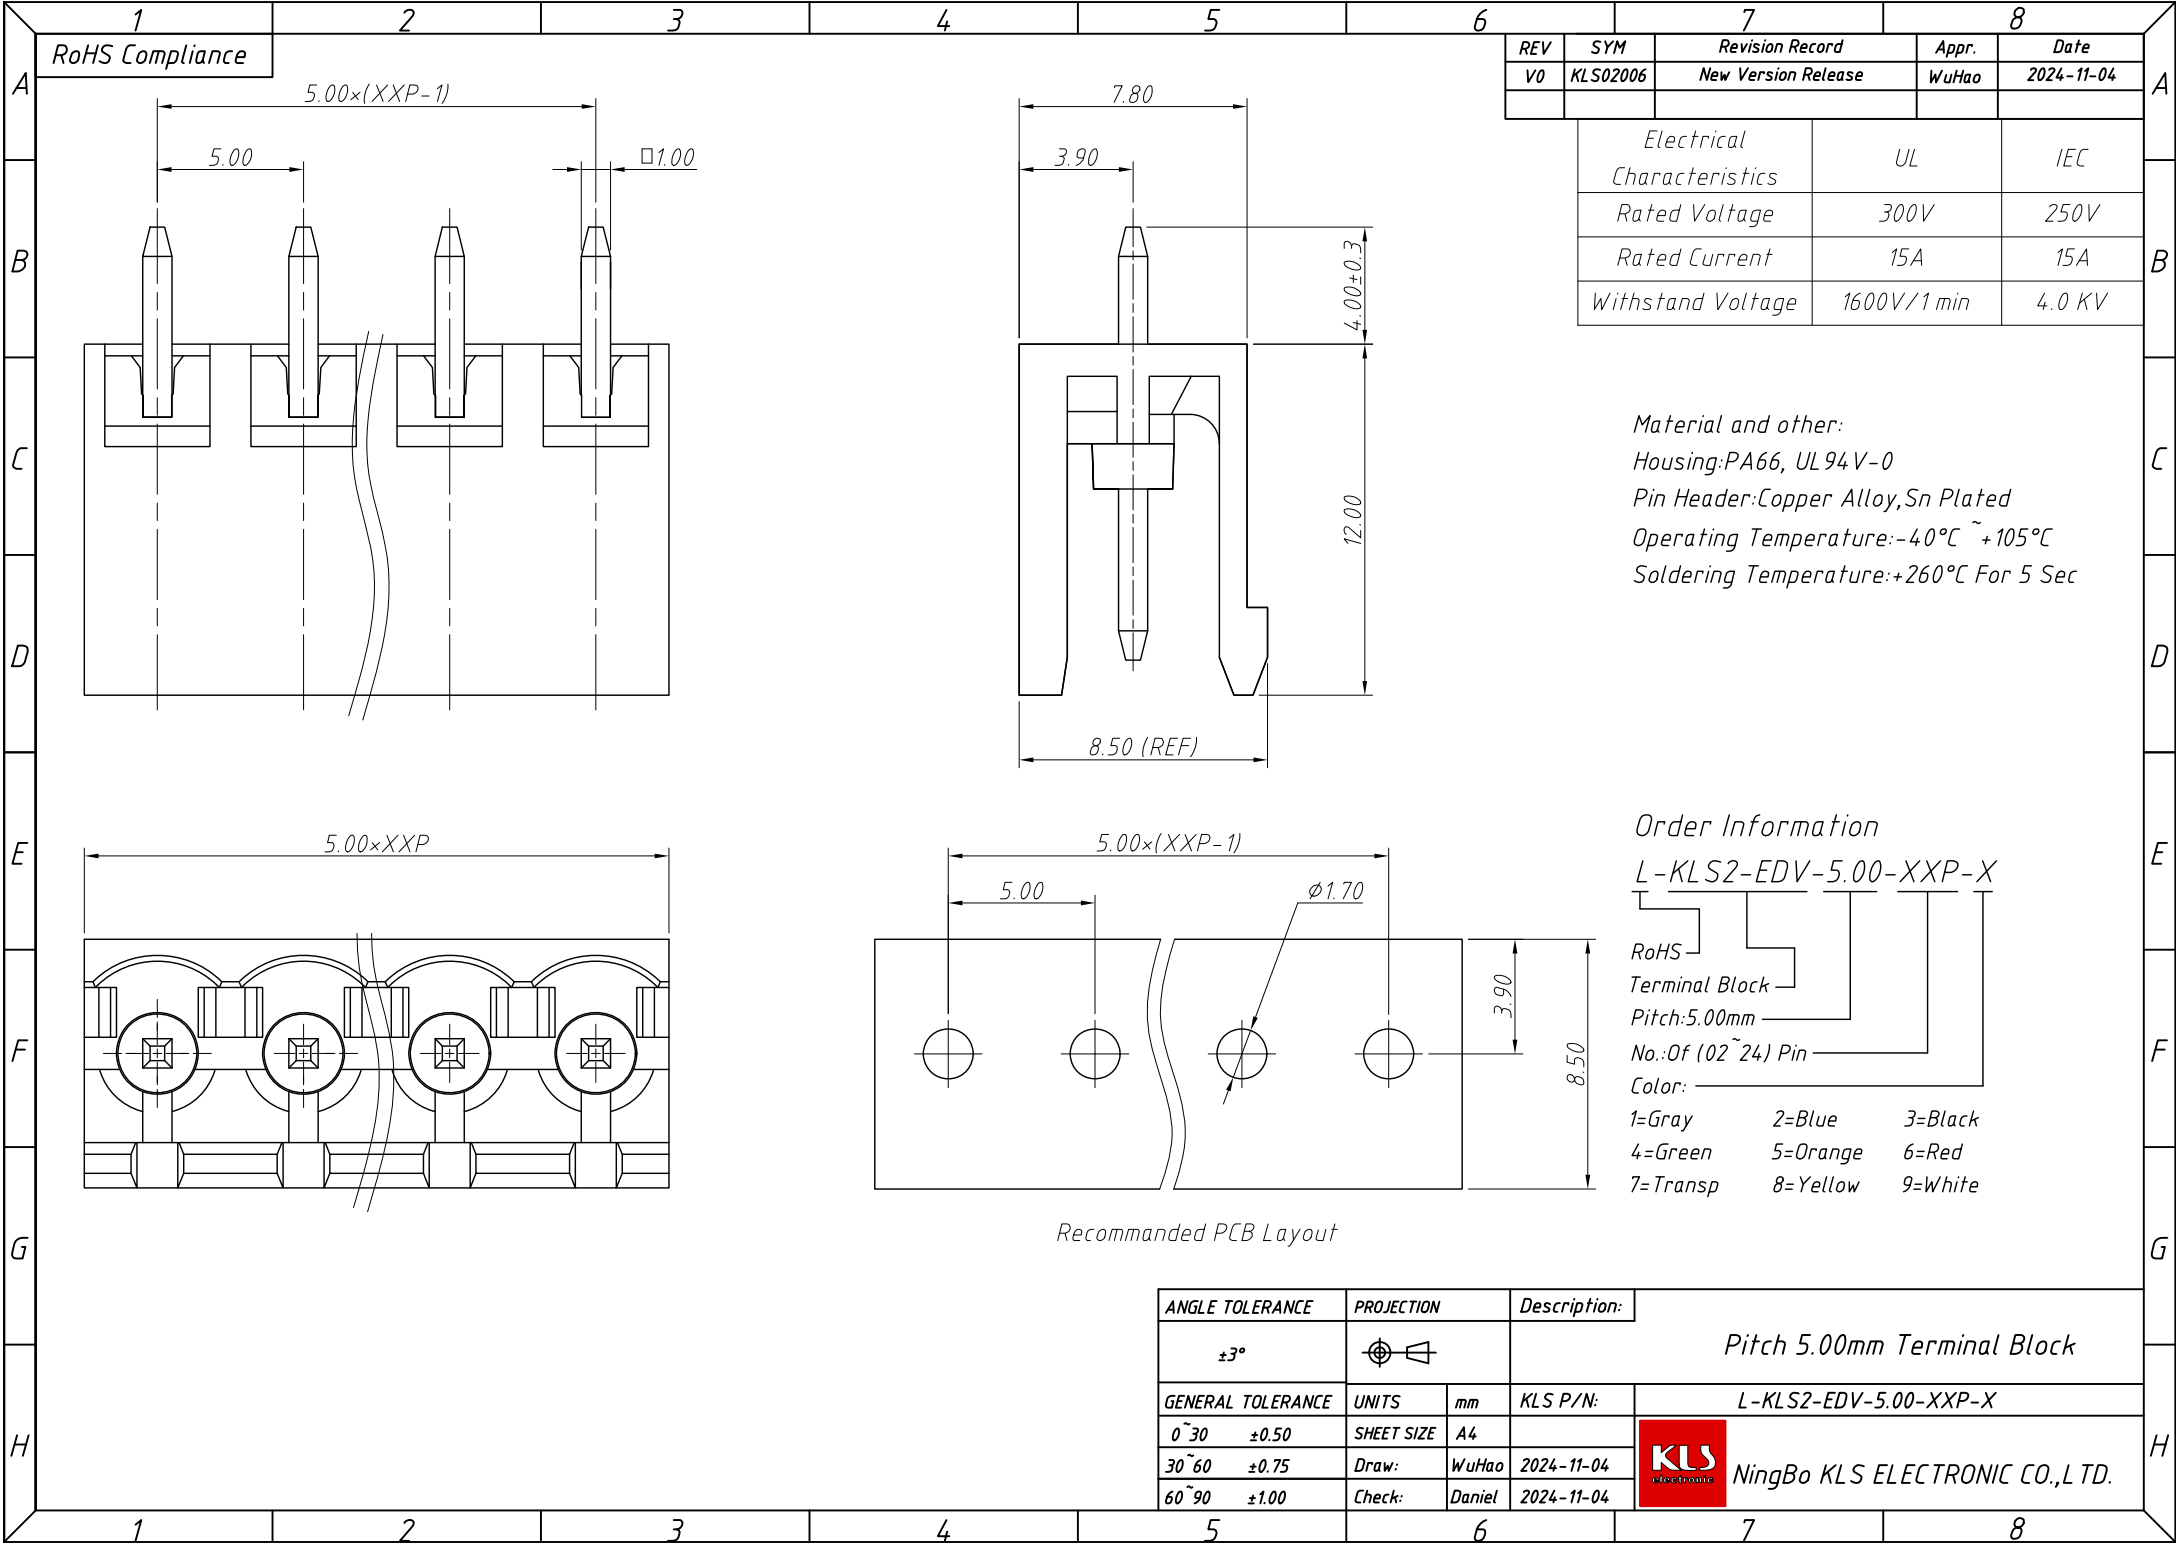

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	WuHao	2024-11-04

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	15A	15A
Withstand Voltage	1600V/1 min	4.0 KV

Material and other:
Housing:PA66, UL 94 V-0
Pin Header:Copper Alloy,Sn Plated
Operating Temperature:-40°C ~ +105°C
Soldering Temperature:+260°C For 5 Sec

Order Information
L-KLS2-EDV-5.00-XXP-X
RoHS
Terminal Block
Pitch:5.00mm
No.:Of (02~24) Pin
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White


Recommanded PCB Layout

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 5.00mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE
30~60	±0.75	Draw:
60~90	±1.00	Check:


WuHao	2024-11-04		NingBo KLS ELECTRONIC CO.,L TD.
Daniel	2024-11-04		

A E

MAX Soldering: +250°C, for 5 Sec

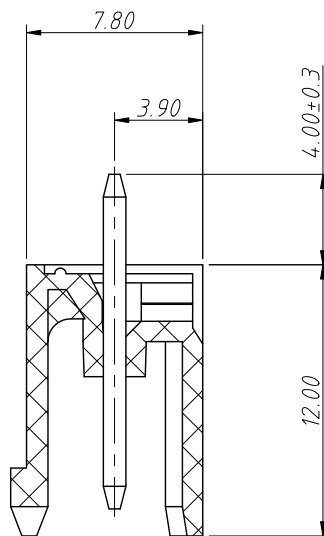

SECTION: A-A

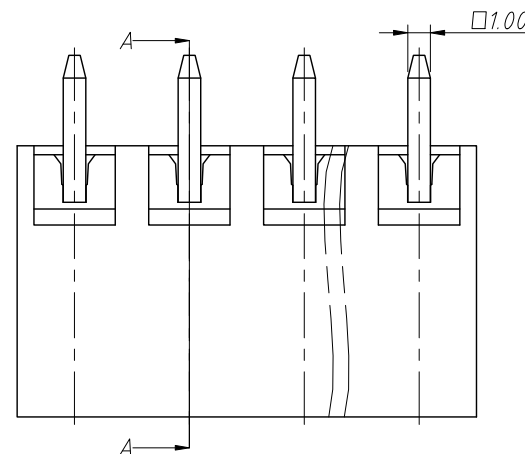

7=Transp 8=Yellow 9=White

A