



RoHS Compliance

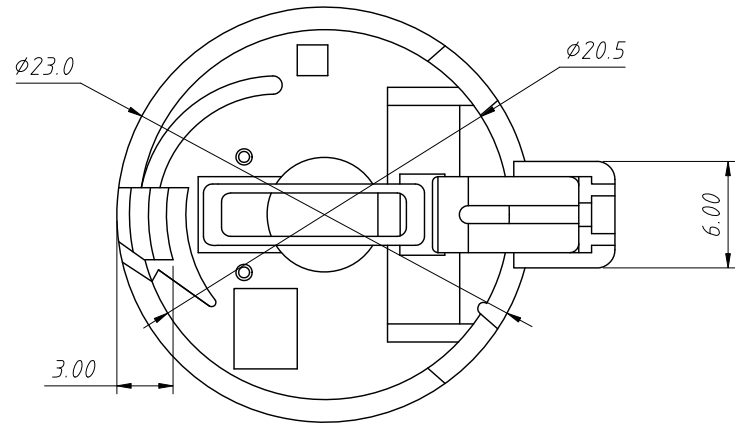


Material:
 Housing:PBT,UL 94 V-0,Black
 Terminal(+):Brass,T=0.30mm
 Terminal(-):Brass,T=0.30mm
 Plating:Sn- plating

Electrical Characteristics:
 Contact Resistance:30mΩ Max
 Insulator Resistance:1000MΩ Min
 Dielectric Voltage:500V AC One Sec Level
 Operating Temperature:-25°C ~ + 85°C

PCB Layout Diagram
 Top View

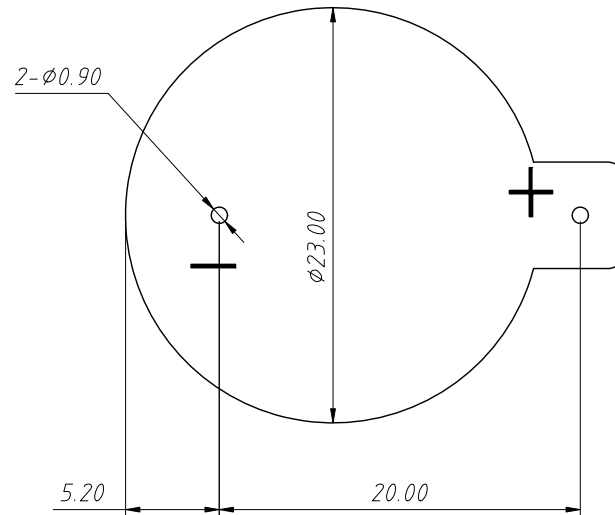

Order Information:
 L-KLS5-CR2032-02
 L: RoHS
 CR2032 Coin
 Battery Holder
 Part Number

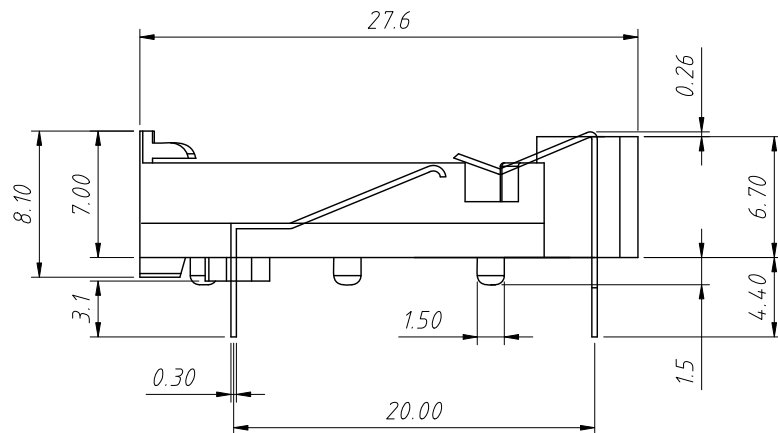

ANGLE TOLERANCE	PROJECTION	Description:	CR2032 DIP COIN CELL RETAINERS, H8.10mm, Tin plated	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N: L-KLS5-CR2032-02	
x.x ±0.30	SHEET SIZE	A4	NingBo KLS ELECTRONIC CO.,L TD.	
x.xx ±0.20	Draw:	Daniel		2022-03-01
x.xxx ±0.10	Check:	Daniel		2022-03-01