


KLS8-0215-M3

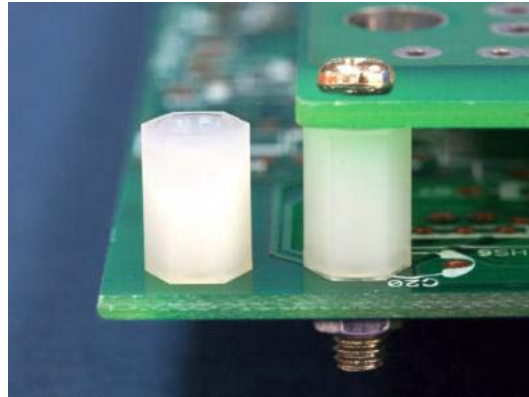

Product Information

Material: NYLON 66(UL94V-2),NATURAL

Working temperature: 0°C~80°C

Dipping Bibulous: 2.5% at 20°C 24H 50% Humidity

Withstand Voltage:2500V/0.5mA/1m

Heat Resistance: B-130°C (30m without melting at 200 °C)

Application: the fixed PC board on the boards, free tools,

P/N	A	UPPER	CHASSIS	Color
		THERD	THERD	
	mm	mm	mm	
L-KLS8-0215-M3-04	4.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-05	5.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-06	6.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-07	7.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-08	8.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-09	9.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-9.5	9.5	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-10	10.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-12	12.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-12A	12.7	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-13	13.5	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-14	14.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-15	15.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-16	16.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-17	17.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-18	18.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-19	19.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-20	20.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-22	22.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-25	25.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-27	27.0	M3x0.5	M3x0.5	Natural

L-KLS8-0215-M3-30	30.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-32	32.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-35	35.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-38	38.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-40	40.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-42	42.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-45	45.0	M3x0.5	M3x0.5	Natural
L-KLS8-0215-M3-49	49.0	M3x0.5	M3x0.5	Natural