


KLS8-0215-M4

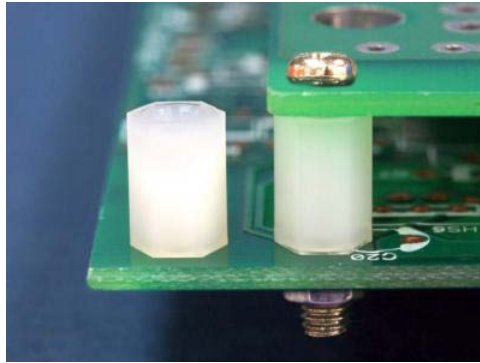

Product Information

Material: NYLON 66(UL94V-2), NATURAL



Working temperature: 0°C-80°C

Dipping Bibulous: 2.5% at 20°C 24H 50% Humidity

Withstand Voltage: 2500V/0.5mA/1m

Heat Resistance: B-130°C (30m without melting at 200°C)

Application: the fixed PC board on the boards, free tools

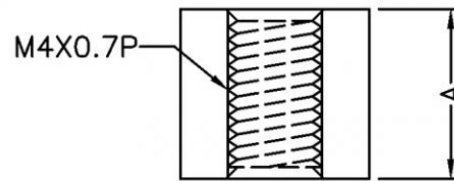

P/N	A, mm	UPPER THERD, mm	CHASSIS THERD, mm
L-KLS8-0215-M4-05	5.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-06	6.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-07	7.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-08	8.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-09	9.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-10	10.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-11	11.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-12	12.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-12H	12.7	M4x0.7	M4x0.7
L-KLS8-0215-M4-14	14.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-15	15.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-16	16.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-20	20.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-22	22.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-25	25.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-30	30.0	M4x0.7	M4x0.7
L-KLS8-0215-M4-40	40.0	M4x0.7	M4x0.7