

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze

Pin Plated: Gold 3u" over 50u" nickel

Electrical:




Current Rating: 1 AMP

Insulator Resistance: 1000M Ohm min. at 500 VDC

Dielectric Withstanding Voltage: 500 VAC / Minute

Contact Resistance: 30m Ohm max.

Temperature: -55° C ~ +105° C

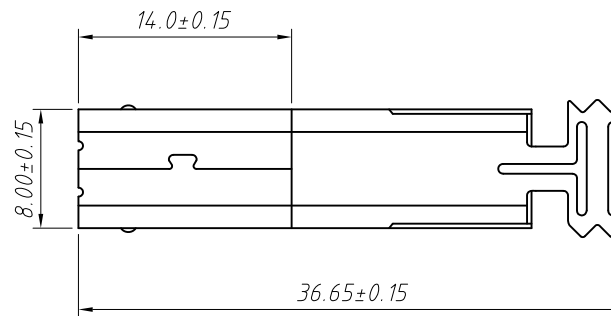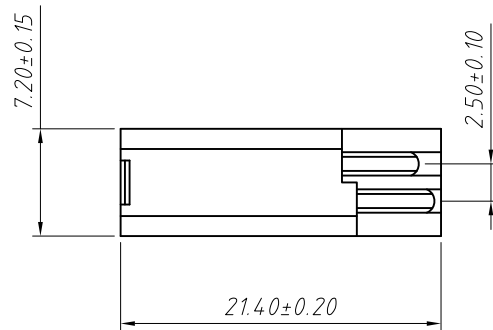

Order Information

L-KLS1- 184 - B

Color: W=White B=Black

USB 2.0

RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	CONN PLUG USB B-MALE SOLDER
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	KLS P/N: L-KLS1-184-X
ANGLE TOLERANCE	Check by:		 NingBo KLS ELECTRONIC CO.,L TD.
X. ±5°	Date	2018-03-01	
.X ±3°	SHEET	1 OF 1	
.XX ±2°			