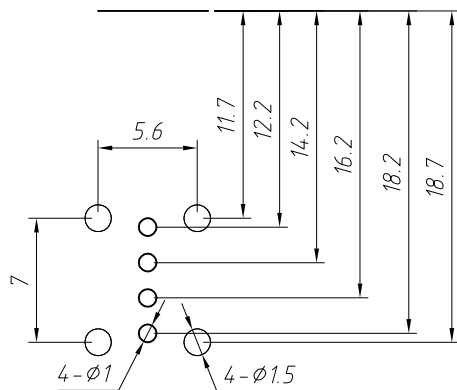
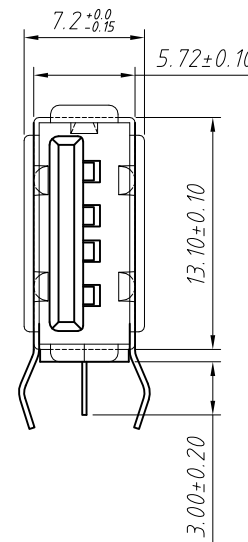
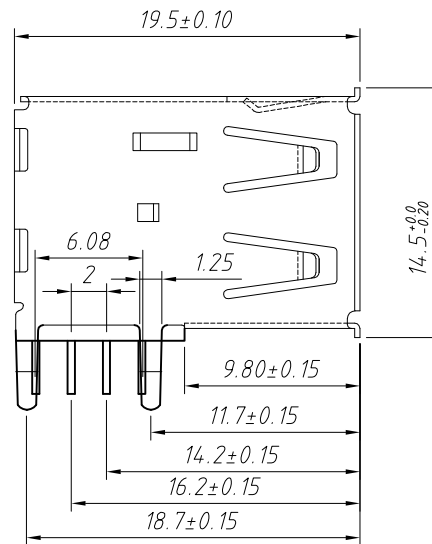
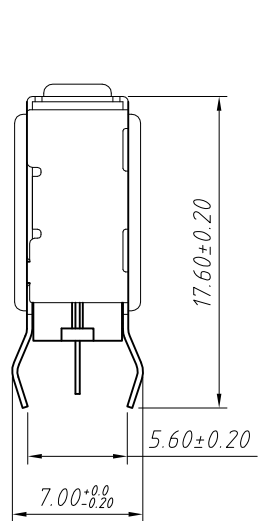


Material

Housing: Hing Temperature Thermoplastic, UL 94 V-0
PBT, Black/White.

Contact: Copper Alloy C2680.

Shell: Copper Alloy C2680/SPCC.

Finish:

Contact: Plated Gold In Mating Area; Tin On Solder Tails.
Shell: Nickel Plating.

Electrical:

Current Rating: 1.5A/Contact Terminal.

Voltage Rating: 30V DC

Contact Resistance: 30mΩ Max.

Dielectric Withstanding Voltage: 500 V AC AT Sea Level.

Insulation Resistance: 1000MΩ Min.

Connector Mate and Unmated Force

Mate Force: 3.75kgf Max.

Unmated Force: 1.02kgf Min.

Terminal Retention: 1.2kgf Min.

Order Information

L-KLS1- 191 - 4P-B

Color: W=White B=Black

CONN USB 2.0

RoHS

PROJECTION		Description:
UNITS	mm	CONN COM TYPE A USB Female R/A
SCALE	1:1	
Draw by:	Jenny	KLS P/N: L-KLS1-191-4P-X
Check by:		NingBo KLS ELECTRONIC CO.,L TD.
Date	2018-03-01	
SHEET	1 OF 1	