


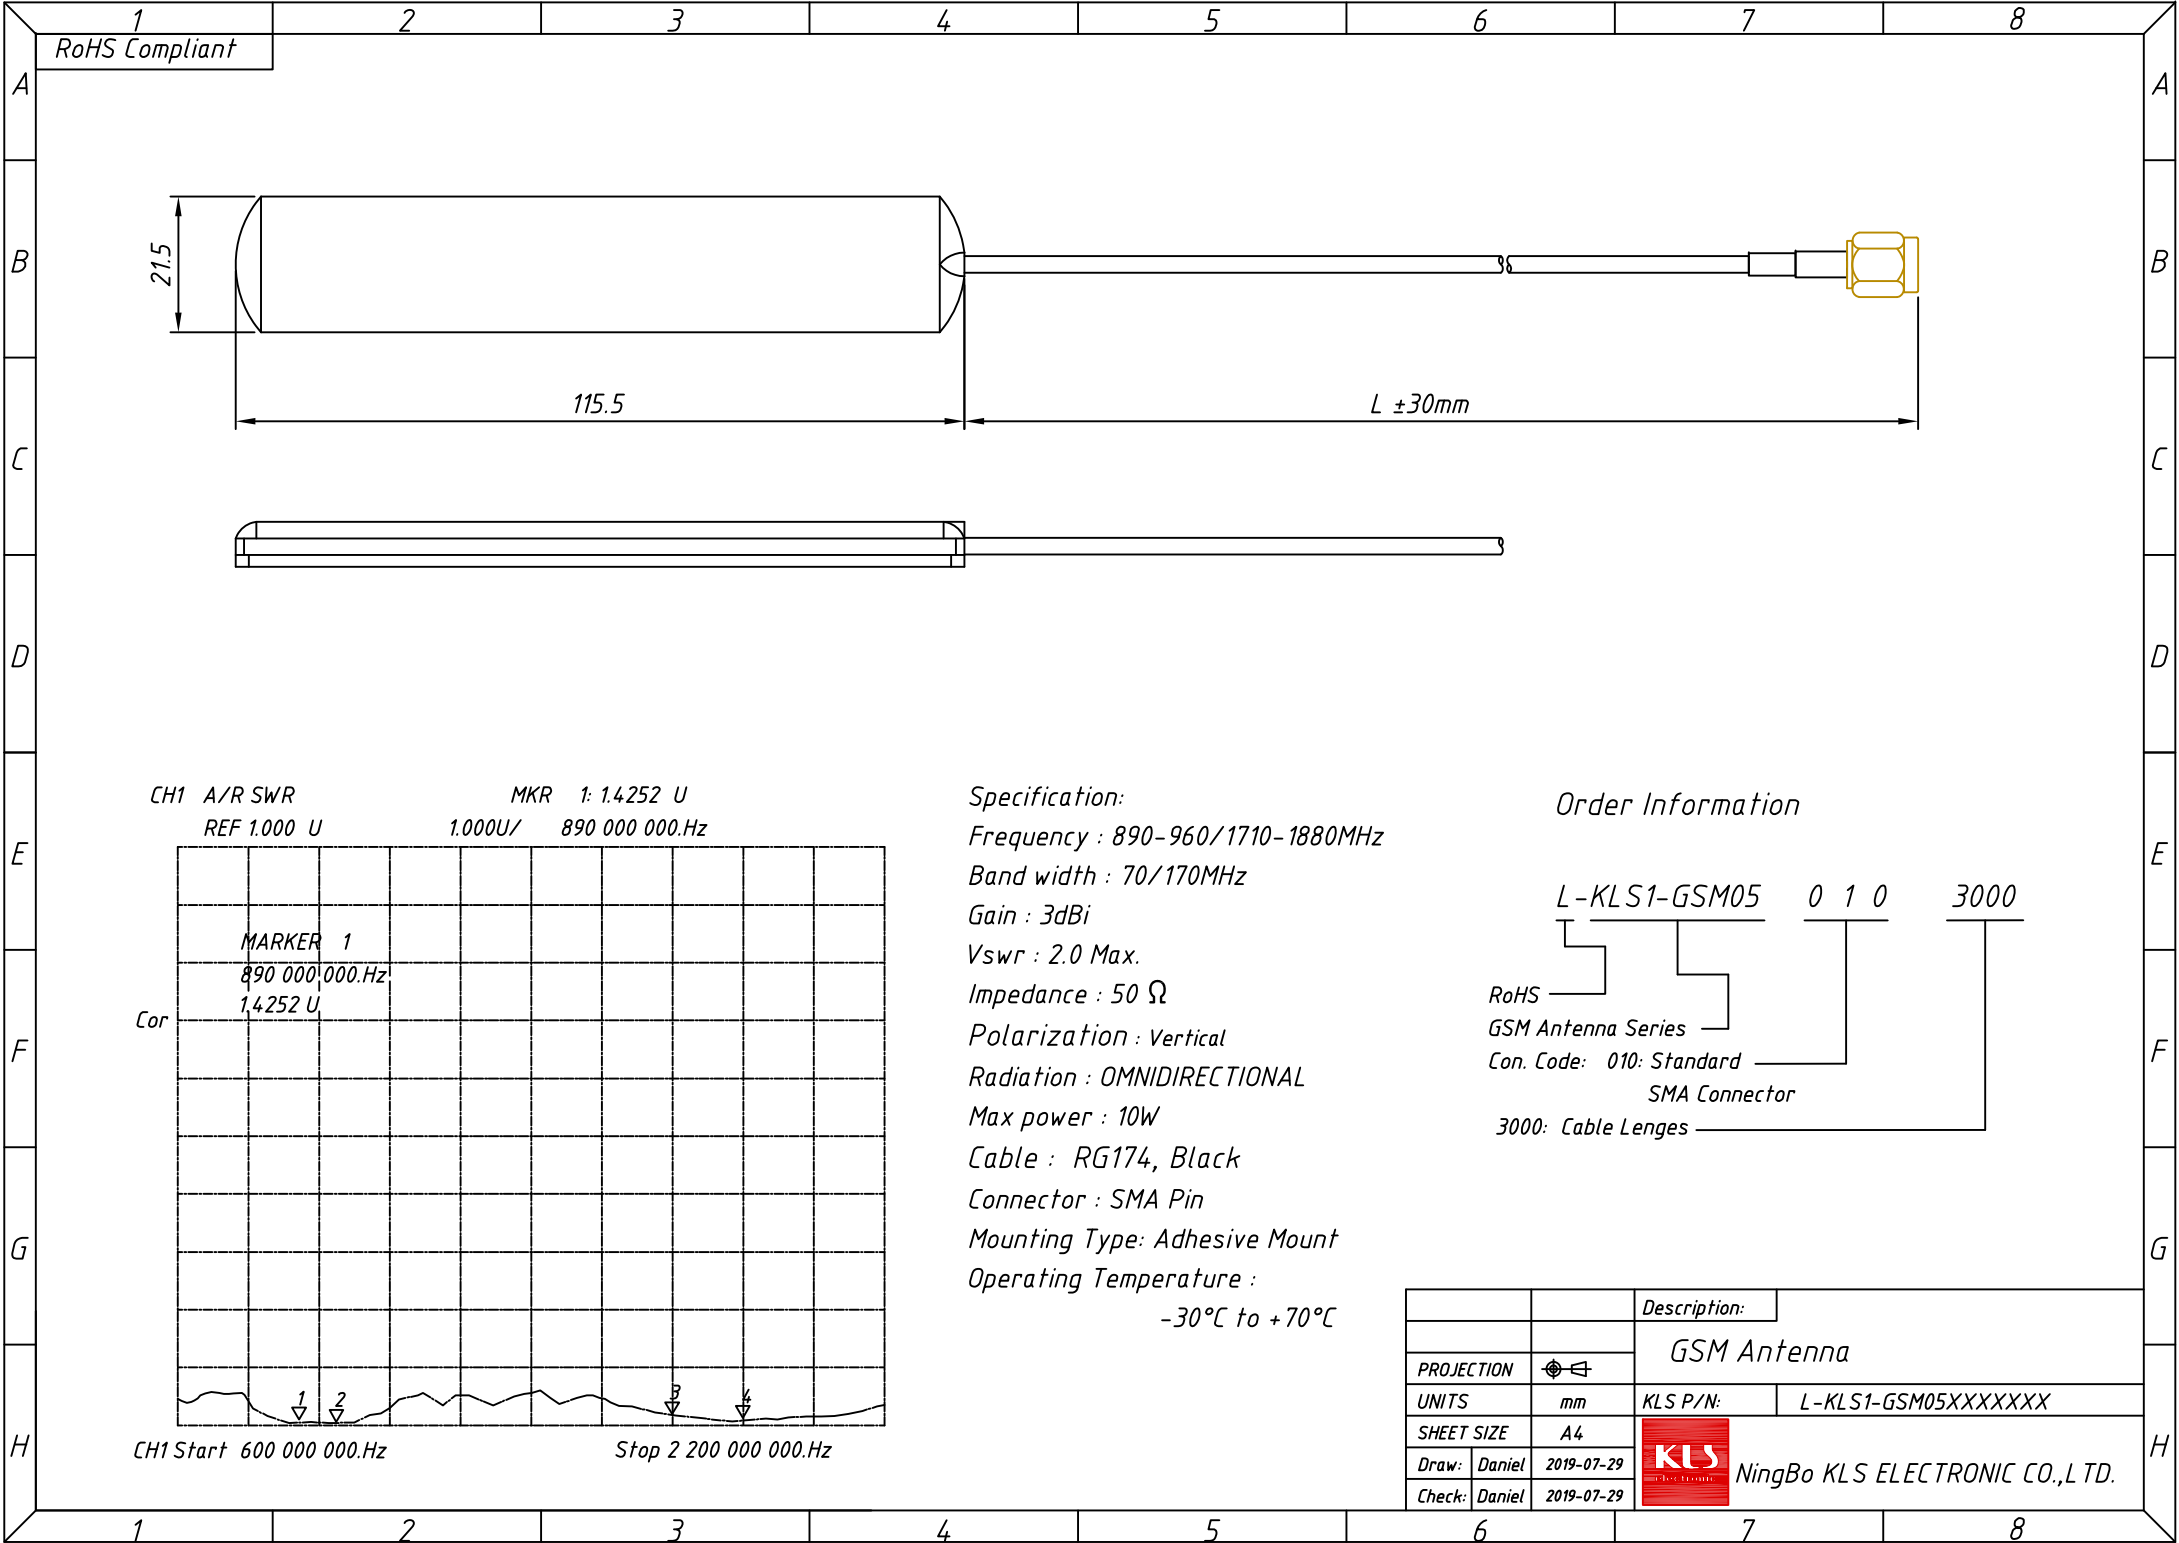

1
RoHS Compliant

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F


F

G

G


H

H

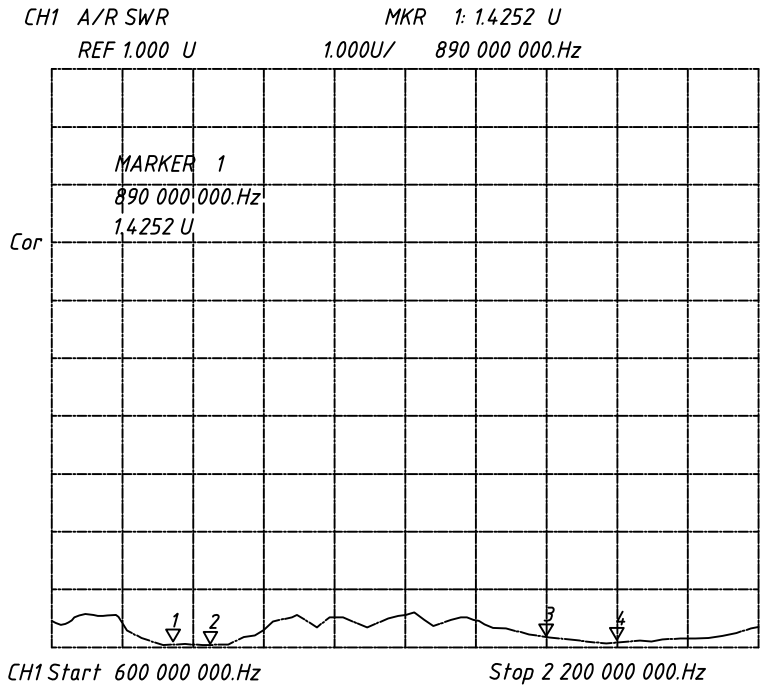

Specification:
Frequency : 890-960/1710-1880MHz
Band width : 70/170MHz
Gain : 3dBi
Vswr : 2.0 Max.
Impedance : 50 Ω
Polarization : Vertical
Radiation : OMNIDIRECTIONAL
Max power : 10W
Cable : RG174, Black
Connector : SMA Pin
Mounting Type: Adhesive Mount
Operating Temperature :
-30°C to +70°C

Order Information

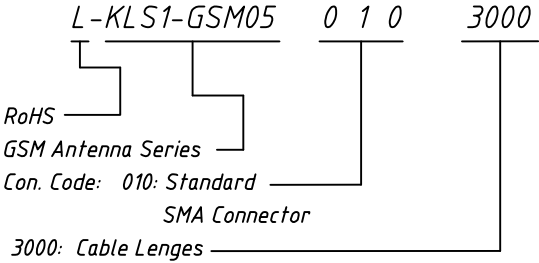

		Description:	
		GSM Antenna	
PROJECTION			
UNITS	mm	KLS P/N:	L-KLS1-GSM05XXXXXXXX
SHEET SIZE	A4		
Draw:	Daniel	2019-07-29	NingBo KLS ELECTRONIC CO.,L TD.
Check:	Daniel	2019-07-29	