
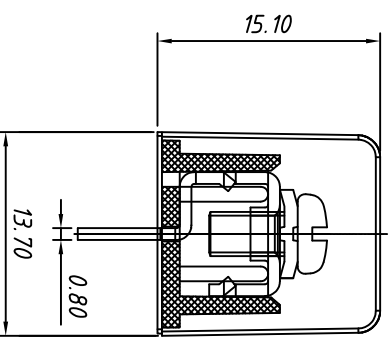


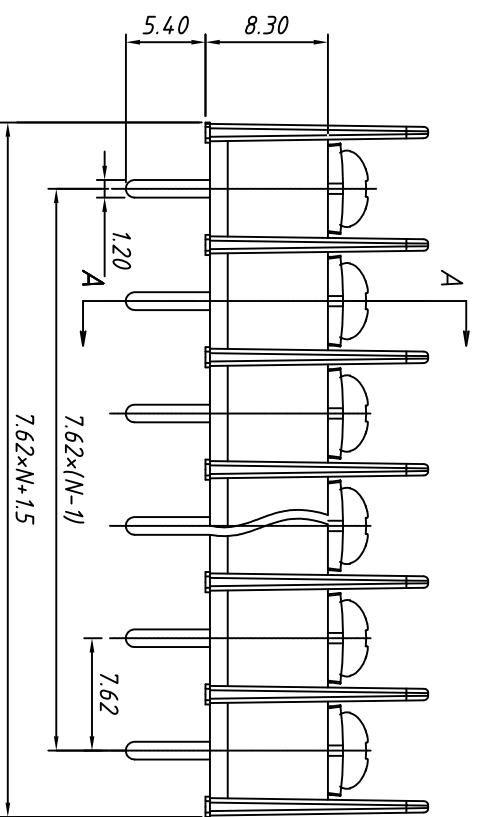


SECTION A-A

Material
Screw: M3.0, Steel, Ni Plated
Pin header: Brass, 0.8t, Tin Plated
Housing: PA66, UL94V-0,Black


Electrical
Rated voltage: 300V
Rated current: 15A
Wire range: 22~14AWG 2.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1min

Mechanical
Temp. Range: -40 °C ~ +105 °C
Torque: 0.5Nm (4.5Lb.in)

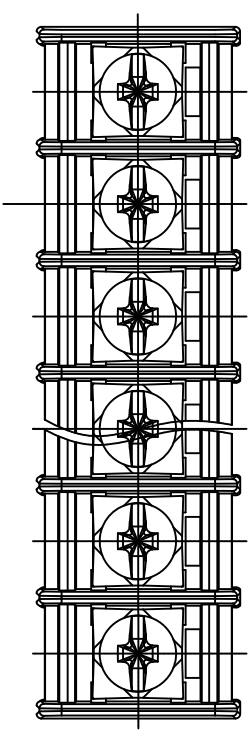

Order Information

L-KLS2- 25 A - 7.62-XXP-B

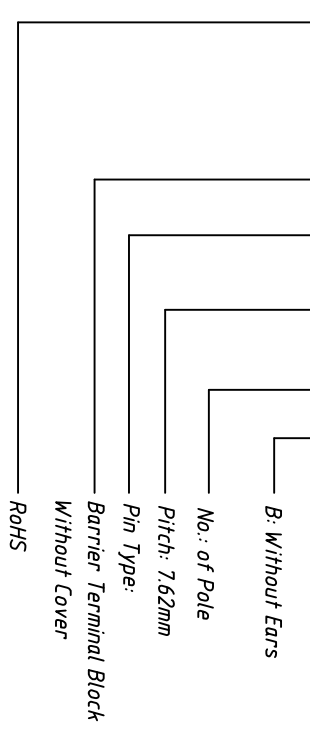

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION			Description:
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	Barrier TERM BLOCK 7.62MM	
.XX	±0.25	.XX	±2°	KLS P/N:			
Draw by: Date		2018-02-26					
Check by:: Date		2018-02-26					
SCALE		SHEET		OF		Ningbo KLS ELECTRONIC CO.,LTD.	



Ningbo KLS ELECTRONIC CO.,LTD.