


Switch

Toggle Switch Series

KLS7-MS-201-A1 Miniature Toggle Switch Series

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
Contact Resistance: 20MΩ max
Insulation Resistance: 500V DC 1000MΩ Min
Dielectric Strength: 1500V AC 1 Minute
Operating Temperature: -55°C~+85°C
Electrical Life :20,000 cycles

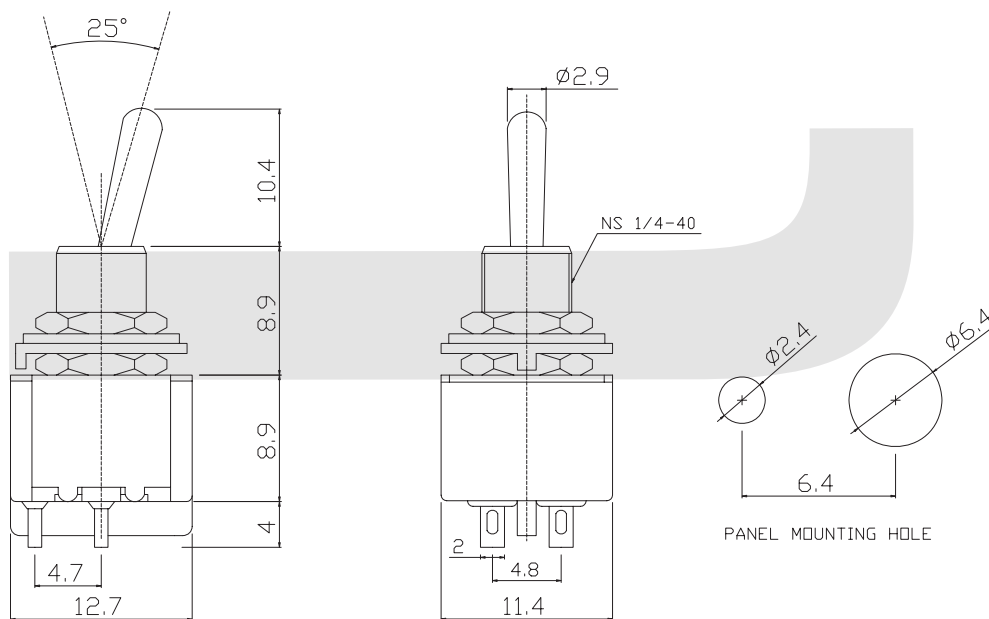

ORDER INFORMATION

Part Number	KLS7- MS-2 01-A 1 X X	BRACKET: T=With Bracket None=Without Bracket
MS: Miniature Toggle Switch Series		Handle Cap Type: R=Red B=Black W=White Y=Yello G=Green BL=Blue
POLES: 1=Single Pole 2=Double Pole		Terminal Type: 1=Solder terminal 2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
CIRCUIT: 01=ON-OFF 02=ON-ON 03=ON-OFF-ON		Handle Type: A=Standard C=Short


Switch

Toggle Switch Series

KLS7-MS-202-A1 Miniature Toggle Switch Series

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
Contact Resistance: 20MΩ max
Insulation Resistance: 500V DC 1000MΩ Min
Dielectric Strength: 1500V AC 1 Minute
Operating Temperature: -55°C~+85°C
Electrical Life :20,000 cycles

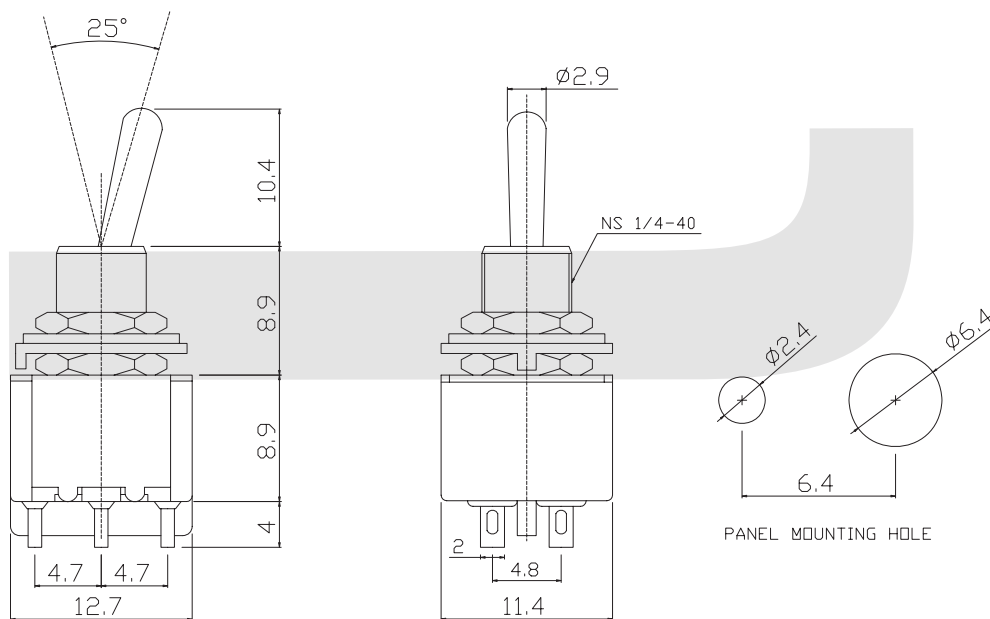

ORDER INFORMATION

Part Number	KLS7-MS-202-A1XX	BRACKET: T=With Bracket None=Without Bracket
MS: Miniature Toggle Switch Series		Handle Cap Type: R=Red B=Black W=White Y=Yellow G=Green BL=Blue
POLES: 1=Single Pole 2=Double Pole		Terminal Type: 1=Solder terminal 2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
CIRCUIT: 01=ON-OFF 02=ON-ON 03=ON-OFF-ON		Handle Type: A=Standard C=Short


Switch

Toggle Switch Series

KLS7-MS-201-A2 Miniature Toggle Switch Series

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
Contact Resistance: 20MΩ max
Insulation Resistance: 500V DC 1000MΩ Min
Dielectric Strength: 1500V AC 1 Minute
Operating Temperature: -55°C~+85°C
Electrical Life :20,000 cycles

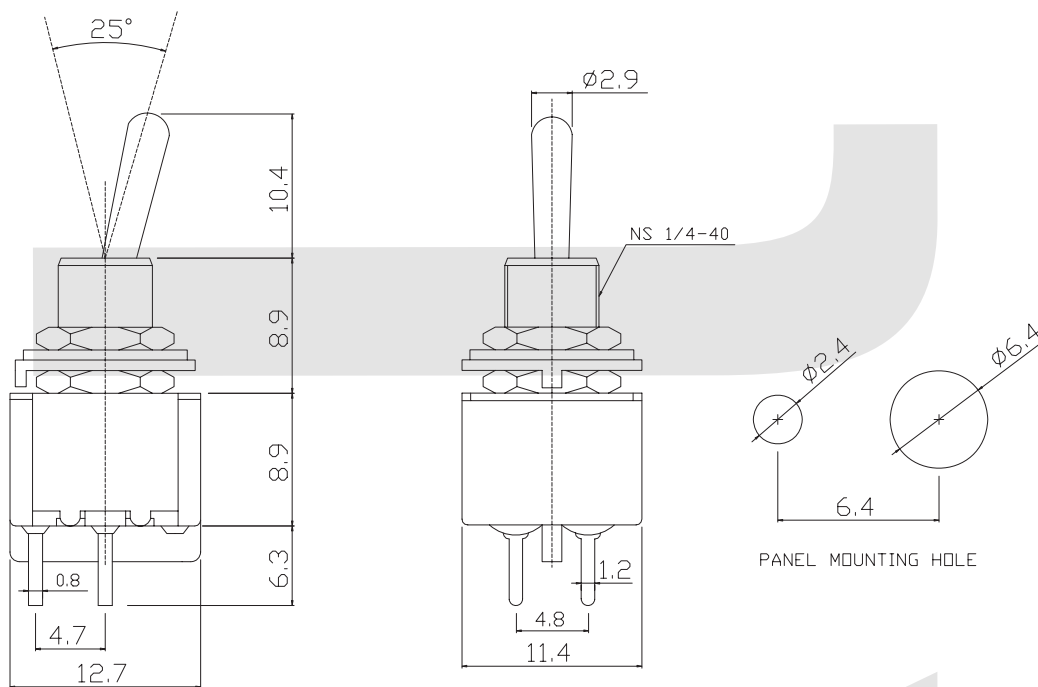

ORDER INFORMATION

Part Number	KLS7-	MS-2	01-A	2	X	X	
MS: Miniature Toggle Switch Series							
POLES: 1=Single Pole 2=Double Pole							
CIRCUIT: 01=ON-OFF 02=ON-ON 03=ON-OFF-ON							
							BRACKET: T=With Bracket None=Without Bracket
							Handle Cap Type: R=Red B=Black W=White Y=Yellow G=Green BL=Blue
							Terminal Type: 1=Solder terminal 2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
							Handle Type: A=Standard C=Short


Switch

Toggle Switch Series

KLS7-MS-202-A2 Miniature Toggle Switch Series

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
Contact Resistance: 20MΩ max
Insulation Resistance: 500V DC 1000MΩ Min
Dielectric Strength: 1500V AC 1 Minute
Operating Temperature: -55°C~+85°C
Electrical Life :20,000 cycles

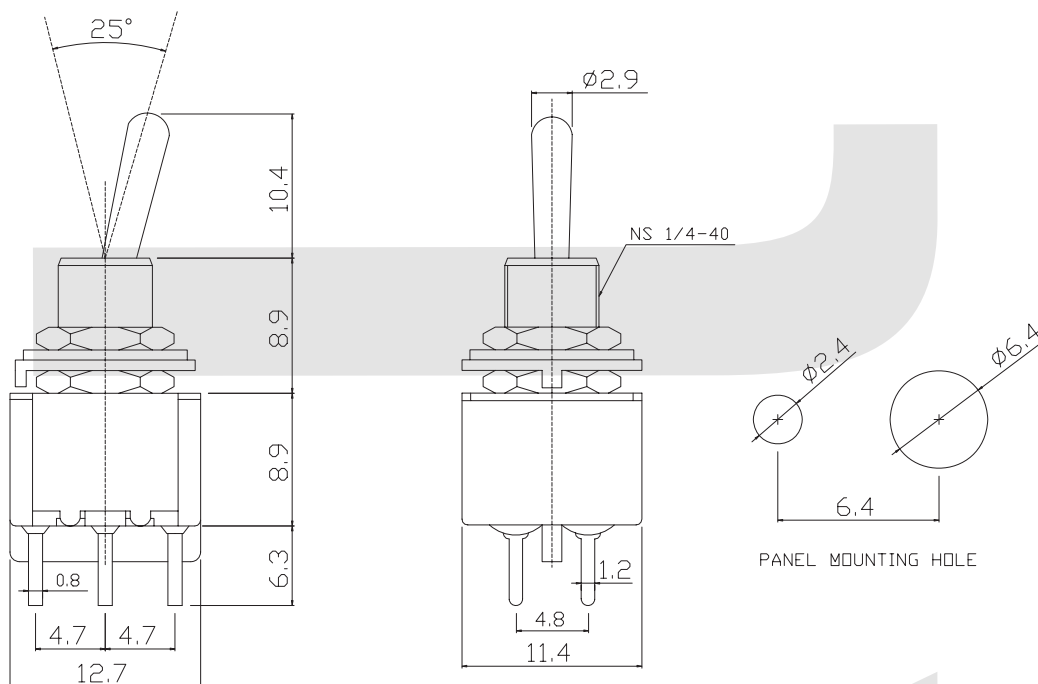

ORDER INFORMATION

Part Number	KLS7-	MS-2	02-A	2	X	X	
MS: Miniature Toggle Switch Series							
POLES: 1=Single Pole 2=Double Pole							
CIRCUIT: 01=ON-OFF 02=ON-ON 03=ON-OFF-ON							
							BRACKET: T=With Bracket None=Without Bracket
							Handle Cap Type: R=Red B=Black W=White Y=Yello G=Green BL=Blue
							Terminal Type: 1=Solder terminal 2=Pc terminal 3=Pc-H terminal 4=Pc-V terminal
							Handle Type: A=Standard C=Short