


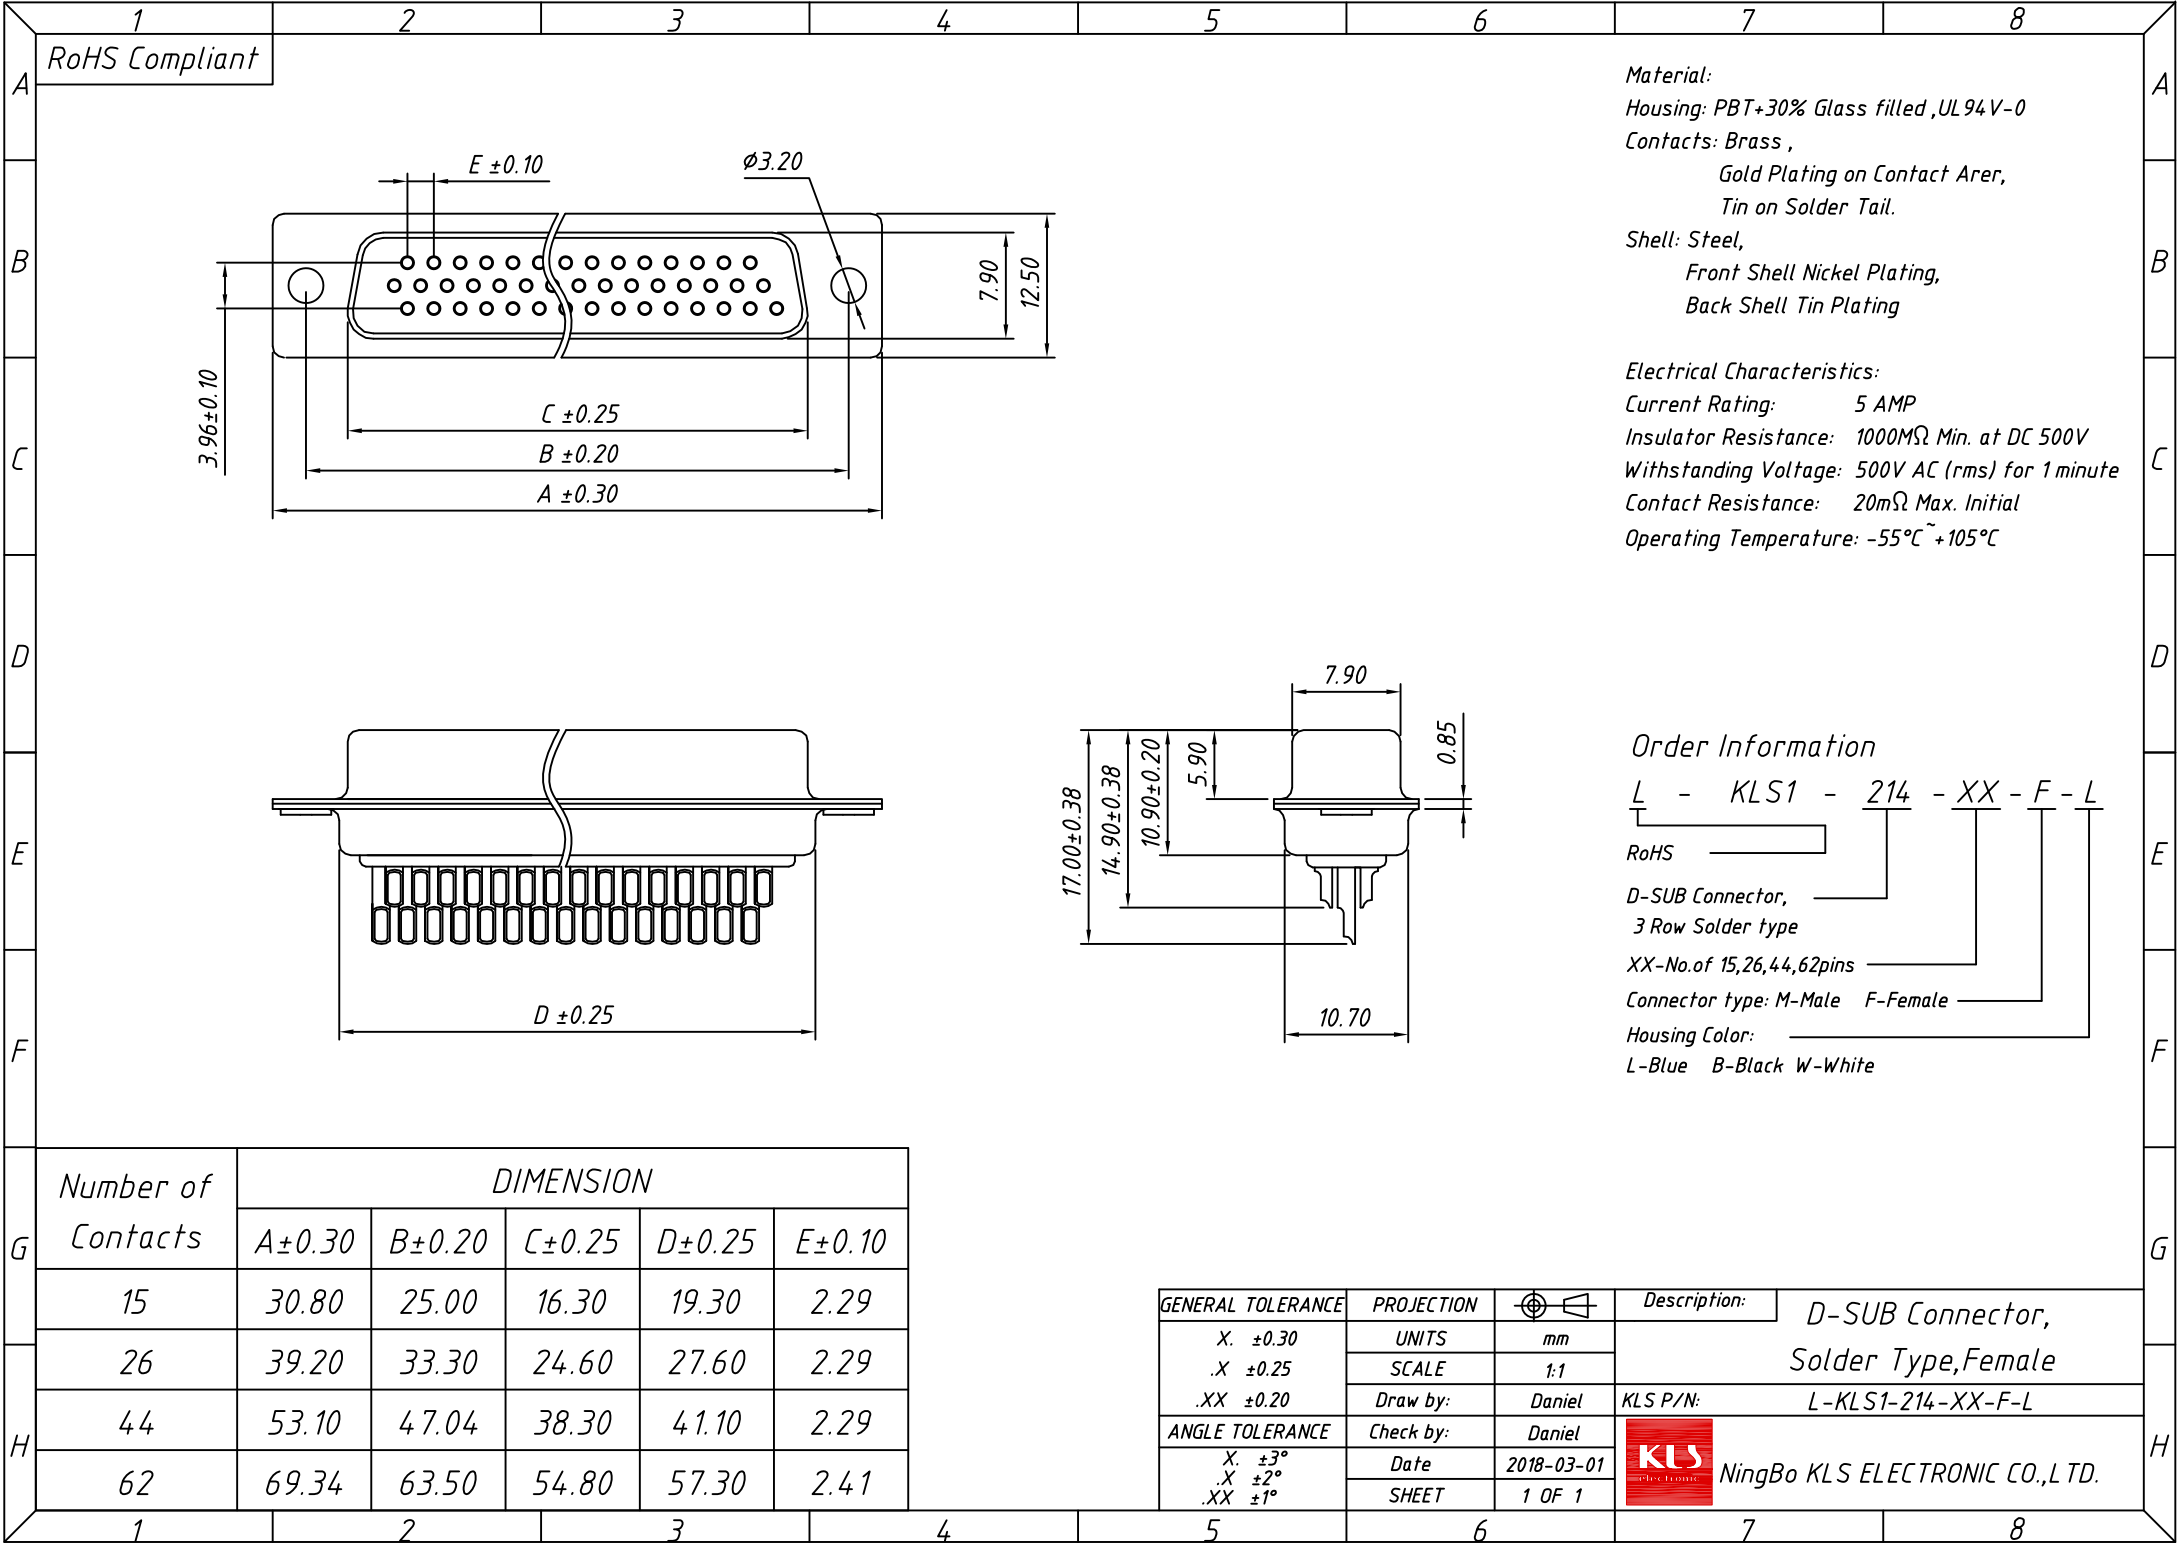

1
RoHS Compliant

2

3

4

5

6

7

8

Material:
Housing: PBT+30% Glass filled ,UL 94V-0
Contacts: Brass ,
Gold Plating on Contact Arer,
Tin on Solder Tail.
Shell: Steel,
Front Shell Nickel Plating,
Back Shell Tin Plating


Electrical Characteristics:
Current Rating: 5 AMP
Insulator Resistance: 1000M Ω Min. at DC 500V
Withstanding Voltage: 500V AC (rms) for 1 minute
Contact Resistance: 20m Ω Max. Initial
Operating Temperature: -55 $^{\circ}$ C ~ +105 $^{\circ}$ C

Order Information

L - KLS1 - 214 - XX - F - L
RoHS
D-SUB Connector,
3 Row Solder type
XX-No.of 15,26,44,62pins
Connector type: M-Male F-Female
Housing Color:
L-Blue B-Black W-White

Number of Contacts	DIMENSION				
	A ± 0.30	B ± 0.20	C ± 0.25	D ± 0.25	E ± 0.10
15	30.80	25.00	16.30	19.30	2.29
26	39.20	33.30	24.60	27.60	2.29
44	53.10	47.04	38.30	41.10	2.29
62	69.34	63.50	54.80	57.30	2.41

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.30	UNITS	mm	D-SUB Connector, Solder Type,Female
.X ± 0.25	SCALE	1:1	
.XX ± 0.20	Draw by:	Daniel	KLS P/N: L-KLS1-214-XX-F-L
ANGLE TOLERANCE	Check by:	Daniel	
X. $\pm 3^{\circ}$	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X $\pm 2^{\circ}$	SHEET	1 OF 1	
.XX $\pm 1^{\circ}$			

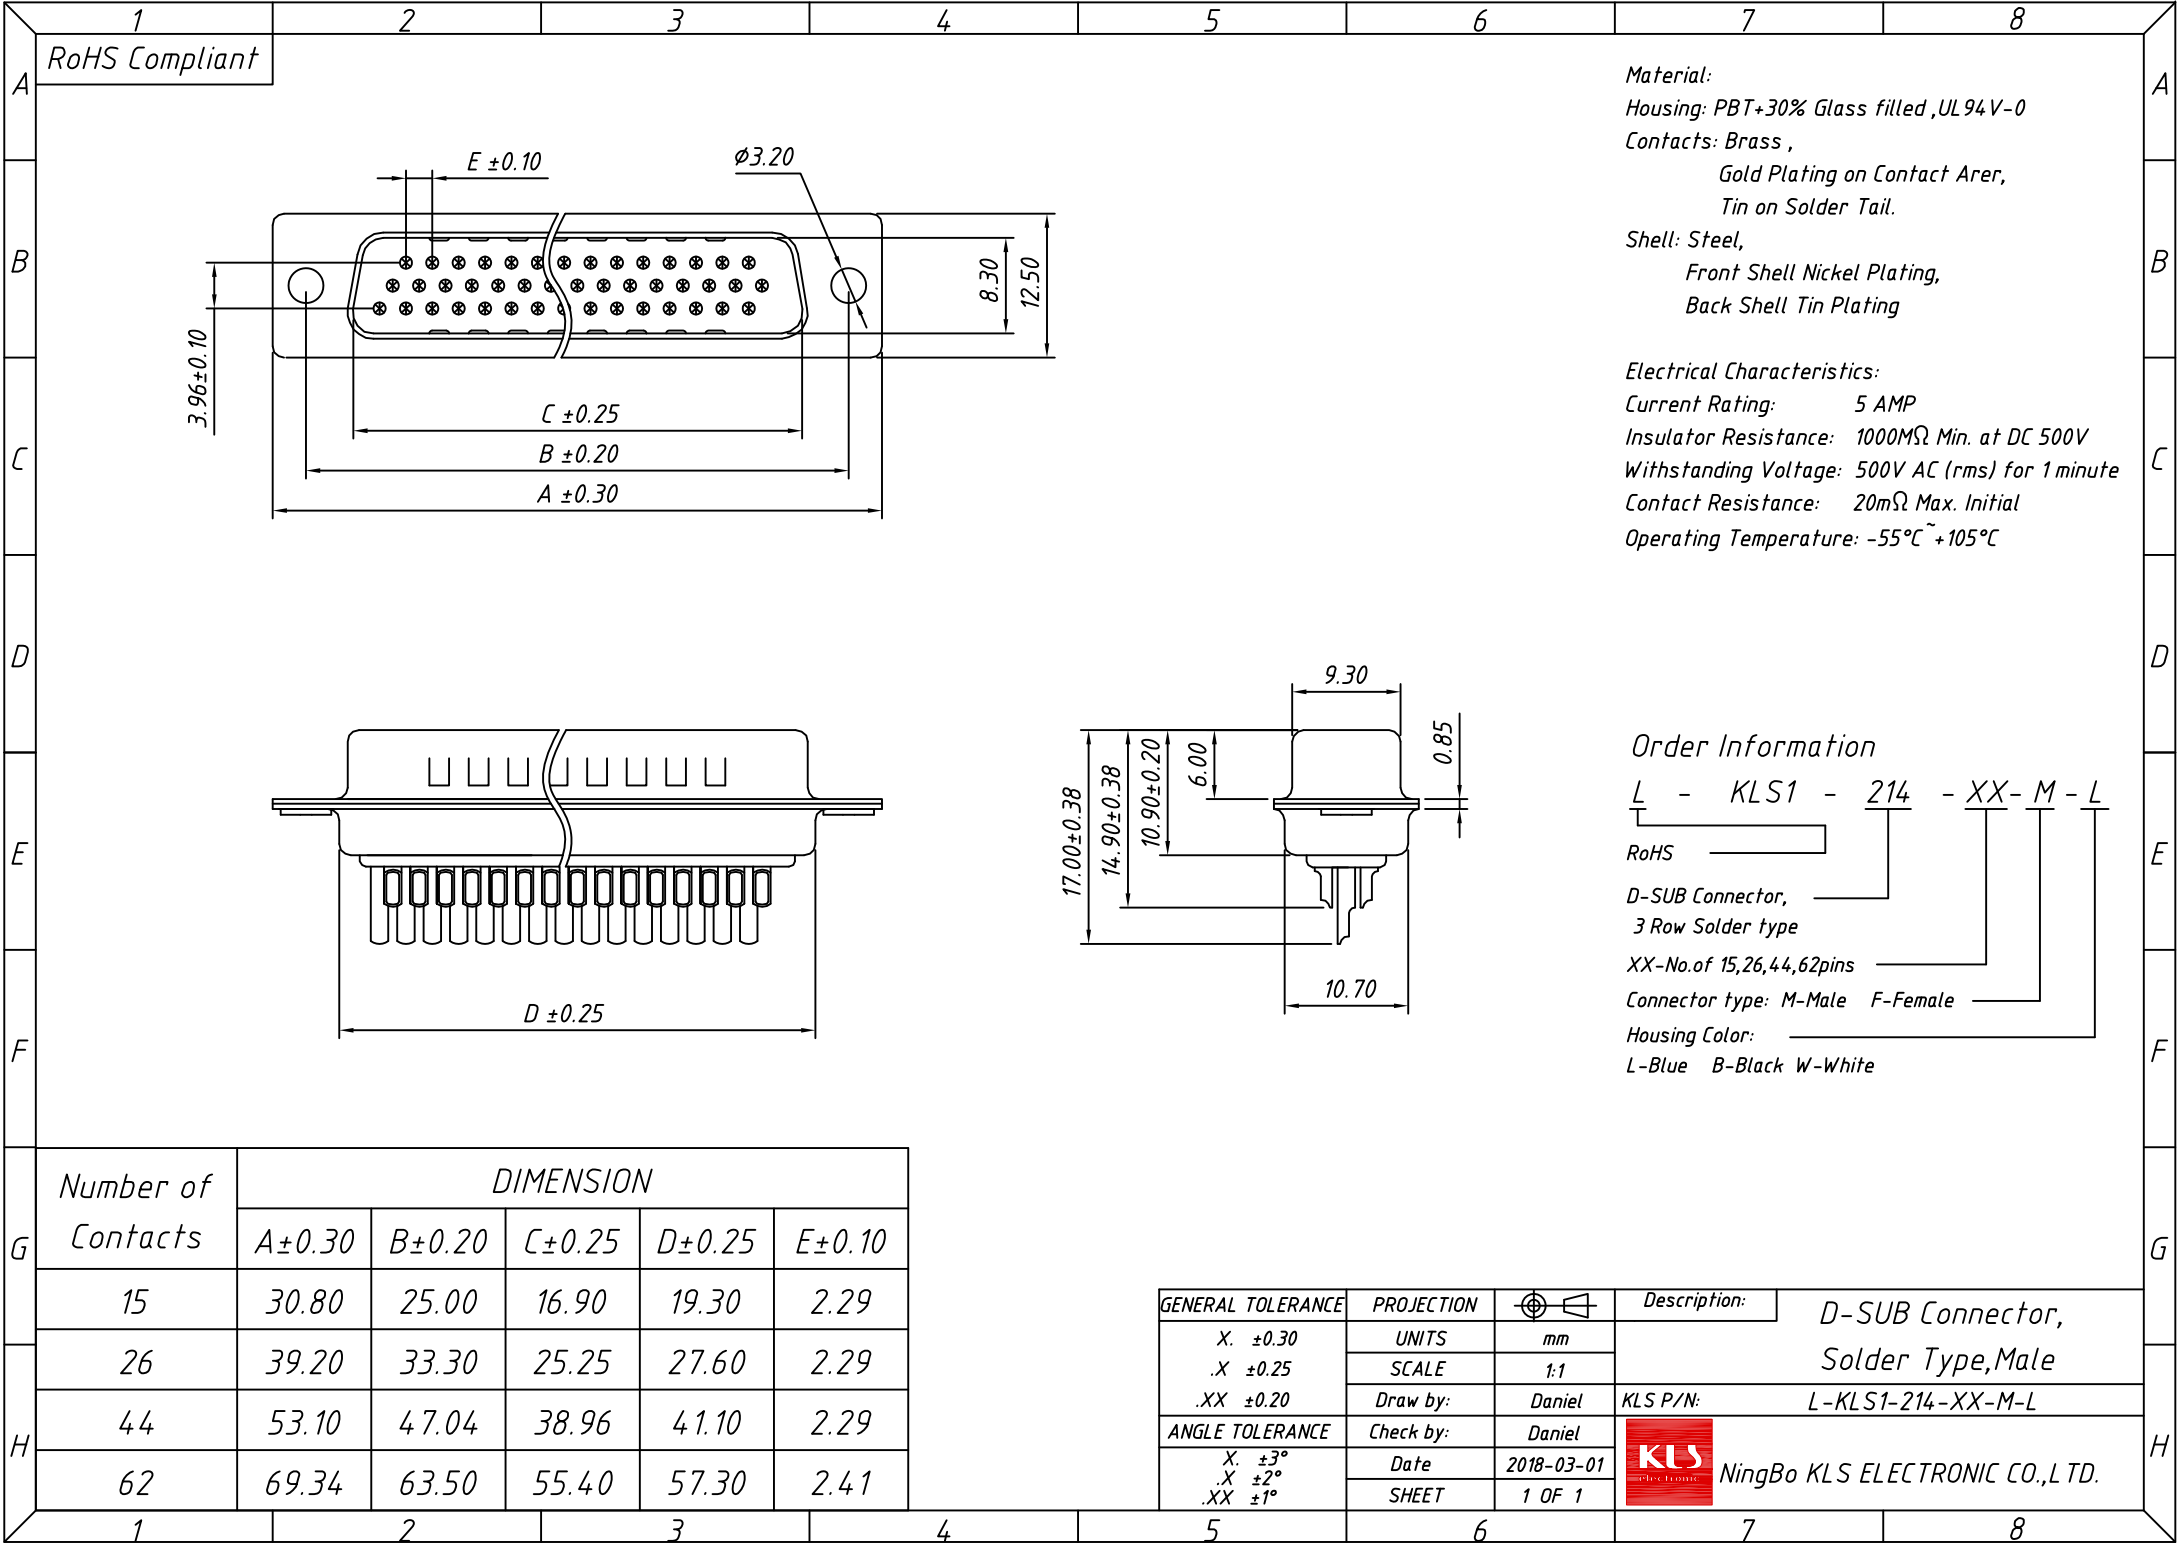

RoHS Compliant

Material:
Housing: PBT+30% Glass filled ,UL 94V-0
Contacts: Brass ,
Gold Plating on Contact Arer,
Tin on Solder Tail.
Shell: Steel,
Front Shell Nickel Plating,
Back Shell Tin Plating

Electrical Characteristics:
Current Rating: 5 AMP
Insulator Resistance: 1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) for 1 minute
Contact Resistance: 20mΩ Max. Initial
Operating Temperature: -55°C ~ +105°C

Order Information
L - KLS1 - 214 - XX - M - L
RoHS
D-SUB Connector,
3 Row Solder type
XX-No.of 15,26,44,62pins
Connector type: M-Male F-Female
Housing Color:
L-Blue B-Black W-White

Number of Contacts	DIMENSION				
	A±0.30	B±0.20	C±0.25	D±0.25	E±0.10
15	30.80	25.00	16.90	19.30	2.29
26	39.20	33.30	25.25	27.60	2.29
44	53.10	47.04	38.96	41.10	2.29
62	69.34	63.50	55.40	57.30	2.41

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.30	UNITS	mm	D-SUB Connector, Solder Type,Male
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Daniel	KLS P/N: L-KLS1-214-XX-M-L
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,L TD.
X. ±3°	Date	2018-03-01	
.X ±2°	SHEET	1 OF 1	
.XX ±1°			