
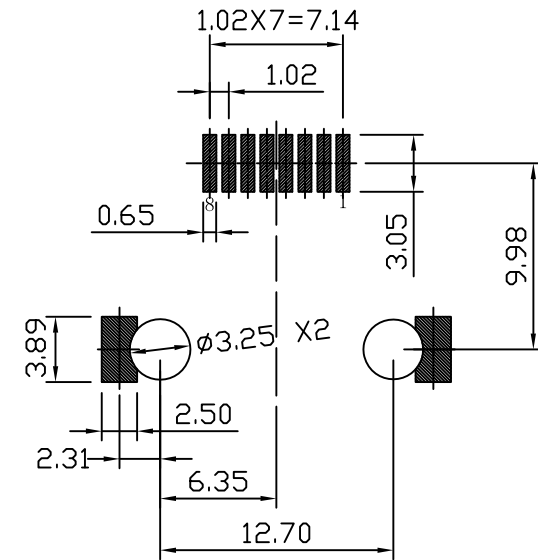
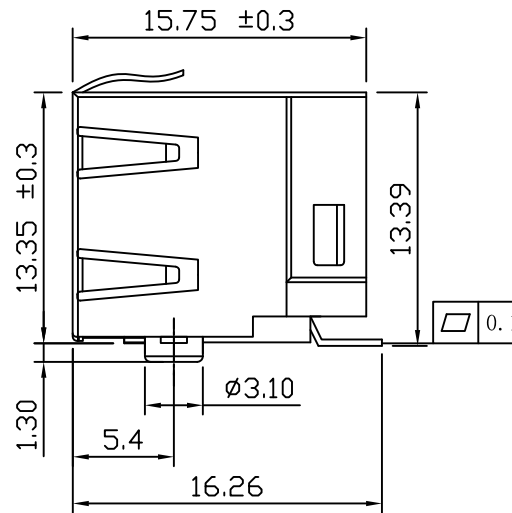



Mechanical:

REW.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2015-07-03	

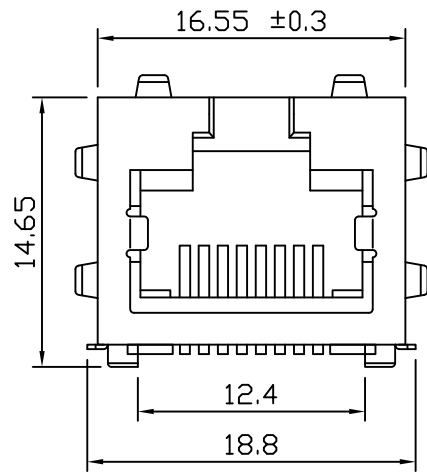

LPJES101-XCNL

Gold Plating	"X"
Gold Flash	0
1.5u"	1
3u"	2
6u"	3
15u"	4
30u"	5
50u"	6

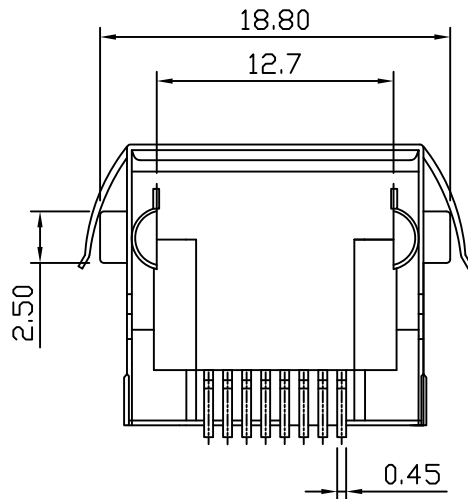

NOTES:

Electrical:

1. Voltage rating : 125 VAC RMS
2. Current Rating : 1.5 AMP
3. Contact resistance : 20 mΩ Max
4. Insulation resistance : 1000 MΩ Min @500V DC
5. Dielectric strength : 1000 VAC RMS 50Hz, 1MIN.

MECHANICAL:

1. Housing & Insert Material : LCP UL94V-0.
2. Contact Material : Phospor bronze T=0.30mm
3. Plating : Gold Plating OVER nickel,
Gold plated on contact area 50u"
4. Operating Life : 750 Cycles Min.

ENVIRONMENTAL:

1. Storage : -40℃ ~ +85℃
2. Operation : -40℃ ~ +85℃.
3. IR temperature : 260℃±5℃, 5~10 Sec.
4. UL Certification : File Number E484635.



X:X	±0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.25	CHKD:	TITLE: SMT RJ45 Connector CAT5	
X:XXX	±0.05	DR: TOM	PART NO.: LPJES101-6CNL	
ANGLES	±1°	UNIT: mm	SHEET: 1/1	
		SCALE: 1/1	REV: A	DWG NO.: LP15060965