


- Features :
- *3000VDC I/O isolation
- *Internal SMD technology
- *Built-in EMI filter
- *Protection: Short circuit
- *Cooling by free air convection
- *Non-conductive plastic case
- *Single in line package
- *100% full load burn-in test
- *Low cost / High reliability
- *2 years warranty



SPECIFICATION

| ORDER NO. | SPU02L-05 | SPU02M-05 | SPU02N-05 | SPU02L-12 | SPU02M-12 | SPU02N-12 | SPU02L-15 | SPU02M-15 | SPU02N-15 | | |
|---------------------------------|---|--|--|--------------|--------------|------------|--------------|--------------|------------|--------------|--------------|
| OUTPUT | DC OUTPUT VOLTAGE | | | 12V | | | 15V | | | | |
| | CURRENT RANGE | | | 33 ~ 167mA | | | 27 ~ 133mA | | | | |
| | EFFICIENCY (Typ.) | 77% | 79% | 77% | 80% | 81% | 80% | 81% | 83% | 82% | |
| | RATED POWER 2W | | | | | | | | | | |
| | RIPPLE & NOISE (max.) Note.2 100mVp-p | | | | | | | | | | |
| | LINE REGULATION Note.3 ±1.2% for 1% input variation | | | | | | | | | | |
| | LOAD REGULATION Note.4 ±8.0% | | | | | | | | | | |
| | VOLTAGE ACCURACY ±2.0% | | | | | | | | | | |
| SWITCHING FREQUENCY 100KHz min. | | | | | | | | | | | |
| INPUT | VOLTAGE RANGE | | 4.5 ~ 5.5V | 10.8 ~ 13.2V | 21.6 ~ 26.4V | 4.5 ~ 5.5V | 10.8 ~ 13.2V | 21.6 ~ 26.4V | 4.5 ~ 5.5V | 10.8 ~ 13.2V | 21.6 ~ 26.4V |
| | NORMAL VOLTAGE | | 5V | 12V | 24V | 5V | 12V | 24V | 5V | 12V | 24V |
| | INPUT CURRENT | Full load | 520mA | 214mA | 107mA | 520mA | 214mA | 107mA | 520mA | 214mA | 107mA |
| | | No load | 60mA | 20mA | 15mA | 60mA | 20mA | 15mA | 60mA | 20mA | 15mA |
| | FILTER | | Capacitor type | | | | | | | | |
| PROTECTION | | Fuse recommended | | | | | | | | | |
| PROTECTION | OVERLOAD | | Momentary Protection type : Broken | | | | | | | | |
| | SHORT CIRCUIT | | Momentary Protection type : Broken | | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | | -40 ~ +71°C (Refer to "Derating Curve") | | | | | | | | |
| | WORKING HUMIDITY | | 20% ~ 90% RH non-condensing | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | | -40 ~ +105°C, 10 ~ 95% RH | | | | | | | | |
| | TEMP. COEFFICIENT | | ±0.03%/°C (0 ~ 50°C) | | | | | | | | |
| VIBRATION | | 10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes | | | | | | | | | |
| SAFETY & EMC | WITHSTAND VOLTAGE | | I/P-O/P:3KVDC | | | | | | | | |
| | ISOLATION RESISTANCE | | I/P-O/P: 100M Ohms / 500VDC / 25°C/ 70% RH | | | | | | | | |
| | ISOLATION CAPACITANCE | | 80pF max. | | | | | | | | |
| | EMC EMISSION | | Compliance to EN55032 Class B, FCC part 15 Class B | | | | | | | | |
| EMC IMMUNITY | | Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A | | | | | | | | | |
| OTHERS | MTBF | | 700khrs min. MIL-HDBK-217F(25°C) | | | | | | | | |
| | DIMENSION | | 19.6*7.1*10.2mm or 0.77**0.28**0.40" inch (L*W*H) | | | | | | | | |
| | WEIGHT | | 2.3g | | | | | | | | |


Mechanical Specification

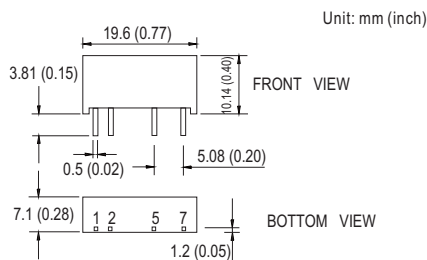

Pin Configuration

| Pin No. | Output |
|---------|--------|
| 1 | +Vin |
| 2 | -Vin |
| 5 | -Vout |
| 7 | +Vout |

Derating Curve

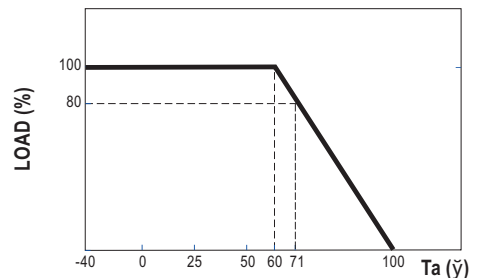

NOTE

1. All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 20% to 100% rated load.