


1W, Fixed input voltage , 4200VAC or 6000VDC isolated & unregulated positive-negative dual/single output

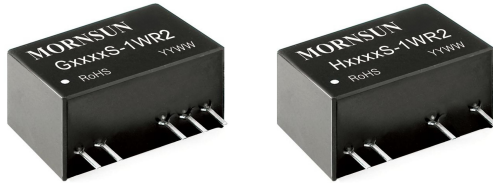

FEATURES

- SIP package
- High efficiency up to 81%
- Reinforced insulation
- The patient leakage current: Max 2μA
- Isolation voltage: 4200VAC or 6000VDC
- Operating temperature range:-40℃ to +85℃
- Internal surface mounted design
- International standard pin-out
- Meets IEC60950,EN60601-1, ANSI/AAMI ES60601-1approval (1xMOPP/2xMOOP)

G_S-1WR2 & H_S-1WR2 series meet reinforced insulation requirements. They are specially designed for applications where require compact size, high isolation, low isolation capacitor and low leakage current power. They are widely used in medical, electricity, IGBT driver and so on. They are suitable for:

- 1.Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%V_{in}$);
- 2.Where isolation is necessary between input and output (isolation voltage $\leq 4200VAC$ or $6000VDC$);
- 3.Where do not has high requirement of line regulation and the ripple & noise of the output voltage;
Such as: Medical collection and isolation, High voltage collection circuit, IGBT-driven circuits, etc.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Efficiency (%,Min./Typ.) @ Full Load	Max. Capacitive Load* (μF)
		Nominal (Range)	Output Voltage(VDC)	Output Current (mA)(Max./Min.)		
—	H0305S-1WR2	3.3 (2.97-3.63)	5	200/20	67/71	1000
CE	G0505S-1WR2	5 (4.5-5.5)	±5	±100/±10	74/78	470
	G0509S-1WR2		±9	±56/±6	76/80	470
	G0512S-1WR2		±12	±42/±5	70/74	220
	G0515S-1WR2		±15	±34/±4	72/76	220
CE/CB	H0503S-1WR2	5 (4.5-5.5)	3.3	303/31	69/73	1000
	H0505S-1WR2		5	200/20	74/78	1000
	H0512S-1WR2		12	84/9	72/76	470
	H0515S-1WR2		15	67/7	72/76	470
CE	G1205S-1WR2	12 (10.8-13.2)	±5	±100/±10	73/77	470
	G1209S-1WR2		±9	±56/±6	76/80	470
	G1212S-1WR2		±12	±42/±5	69/73	220
	G1215S-1WR2		±15	±34/±4	71/75	220
CE/CB	H1205S-1WR2	12 (10.8-13.2)	5	200/20	73/77	1000
	H1212S-1WR2		12	84/9	77/81	470
	H1215S-1WR2		15	67/7	77/81	470
—	G1515S-1WR2	15 (13.5-16.5)	±15	±34/±4	68/72	220
CE	G2405S-1WR2	24 (21.6-26.4)	±5	±100/±10	71/75	470
	G2409S-1WR2		±9	±56/±6	75/79	470
	G2412S-1WR2		±12	±42/±5	72/76	220
	G2415S-1WR2		±15	±34/±4	72/76	220
CE/CB	H2405S-1WR2	24 (21.6-26.4)	5	200/20	72/76	1000
	H2412S-1WR2		12	84/9	74/78	470
	H2415S-1WR2		15	67/7	74/78	470

Note:* The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (no-load/full load)	3.3V input	--	45/426	70/--	mA
	5V input	--	35/274	60/--	
	12V input	--	15/114	40/--	
	15V input	--	18/93	40/--	
	24V input	--	10/56	25/--	
Surge Voltage (1sec. max.)	3.3V input	-0.7	--	7	VDC
	5V input	-0.7	--	9	
	12V input	-0.7	--	18	
	15V input	-0.7	--	21	
	24V input	-0.7	--	30	
Reflected Ripple Current*		--	0.2	--	A
Input Filter		Capacitor filter			
Hot Plug		Unavailable			

Note: *Reflected ripple current testing method please see DC-DC Converter Application Notes for specific operation.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		See tolerance envelope curve (Fig. 1)			
Line Regulation	Input voltage change: $\pm 1\%$	3.3V output	--	± 1.5	--
		Others	--	± 1.2	
Load Regulation	10%-100% load	3.3V/5V output	--	20	%
		Others	--	15	
Ripple & Noise*	20MHz bandwidth	3.3V output	--	80	mVp-p
		Others	--	70	
Temperature Coefficient	100% full load	--	± 0.02	--	%/°C
Output Short Circuit Protection**		--	--	3	s

Note: *Ripple and noise tested with "parallel cable" method, please see DC-DC Converter Application Notes for specific operation methods.

**Supply voltage must be discontinued at the end of short circuit duration which less than 3s.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, with the test time of 1 minute	4200	--	--	VAC
		6000	--	--	VDC
Patient Leakage Current	250VAC, 50/60Hz	--	--	2	μA
Insulation Resistance	Input-output, isolation voltage 500VDC	1000	--	--	M Ω
Isolation Capacitance	Input-output, 100KHz/0.1V	--	5	--	pF
Operating Temperature		-40	--	85	°C
Storage Temperature		-55	--	125	
Casing Temperature Rise	Ta=25°C	--	25	--	
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	300	
Storage Humidity	Non-condensing	--	--	95	%RH
Switching Frequency	100% load, nominal input voltage	--	100	--	KHz
MTBF	MIL-HDBK-217F@25°C	3500	--	--	K hours
Transformer Creepage		5	--	--	mm
Transformer Clearance		5	--	--	
PCB Creepage & Clearance		5.5	--	--	

Note: 1. Patient leakage current and reinforced insulation is based on a 250 VAC, 50/60 Hz system input voltage.

2. G_S-1WR2 & H_S-1WR2 series meets 1xMOPP/2xMOOP when system input voltage is with 250VAC, 50/60Hz.

Physical Specifications

Casing Material	Black flame-retardant and heat-resistant plastic (UL94 V-0)
Package Dimensions	19.50*9.80*12.50 mm
Weight	4.2g(Typ.)
Cooling Method	Free air convection

EMC Specifications

EMI	CE	EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 5 for recommended circuit)
	RE	EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 5 for recommended circuit)
EMS	ESD	EN60601-1-2(IEC/EN61000-4-2 Contact $\pm 8\text{KV}$ perf. Criteria B)

Product Characteristic Curve

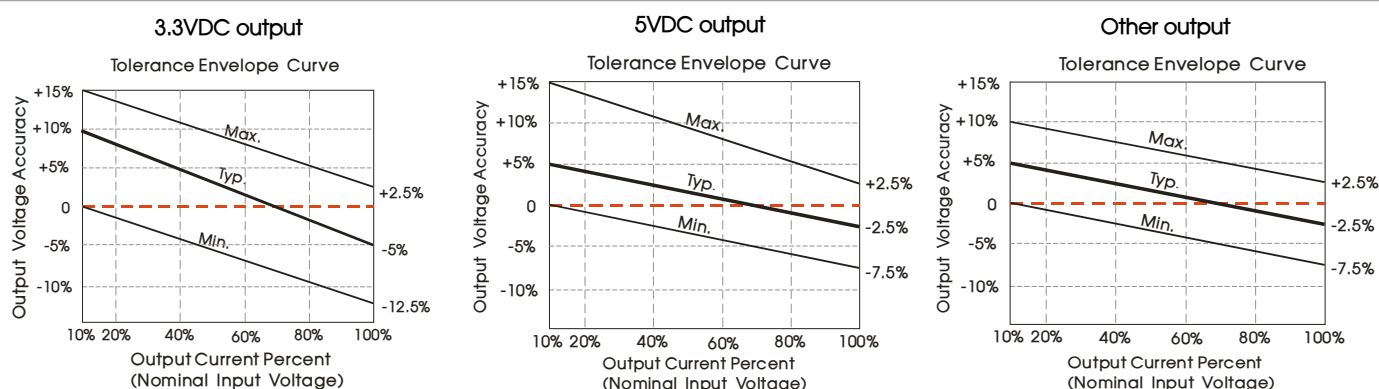


Fig. 1





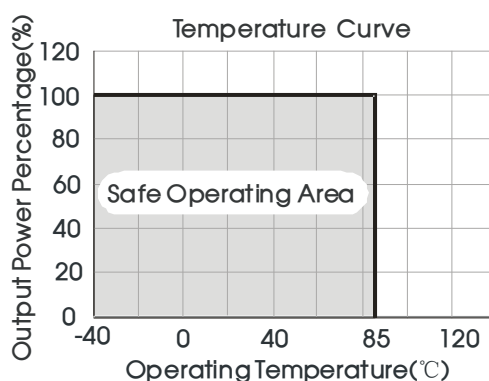


Fig. 2

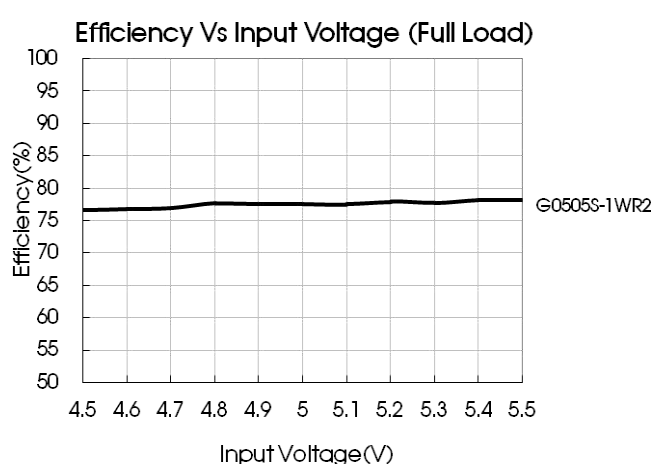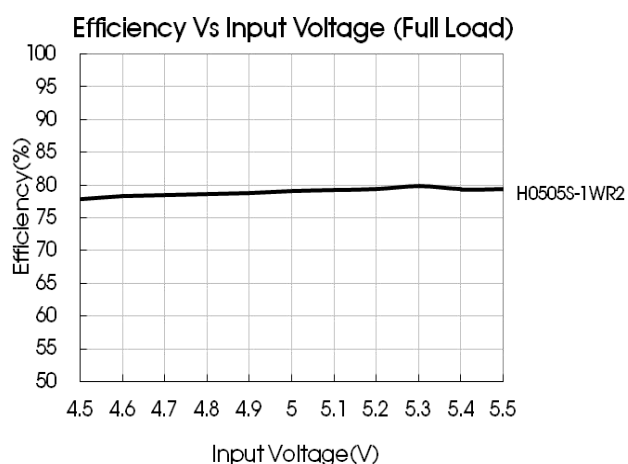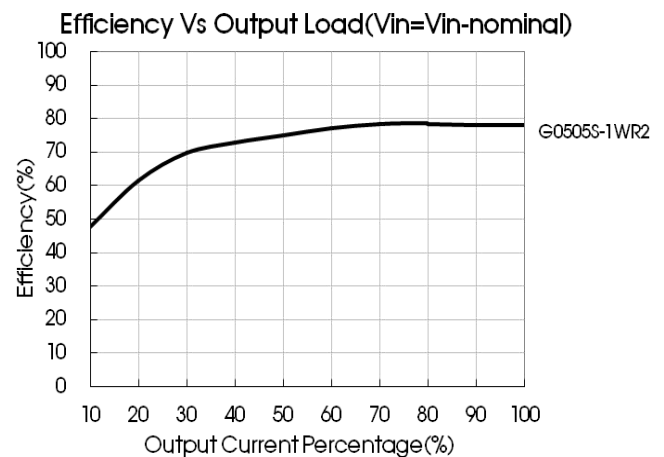

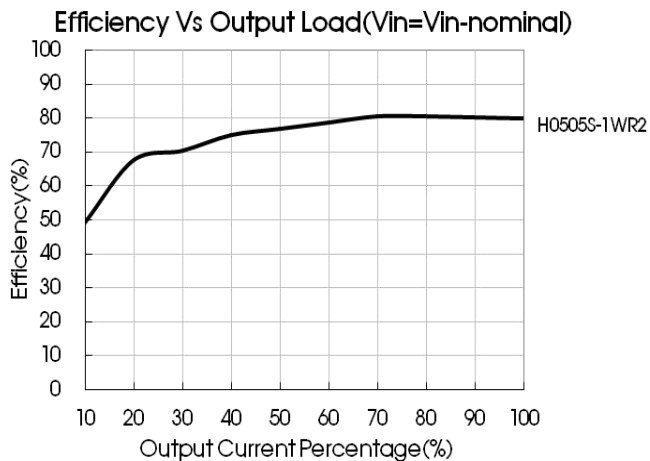

Design Reference

1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.3. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1. The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (see Fig. 4).

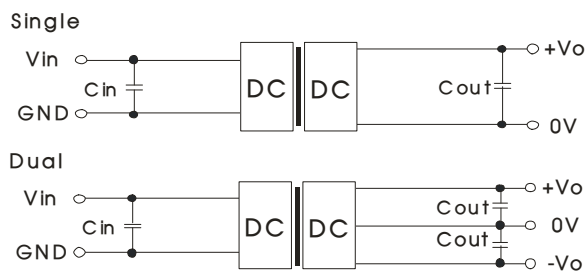


Fig. 3

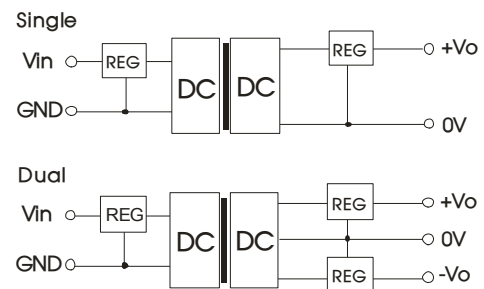


Fig. 4

Recommended capacitive load value table (Table 1)

Vin (VDC)	Cin (μF)	Single Vout (VDC)	Cout (μF)	Dual Vout (VDC)	Cout (μF)
3.3/5	10	3.3/5	10	±5	4.7
12/15	4.7	12	2.2	±9	2.2
24	2.2	15	1	±12/±15	1

2. EMC typical recommended circuit (CLASS B)

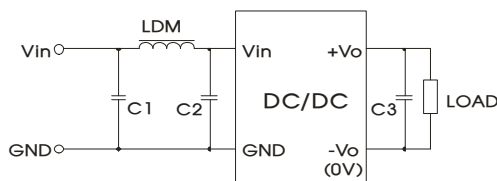


Fig. 5

Recommended typical circuit parameters:


EMI	Input voltage (V)	3.3/5/12/15/24
	C1,C2	4.7μF /50V
	C3	Refer to the Cout in Fig.3
	LDM	6.8μH

3. Output load requirements


In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 10% rated load when it is used. If the needed power is indeed small, please parallel a resistor on the output side (The sum of the efficient power and resistor consumption power is not less than 10%).

4. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

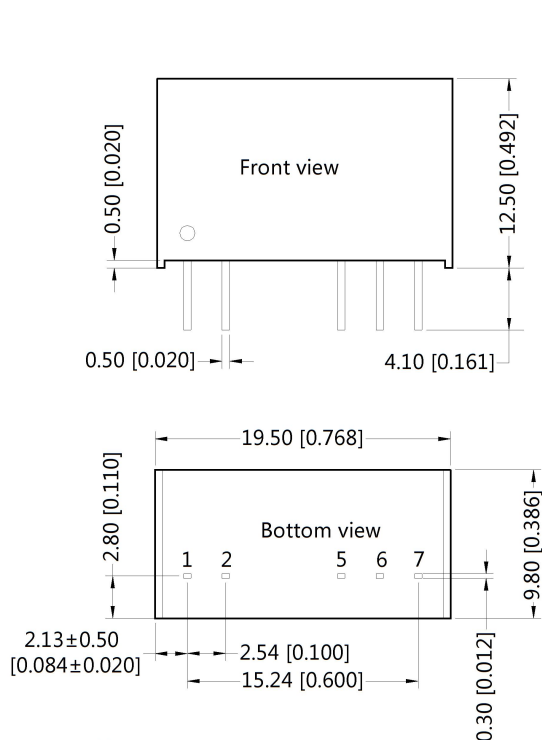

Note:
Unit :mm[inch]
Pin section tolerances:±0.10[±0.004]
General tolerances:±0.25[±0.010]

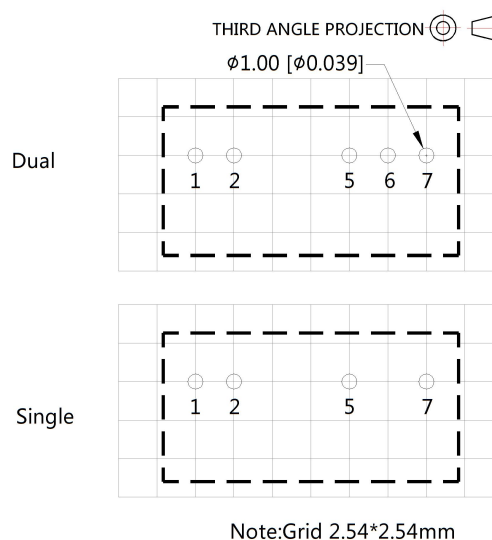

Pin-Out		
Pin	Single	Dual
1	Vin	Vin
2	GND	GND
5	0V	-Vo
6	No Pin	0V
7	+Vo	+Vo

Note:

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Packing bag number: 58200013;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our Company's corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China
Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com