

1W, Fixed input voltage, 5000VAC or 6000VDC isolated & unregulated dual/single output



Patent Protection



FEATURES

- High efficiency up to 83%
- The leakage current < 2μA
- Isolation Capacitance as low as 4pF
- Creepage & Clearance Distance > 5mm
- Reinforced insulation, Isolation voltage: 5000VAC or 6000VDC
- Operating ambient temperature range: -40°C to +105°C
- Continuous short-circuit protection
- Meet IEC60601 standard

G_S-1WR3 & H_S-1WR3 series meet reinforced insulation requirements. They are specially designed for applications where require compact size, high isolation, low isolation capacitor and low leakage current power. They are widely used in medical, electricity, IGBT driver and so on. They are suitable for:

1. Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%V_{in}$);
 2. Where isolation is necessary between input and output (isolation voltage $\leq 5000VAC$ or $6000VDC$);
 3. Where do not has high requirement of line regulation and the ripple & noise of the output voltage;
- Such as, medical collection isolation, high voltage collection circuit and IGBT drive circuit.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF)* Max.
		Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
--	G0503S-1WR3	5 (4.5-5.5)	±3.3	±152/±15	71/75	1000
	G0505S-1WR3		±5	±100/±10	76/80	1000
	G0509S-1WR3		±9	±56/±6	76/80	470
	G0512S-1WR3		±12	±42/±5	77/81	220
	G0515S-1WR3		±15	±34/±4	77/81	220
	H0503S-1WR3		3.3	303/31	71/75	2200
	H0505S-1WR3		5	200/20	76/80	2200
	H0509S-1WR3		9	111/11	76/80	1000
	H0512S-1WR3		12	84/9	77/81	470
	H0515S-1WR3		15	67/7	77/81	470
	H0524S-1WR3		24	42/4	77/81	220
UL/EN/BS EN	G1205S-1WR3	12 (10.8-13.2)	±5	±100/±10	75/79	1000
	G1209S-1WR3		±9	±56/±6	75/79	470
	G1212S-1WR3		±12	±42/±5	77/81	200
	G1215S-1WR3		±15	±34/±4	77/81	200
	H1203S-1WR3		3.3	303/31	72/76	2200
	H1205S-1WR3		5	200/20	75/79	2200
	H1209S-1WR3		9	111/12	77/81	680
	H1212S-1WR3		12	84/9	79/83	470
	H1215S-1WR3		15	67/7	79/83	470
	H1224S-1WR3		24	42/4	78/82	220

UL/EN/BS EN	G1505S-1WR3	15 (13.5-16.5)	±5	±100/±10	73/77	1000
	G1512S-1WR3		±12	±42/±5	75/79	220
	G1515S-1WR3		±15	±33/±4	75/79	220
	G2405S-1WR3	24 (21.6-26.4)	±5	±100/±10	71/75	1000
	G2409S-1WR3		±9	±56/±6	71/75	470
	G2412S-1WR3		±12	±42/±5	72/76	220
	G2415S-1WR3		±15	±34/±4	72/76	220
	H2405S-1WR3		5	200/20	72/76	2200
	H2409S-1WR3		9	111/12	72/76	680
	H2412S-1WR3		12	84/9	72/76	470
	H2415S-1WR3		15	67/7	72/76	470
	H2424S-1WR3		24	42/4	72/76	220

Note: * The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load/no-load)	5V input	--	250/14	282/--	mA
	12V input	--	106/10	116/--	
	15V input	--	90/10	100/--	
	24V input	--	56/12	59/--	
Surge Voltage (1sec. max.)	5V input	-0.7	--	9	VDC
	12V input	-0.7	--	18	
	15V input	-0.7	--	21	
	24V input	-0.7	--	30	
Reflected Ripple Current*		--	200	--	mA
Input Filter		Capacitance filter			
Hot Plug		Unavailable			

Note: * Refer to DC-DC Converter Application notes for detailed description of reflected ripple current test method.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			See output regulation curve(Fig. 1)			
Linear Regulation	Input voltage change: ±1%	3.3V output	--	--	1.5	--
		Other output	--	--	1.2	
Load Regulation	10%-100% load	3.3V/5V output	--	--	20	%
		Other output	--	--	15	
Ripple & Noise*	20MHz bandwidth	3.3V output	--	100	150	mVp-p
		Other output	--	80	120	
Temperature Coefficient	100% full load		--	±0.02	--	%/℃
Output Short Circuit Protection			Continuous, self-recovery			

Note: *The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output, with the test time of 1 minute, the leakage current < 1mA	5000	--	--	VAC
		6000	--	--	VDC
Patient Leakage Current*	250VAC, 50/60Hz	--	--	2	μA
Insulation Resistance	Input-output, isolation voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100kHz/0.1V	--	4	--	pF

Operating Temperature	Derating when operating temperature $\geq 85^{\circ}\text{C}$ (see Fig. 2)	-40	--	105	$^{\circ}\text{C}$
Storage Temperature		-55	--	125	
Case Temperature Rise	$T_a=25^{\circ}\text{C}$	--	25	--	
Pin Soldering Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	300	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency	5V input, 100% load	--	300	--	kHz
	12/15/24V input, 100% load	--	200	--	
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$	19360	--	--	k hours
Creepage & Clearance Distance		5	--	--	mm

Note: * Leakage current and reinforced insulation is based on 250 VAC, 50/60 Hz system input voltage.


Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	19.50 x 9.80 x 12.50 mm
Weight	4.0g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	H0515S-1WR3 H0524S-1WR3 G0515S-1WR3	CISPR32/EN55032 CLASS A (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS A (see Fig. 4 for recommended circuit)
		Other Part No.	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 4 for recommended circuit)
	RE	H0515S-1WR3 H0524S-1WR3 G0515S-1WR3	CISPR32/EN55032 CLASS A (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS A (see Fig. 4 for recommended circuit)
		Other Part No.	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 4 for recommended circuit)
Immunity	ESD		EN60601-1-2 (IEC/EN61000-4-2) Air $\pm 15\text{kV}$, Contact $\pm 8\text{kV}$ perf. Criteria B

Typical Characteristic Curves

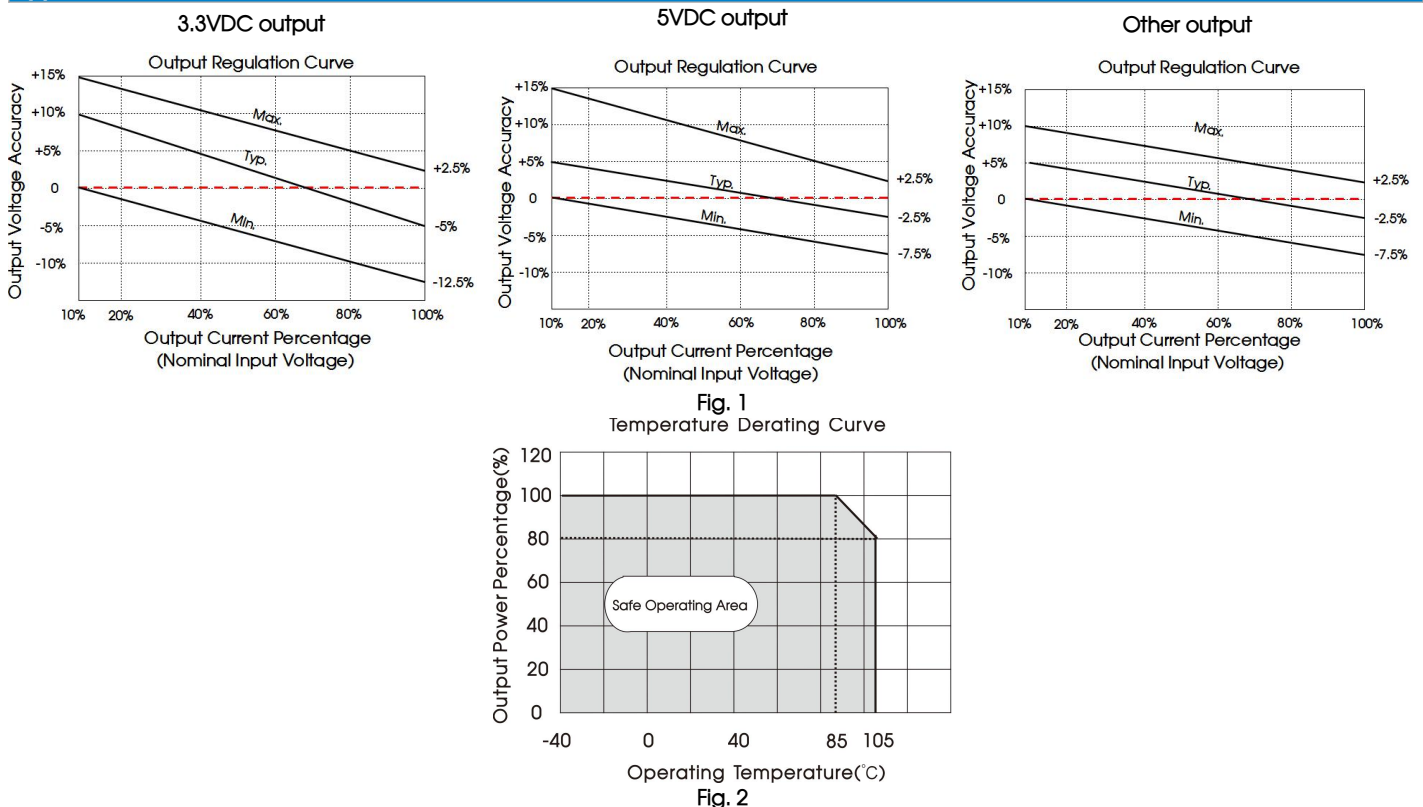

Design Reference

1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.3. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1.

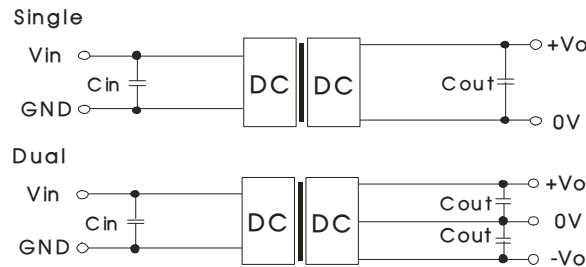



Fig. 3

Table 1: Recommended input and output capacitor values

Vin	Cin	Single Vout	Cout	Dual Vout	Cout
5VDC	10μF/10V	3.3/5VDC	10μF/16V	±3.3VDC	4.7μF/16V
12VDC	10μF/25V	9VDC	10μF/16V	±5/±9VDC	4.7μF/16V
15VDC	1μF/25V	12VDC	2.2μF/25V	±12/±15VDC	1μF/25V
24VDC	2.2μF/50V	15VDC	1μF/25V	±24VDC	0.47μF/50V
--	--	24VDC	0.47μF/50V	--	--

2. EMC (CLASS B) compliance circuit


5V input

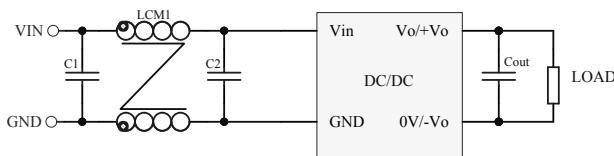

EMC recommended circuit value table (Table 2)

Series	H05_S-1WR3	G05_S-1WR3
C1/C2	4.7μF /16V	22μF /16V
Cout	Refer to the Cout in table 1	
LCM1	22μH (Nickel zinc inductance)	

12V/15V input

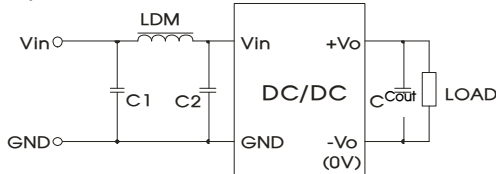

Input voltage	12/15 VDC
C1/C2	4.7μF /25V
Cout	Refer to the Cout in table 1
LDM	22μH

24V input

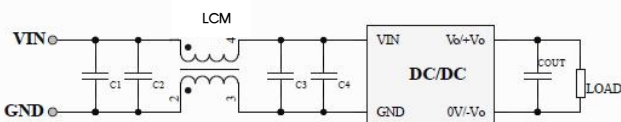


图 4


Input voltage	24 VDC
C1/C2	4.7μF /50V
C3	G24_S-1WR3 100μF /50V
Other output	4.7μF /50V
C4	G24_S-1WR3 --
Other output	4.7μF /50V
COUT	Refer to the Cout in table 1
LCM	22μH (Nickel zinc inductance)

3. Minimum Output Load Requirement


For a reliable and efficient operation of the converter, the minimum load should never be less than 10% of the rated output load. If the total required output power is below 10%, a parallel bleeding resistor is required on the output, ensuring that the sum of the power consumption is always maintained at 10% minimum.

4. For additional information, please refer to DC-DC converter application notes on www.mornsun-power.com


Dimensions and Recommended Layout

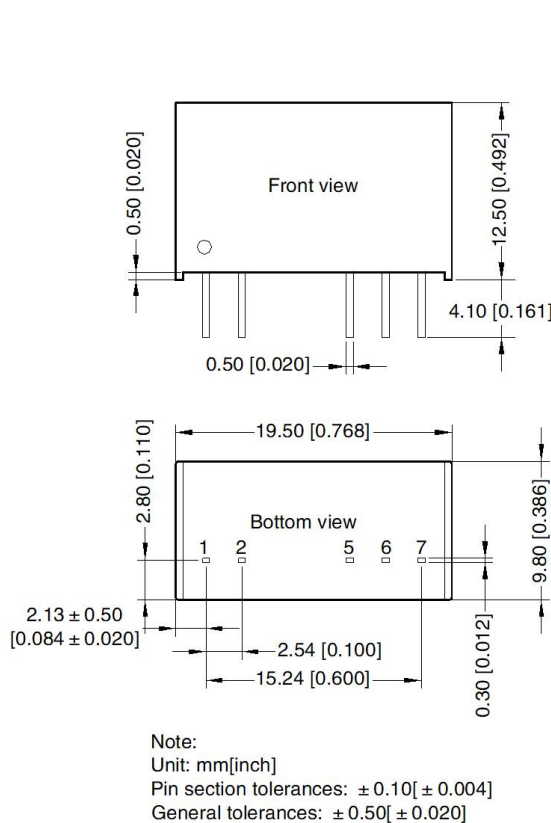

Dual

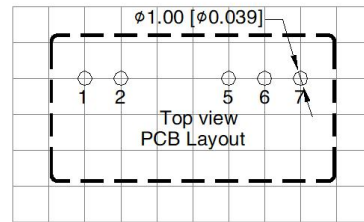

Single

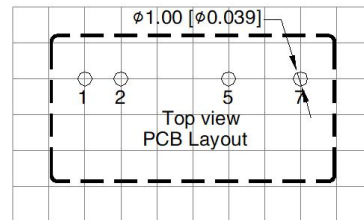

Note: Grid 2.54*2.54mm

Pin-Out		
Pin	Single	Dual
1	Vin	Vin
2	GND	GND
5	0V	-Vo
6	No Pin	0V
7	+Vo	+Vo

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200013;
- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com