


2W isolated DC-DC converter with 4.2k VAC/6k VDC  
Fixed input voltage and unregulated single or dual  
output



Patent Protection

RoHS

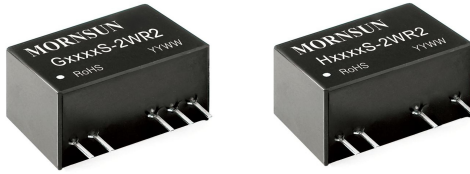

### FEATURES

- SIP package
- High efficiency up to 84%
- Reinforced insulation
- Patient leakage current 2μA max.
- I/O isolation test voltage 4.2k VAC or 6k VDC
- Operating ambient temperature: -40℃ to +85℃
- Internal surface mounted design
- Industry standard pin-out
- EN60601-1, ANSI/AAMI ES60601-1 approved (1xMOPP/2xMOOP)

*G\_S-2WR2 & H\_S-2WR2 series meets reinforced insulation requirements. They are especially designed for applications where extremely high isolation, low insulation capacitor with low leakage current in a compact package size is required. They are widely used in applications such as medical, electrical grid, IGBT driver circuits and similar where:*

1. The voltage of the input power supply is relatively stable with a variation of  $\pm 10\%$  Vin or less;
2. An extremely high input to output isolation voltage of up to 4200VAC or 6000VDC is required;
3. The requirement for ripple & noise or a tight output regulation is not as strict.

### Selection Guide

| Certification | Part No.    | Input Voltage (VDC) | Output       |                           | Full Load Efficiency (%)<br>Min./Typ. | Max. Capacitive Load*<br>(μF) |
|---------------|-------------|---------------------|--------------|---------------------------|---------------------------------------|-------------------------------|
|               |             | Nominal (Range)     | Voltage(VDC) | Current (mA)<br>Max./Min. |                                       |                               |
| CE            | G0505S-2WR2 | 5<br>(4.5-5.5)      | ±5           | ±200/±20                  | 74/78                                 | 470                           |
|               | G0509S-2WR2 |                     | ±9           | ±111/±12                  | 74/78                                 | 470                           |
|               | G0512S-2WR2 |                     | ±12          | ±83/±9                    | 74/78                                 | 220                           |
|               | G0515S-2WR2 |                     | ±15          | ±67/±7                    | 76/80                                 | 220                           |
|               | H0505S-2WR2 |                     | 5            | 400/40                    | 73/77                                 | 1000                          |
|               | H0512S-2WR2 |                     | 12           | 167/17                    | 75/79                                 | 470                           |
|               | H0515S-2WR2 |                     | 15           | 133/14                    | 75/79                                 | 470                           |
|               | G1205S-2WR2 | 12<br>(10.8-13.2)   | ±5           | ±200/±20                  | 70/74                                 | 470                           |
|               | G1209S-2WR2 |                     | ±9           | ±111/±12                  | 76/80                                 | 470                           |
|               | G1212S-2WR2 |                     | ±12          | ±83/±9                    | 76/80                                 | 220                           |
|               | G1215S-2WR2 |                     | ±15          | ±67/±7                    | 73/77                                 | 220                           |
|               | H1205S-2WR2 |                     | 5            | 400/40                    | 72/76                                 | 1000                          |
|               | H1212S-2WR2 |                     | 12           | 167/17                    | 75/79                                 | 470                           |
|               | H1215S-2WR2 |                     | 15           | 133/14                    | 77/81                                 | 470                           |
| --            | G1505S-2WR2 | 15<br>(13.5-16.5)   | ±5           | ±200/±20                  | 73/77                                 | 470                           |
|               | G1509S-2WR2 |                     | ±9           | ±111/±12                  | 76/80                                 | 470                           |
|               | G1515S-2WR2 |                     | ±15          | ±67/±7                    | 69/73                                 | 220                           |
|               | H1505S-2WR2 |                     | 5            | 400/40                    | 73/77                                 | 1000                          |
| --            | H1515S-2WR2 |                     | 15           | 133/14                    | 78/82                                 | 470                           |
| CE            | G2405S-2WR2 | 24<br>(21.6-26.4)   | ±5           | ±200/±20                  | 75/79                                 | 470                           |
|               | G2409S-2WR2 |                     | ±9           | ±111/±12                  | 77/81                                 | 470                           |
|               | G2412S-2WR2 |                     | ±12          | ±83/±9                    | 78/82                                 | 220                           |
|               | G2415S-2WR2 |                     | ±15          | ±67/±7                    | 77/81                                 | 220                           |
|               | H2405S-2WR2 |                     | 5            | 400/40                    | 75/79                                 | 1000                          |
|               | H2412S-2WR2 |                     | 12           | 167/17                    | 78/82                                 | 470                           |
|               | H2415S-2WR2 |                     | 15           | 133/14                    | 80/84                                 | 470                           |

Note:\* The specified maximum capacitive load value for positive and negative output is identical.

## Input Specifications

| Item                              | Operating Conditions | Min.               | Typ.   | Max.  | Unit |
|-----------------------------------|----------------------|--------------------|--------|-------|------|
| Input Current (no-load/full load) | 5V input             | --                 | 35/520 | 80/-- | mA   |
|                                   | 12V input            | --                 | 15/217 | 40/-- |      |
|                                   | 15V input            | --                 | 18/171 | 40/-- |      |
|                                   | 24V input            | --                 | 10/106 | 25/-- |      |
| Surge Voltage (1sec. max.)        | 5V input             | -0.7               | --     | 9     | VDC  |
|                                   | 12V input            | -0.7               | --     | 18    |      |
|                                   | 15V input            | -0.7               | --     | 21    |      |
|                                   | 24V input            | -0.7               | --     | 30    |      |
| Reflected Ripple Current*         |                      | --                 | 0.2    | --    | A    |
| Input Filter                      |                      | Capacitance filter |        |       |      |
| Hot Plug                          |                      | Unavailable        |        |       |      |

Note: \* Please refer to DC-DC Converter Application Note for detailed description of Reflected ripple current testing method.

## Output Specifications

| Item                                  | Operating Conditions            | Min.                                       | Typ.       | Max.      | Unit  |
|---------------------------------------|---------------------------------|--------------------------------------------|------------|-----------|-------|
| Voltage Accuracy <sup>①</sup>         |                                 | See Typical Characteristic Curves (Fig. 1) |            |           |       |
| Linear Regulation                     | Input voltage change: $\pm 1\%$ | --                                         | --         | $\pm 1.2$ | --    |
| Load Regulation                       | 10%-100% load                   | 5VDC output                                | --         | 20        | %     |
|                                       |                                 | 9VDC output                                | --         | 15        |       |
|                                       |                                 | 12VDC output                               | --         | 15        |       |
|                                       |                                 | 15VDC output                               | --         | 15        |       |
| Ripple & Noise <sup>②</sup>           | 20MHz bandwidth                 | --                                         | 100        | 150       | mVp-p |
| Temperature Coefficient               | 100% full load                  | --                                         | $\pm 0.02$ | --        | %/°C  |
| Short-circuit Protection <sup>③</sup> |                                 | --                                         | --         | 3         | s     |

Note: ① Output voltage accuracy of G1515S-2WR2 with 10% load, Min. -5%;  
 ② The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information;  
 ③ At the end of the short circuit duration, the supply voltage must be disconnected from the modules.

## General Specifications

| Item                                      | Operating Conditions                                  | Min. | Typ. | Max. | Unit    |
|-------------------------------------------|-------------------------------------------------------|------|------|------|---------|
| Isolation                                 | Input-output Electric strength test for 1 minute      | 4200 | --   | --   | VAC     |
|                                           |                                                       | 6000 | --   | --   | VDC     |
| Patient Leakage Current                   | 250VAC, 50/60Hz                                       | --   | --   | 2    | μA      |
| Insulation Resistance                     | Input-output resistance at 500VDC                     | 1000 | --   | --   | MΩ      |
| Isolation Capacitance                     | Input-output capacitance at 100kHz/0.1V               | --   | 5    | --   | pF      |
| Operating Temperature                     |                                                       | -40  | --   | 85   | °C      |
| Storage Temperature                       |                                                       | -55  | --   | 125  |         |
| Case Temperature Rise                     | Ta=25°C                                               | --   | 25   | --   |         |
| Pin Soldering Resistance Temperature      | Soldering spot is 1.5mm away from case for 10 seconds | --   | --   | 300  |         |
| Storage Humidity                          | Non-condensing                                        | --   | --   | 95   | %RH     |
| Switching Frequency                       | 100% load, nominal input voltage                      | --   | 100  | --   | kHz     |
| MTBF                                      | MIL-HDBK-217F @ 25°C                                  | 3500 | --   | --   | k hours |
| Transformer Creepage & Clearance Distance |                                                       | 5    | --   | --   | mm      |
| PCB Creepage & Clearance Distance         |                                                       | 5.5  | --   | --   |         |

Note: ① Patient leakage current and reinforced insulation is based on a 250 VAC, 50/60 Hz system input voltage;  
 ② G\_S-2WR2 & H\_S-2WR2 series meets 1xMOPP/2xMOOP when system input voltage is 250VAC, 50/60Hz.

### Mechanical Specifications

|                |                                                              |
|----------------|--------------------------------------------------------------|
| Case Material  | Black plastic; flame-retardant and heat-resistant (UL94 V-0) |
| Dimensions     | 19.50 x 9.80 x 12.50 mm                                      |
| Weight         | 4.2g (Typ.)                                                  |
| Cooling Method | Free air convection                                          |

### Electromagnetic Compatibility (EMC)

|           |     |                                                                             |
|-----------|-----|-----------------------------------------------------------------------------|
| Emissions | CE  | EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 5 for recommended circuit)    |
|           | RE  | EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 5 for recommended circuit)    |
| Immunity  | ESD | EN60601-1-2/IEC/EN61000-4-2 Contact $\pm 8\text{kV}$ performance Criteria B |

### Typical Characteristic Curves

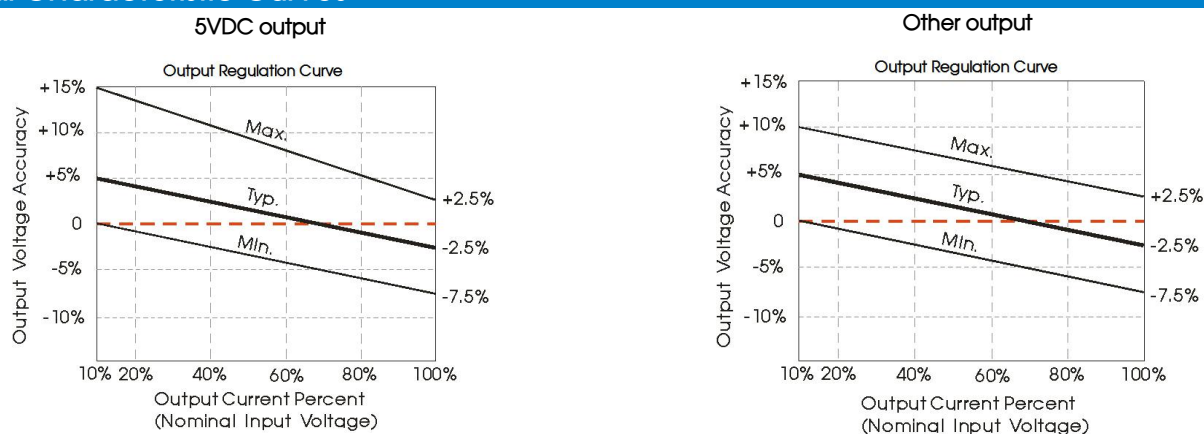


Fig. 1





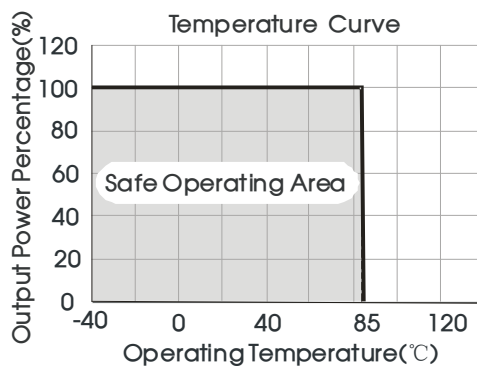


Fig. 2

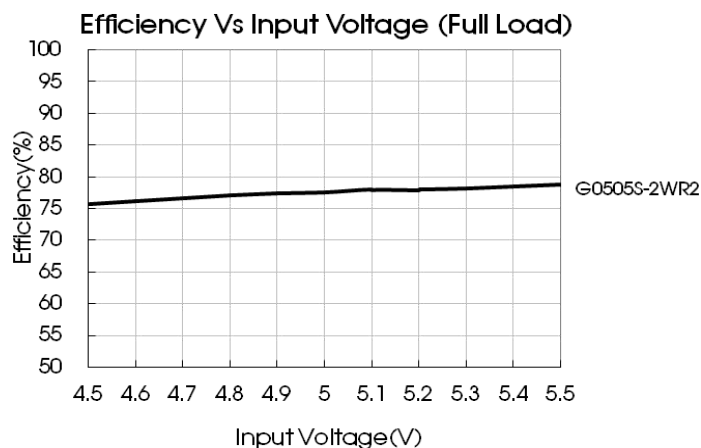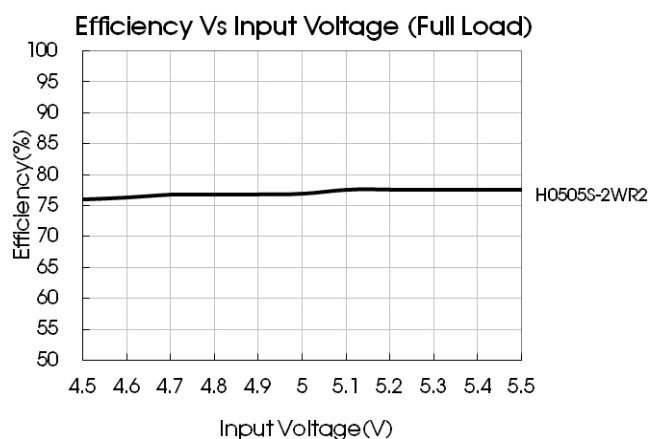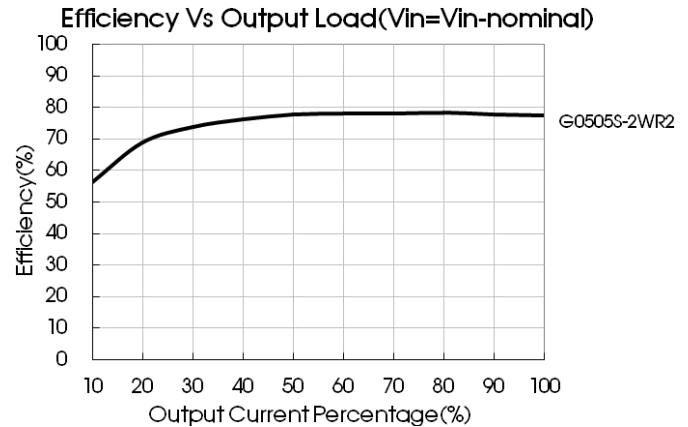

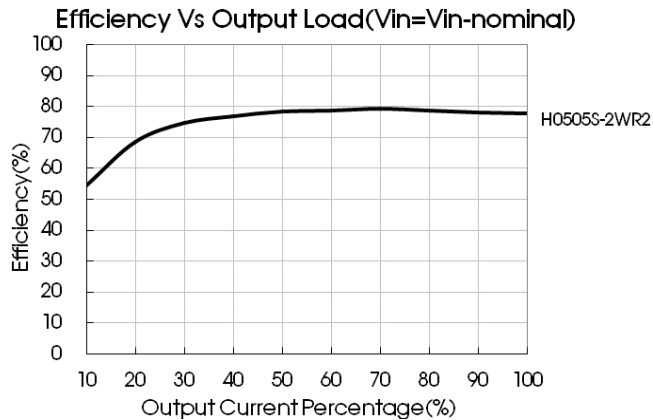

## Design Reference

### 1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

For a tight output voltage regulation, including overvoltage, overcurrent and over temperature protection, we recommend the use of a linear regulator that is connected in series to the input and/or output terminals as shown in Fig. 4.

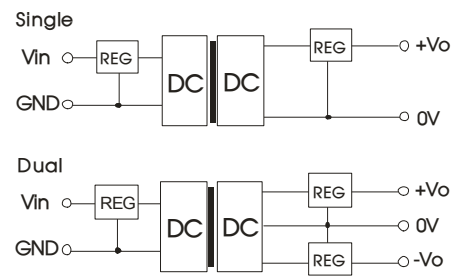
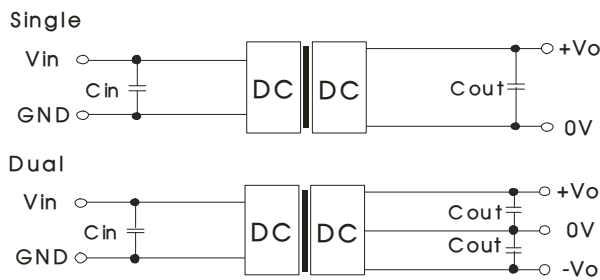


Table 1: Recommended input and output capacitor values

| Vin (VDC) | Cin (μF) | Single Vout (VDC) | Cout (μF) | Dual Vout (VDC) | Cout (μF) |
|-----------|----------|-------------------|-----------|-----------------|-----------|
| 5         | 10       | 5                 | 10        | ±5              | 4.7       |
| 12/15     | 4.7      | 12                | 2.2       | ±9              | 2.2       |
| 24        | 2.2      | 15                | 1         | ±12/±15         | 1         |

### 2. EMC (CLASS B) compliance circuit

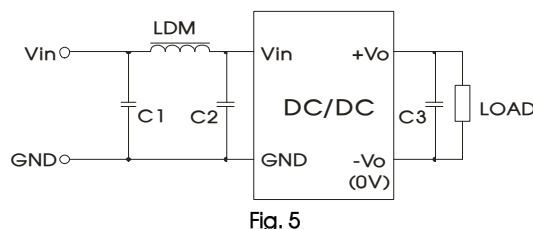


Table 2: Recommended EMC filter values

| Input voltage (V) |        | 5/12/15                    | 24   |
|-------------------|--------|----------------------------|------|
| EMI               | C1, C2 | 4.7μF /50V                 |      |
|                   | C3     | Refer to the Cout in Fig.3 |      |
|                   | LDM    | 6.8μH                      | 15μH |

Note: C1 and C2 of G1515S-2WR2 is 10μF/25V, LDM of G1515S-2WR2 is 22μH.


### 3. Output load requirements

For a reliable and efficient operation of the converter, the minimum load should never be less than 10% of the rated output load. If the total required output power is below 10%, a parallel bleeding resistor is required on the output, ensuring that the sum of the power consumption is always maintained at 10% minimum.


### 4. For additional information please refer to DC-DC converter application notes on

[www.mornsun-power.com](http://www.mornsun-power.com)

## Dimensions and Recommended Layout

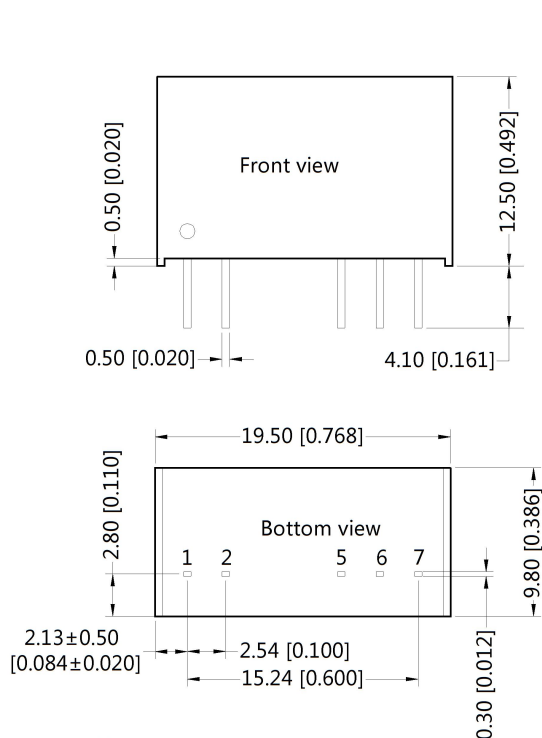

Note:  
Unit :mm[inch]  
Pin section tolerances:±0.10[±0.004]  
General tolerances:±0.25[±0.010]

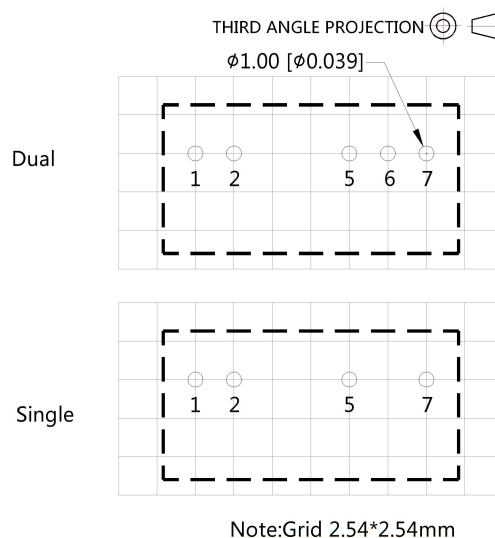

| Pin-Out |        |      |
|---------|--------|------|
| Pin     | Single | Dual |
| 1       | Vin    | Vin  |
| 2       | GND    | GND  |
| 5       | 0V     | -Vo  |
| 6       | No Pin | 0V   |
| 7       | +Vo    | +Vo  |

### Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58200013;
- In order to guarantee product performance and datasheet compliance, the product must be operated within specifications and load range requirement;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China  
Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)