

0.75W Isolated DC-DC converter
Fixed input voltage, regulated single output



EN 62368-1



BS EN 62368-1

RoHS

Patent Protection



FEATURES

- Continuous short-circuit protection
- No-load input current as low as 5mA
- Operating ambient temperature range: -40°C to +85°C
- High efficiency up to 74%
- Compact SMD package
- I/O isolation test voltage 1.5k VDC
- Industry standard pin-out

IB05_XT-W75R3 series is especially designed for distributed power supply systems where an isolated voltage is required. They are particularly suitable for applications of : pure digital circuits, general low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency(%) Min./Typ.	Capacitive Load (μF) Max.
		Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
EN/BS EN	IB0503XT-W75R3	5 (4.75-5.25)	3.3	200/20	64/68	2400
	IB0505XT-W75R3		5	150/15	68/72	2400
	IB0509XT-W75R3		9	83/9	68/72	1000
	IB0512XT-W75R3		12	62/7	69/73	560
	IB0515XT-W75R3		15	50/5	70/74	560

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5VDC input	3.3VDC/5VDC output	--	221/5	234/10	mA
		9VDC/12VDC output	--	208/12	221/20	
		15VDC output	--	202/18	215/30	
Reflected Ripple Current*			--	15	--	mA
Input Filter			Capacitance Filter			
Hot Plug			Unavailable			

Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			--	--	±3	%
Linear Regulation	Input voltage change: ±1%		--	--	±0.25	
Load Regulation	10%-100% load	3.3VDC output	--	--	±3	
		Others	--	--	±2	
Ripple & Noise*	20MHz bandwidth		--	30	75	mVp-p
Temperature Coefficient	100% load		--	±0.02	--	%/°C
Short-circuit Protection			Continuous, self-recovery			

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.		1500	--	--	VDC
	Input-output Electric Strength Test for 1 second with a leakage current of 1mA max.		3000	--	--	
Insulation Resistance	Input-output resistance at 500VDC		1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		--	20	--	pF
Operating Temperature	Derating when operating temperature≥71℃, (see Fig. 1)		-40	--	85	℃
Storage Temperature			-55	--	125	
Case Temperature Rise	Ta =25℃	3.3VDC output	--	30	--	
		Others	--	25	--	
Reflow Soldering Temperature*			Peak temp.≤245℃, maximum duration time≤60s over 217℃			
Storage Humidity	Non-condensing		--	--	95	%RH
Switching Frequency	100% load, nominal input voltage		--	270	--	kHz
MTBF	MIL-HDBK-217F@25℃		3500	--	--	k hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1		Level 1			
Note: * Please also refer to IPC/JEDEC J-STD-020D.1 for additional information.						

Note: * Please also refer to IPC/JEDEC J-STD-020D.1 for additional information.

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	13.20 x 11.40 x 7.25mm
Weight	1.4g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 3 for recommended circuit)
	RE	CISPR32/EN55032	CLASS B (see Fig. 3 for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Air $\pm 8\text{kV}$, Contact $\pm 4\text{kV}$ perf. Criteria B

Typical Characteristic Curves



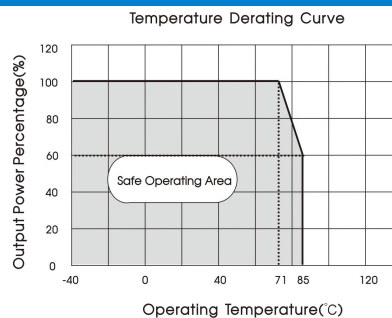


Fig. 1

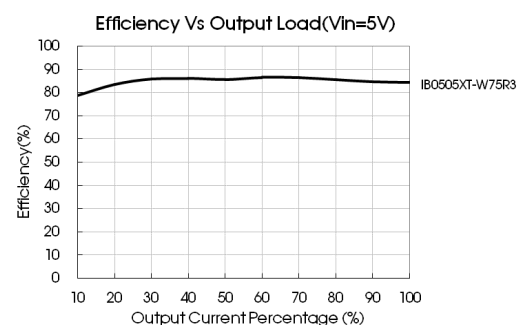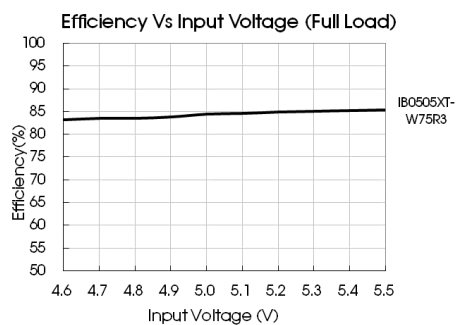

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 2.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

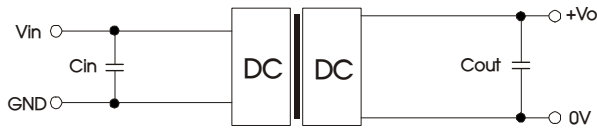


Fig. 2

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
5VDC	4.7μF/16V	3.3/5VDC	10μF/16V
		9/12VDC	2.2μF/16V
		15VDC	1μF/25V

2. EMC compliance circuit

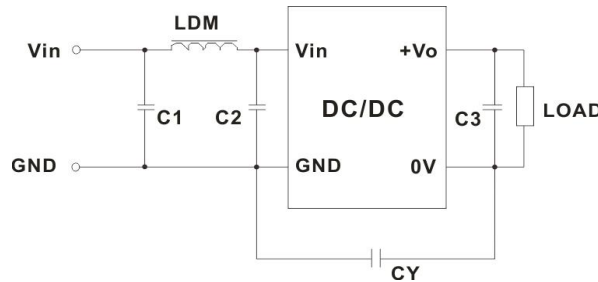


Fig. 3

Table 2: Recommended EMC filter values

Input voltage 5VDC	Output voltage	3.3/5/9VDC	12/15VDC
	C1/C2	4.7μF /25V	4.7μF /25V
	CY	--	1nF /2kVDC HEC C1206X102K202T JOHANSON 202R18W102KV4E
	C3	Refer to the Cout in table 1	
	LDM	6.8μH	6.8μH


Note: We recommend the use of a Y-capacitor CY with a value of 1nF/4kV to help even further reduce emissions.

3. For additional information please refer to DC-DC converter application notes on


www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

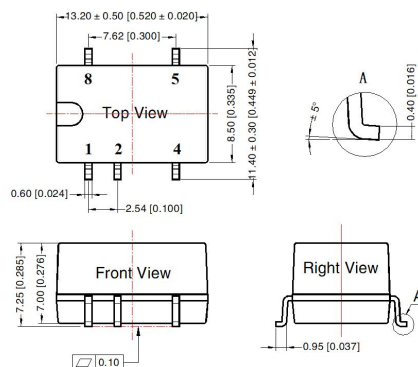

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 0.25 [\pm 0.010]$




Note: Grid 2.54*2.54mm

Pin	Mark
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: Pin to be isolated from circuitry

Tape and Reel Info

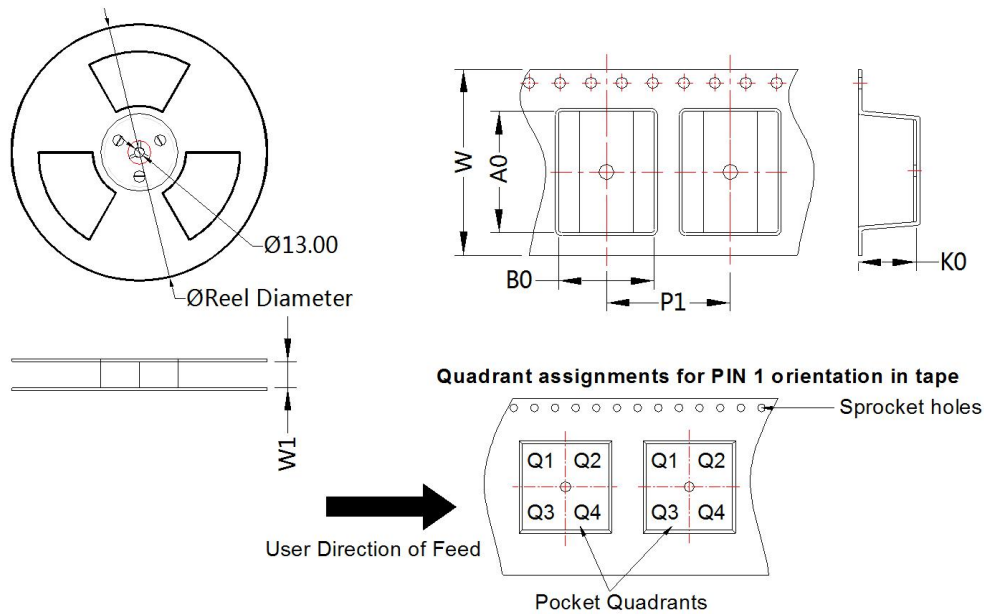

Device	Package Type	Pin	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
IB05_XT-W75R3	SMD	5	500	330.0	24.5	13.4	11.7	7.5	16.0	24.0	Q1

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Tube Packaging bag number: 58210024, Roll Packaging bag number: 58200054;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com