

AC/DC 35W Enclosed Switching Power Supply

LM35-20Bxx(-C, -Q) Series

MORNSUN®



CE Report

EN62368-1
EN60335-1
EN61558-1

CB

GB4943.1

IEC62368-1

BS EN62368-1

UK

RoHS



IS13252/Part 1:2010/IEC 60060-1:2005

BS-4120:2000

www.bis.gov.in

FEATURES

- Universal 85 - 264VAC or 120 - 370VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (designed to meet EN61558)
- Operating altitude up to 5000m
- 3 years warranty

LM35-20Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, IEC/EN60335, GB4943, IEC/EN61558 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range(V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
EN/CCC/IEC/BIS	LM35-20B05	35	5V/7A	4.5-5.5	86	8000
	LM35-20B12	36	12V/3A	10.2-13.8	88	1500
	LM35-20B15		15V/2.4A	13.5-18	89	1000
	LM35-20B24		24V/1.5A	21.6-28.8	88	750

Note: *1. Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

2. The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	0.8	A
	230VAC		--	--	0.6	
Inrush Current	115VAC	Cold start	--	30	--	
	230VAC		--	50	--	
leakage current	240VAC		<0.75mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	5V	--	±1	--	
		12V/15V/24V	--	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	80	--	mV
		12V/15V	--	120	--	
		24V	--	150	--	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.09-A/1

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

AC/DC 35W Enclosed Switching Power Supply

LM35-20Bxx(-C, -Q) Series

MORNSUN®

Temperature Coefficient		--	±0.03	--	%/°C
Minimum Load		0	--	--	%
Stand-by Power Consumption		--	--	0.3	W
Hold-up Time	115VAC	8	--	--	ms
	230VAC	30	--	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recover		
Over-current Protection			110%-200% Io, self-recover		
Over-voltage Protection	5V	≤6.3VDC (Hiccup, self-recover)			
	12V	≤16.2VDC (Hiccup, self-recover)			
	15V	≤21.75VDC (Hiccup, self-recover)			
	24V	≤33.6VDC (Hiccup, self-recover)			

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <10mA		2000	--	--	VAC
	Input - output			4000	--	--	
	Output - ⊕			1250	--	--	
Insulation Resistance	Input - ⊕	At 500VDC		100	--	--	M Ω
	Input - output			100	--	--	
	Output - ⊕			100	--	--	
Operating Temperature				-30	--	+70	℃
Storage Temperature				-40	--	+85	
Storage Humidity		Non-condensing		--	--	95	%RH
Operating Humidity				20	--	90	
Switching Frequency				--	65	--	kHz
Power Derating	Operating temperature derating	-30℃ to -25℃	85VAC-100VAC	5	--	--	% /℃
		+50℃ to +70℃		2	--	--	
	Input voltage derating		85VAC - 100VAC	1.33	--	--	%/VAC
Safety Standard				IEC/EN/BS EN62368-1, GB4943.1, IS13252(Part1) & EN60335-1, EN61558-1 safety approved; Design refer to UL62368-1, IEC60335-1, IEC61558-1			
Safety Class				CLASS I			
MTBF		MIL-HDBK-217F@25℃		> 300,000 h			

Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimension	99.00 x 82.00 x 30.00 mm
Weight	170g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B			
	RE	CISPR32/EN55032 CLASS B			
	Harmonic current	IEC/EN61000-3-2 CLASS A			
Immunity	ESD	IEC/EN 61000-4-2 Contact ±6KV/Air ±8KV			perf. Criteria A
	RS	IEC/EN 61000-4-3 10V/m			perf. Criteria A

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.09-A/1 Page 2 of 4



MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

AC/DC 35W Enclosed Switching Power Supply **MORNSUN**[®]

LM35-20Bxx(-C, -Q) Series



EFT	IEC/EN 61000-4-4 $\pm 2\text{KV}$	perf. Criteria A
Surge	IEC/EN 61000-4-5 line to line $\pm 2\text{KV}$ /line to PE $\pm 4\text{KV}$	perf. Criteria A
CS	IEC/EN 61000-4-6 10 Vr.m.s	perf. Criteria A
Voltage dip, short interruption and voltage variation	IEC/EN 61000-4-11 0%, 70%	perf. Criteria B

Product Characteristic Curve

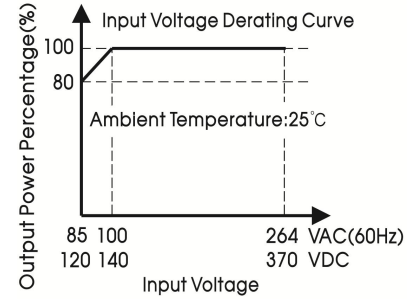


Note: 1. With an AC input voltage between 85-100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

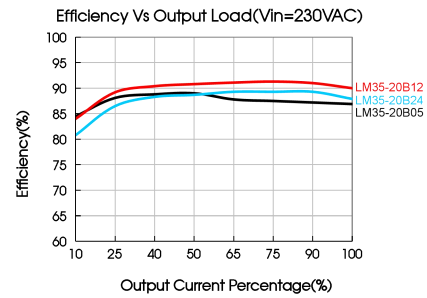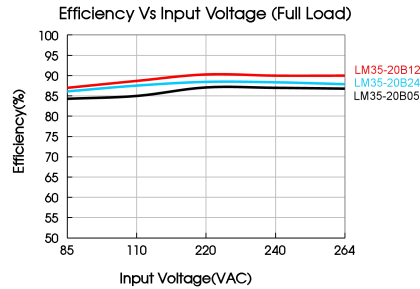

Dimensions and Recommended Layout


LM35-20Bxx, LM35-20Bxx-Q Series

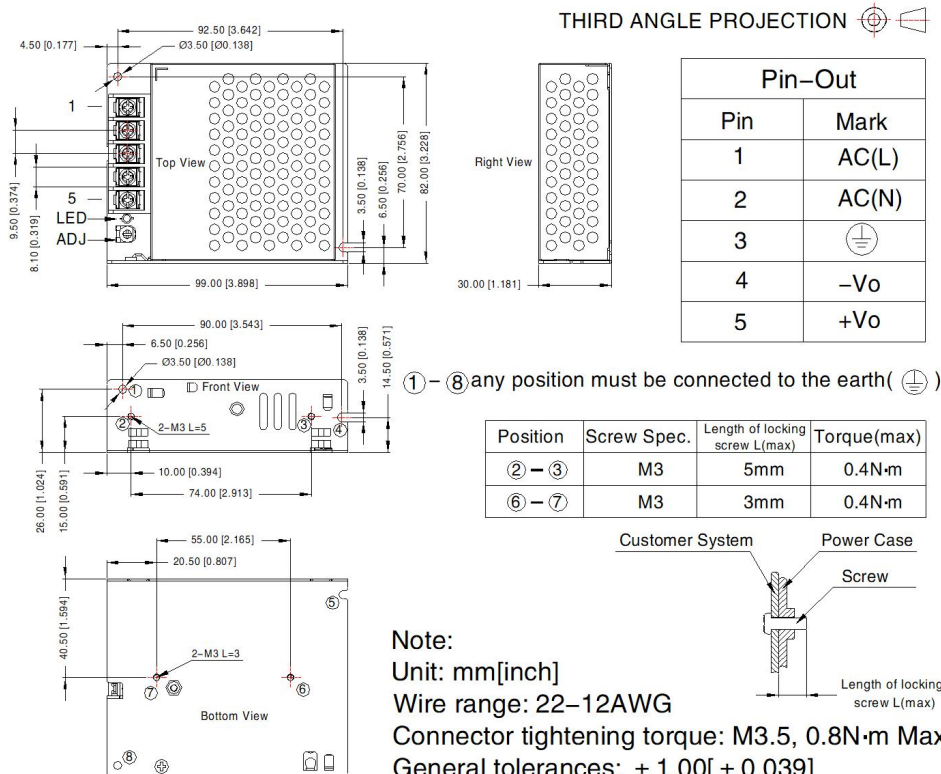

AC/DC 35W Enclosed Switching Power Supply **MORNSUN**[®]

LM35-20Bxx(-C, -Q) Series

LM35-20Bxx-C Series

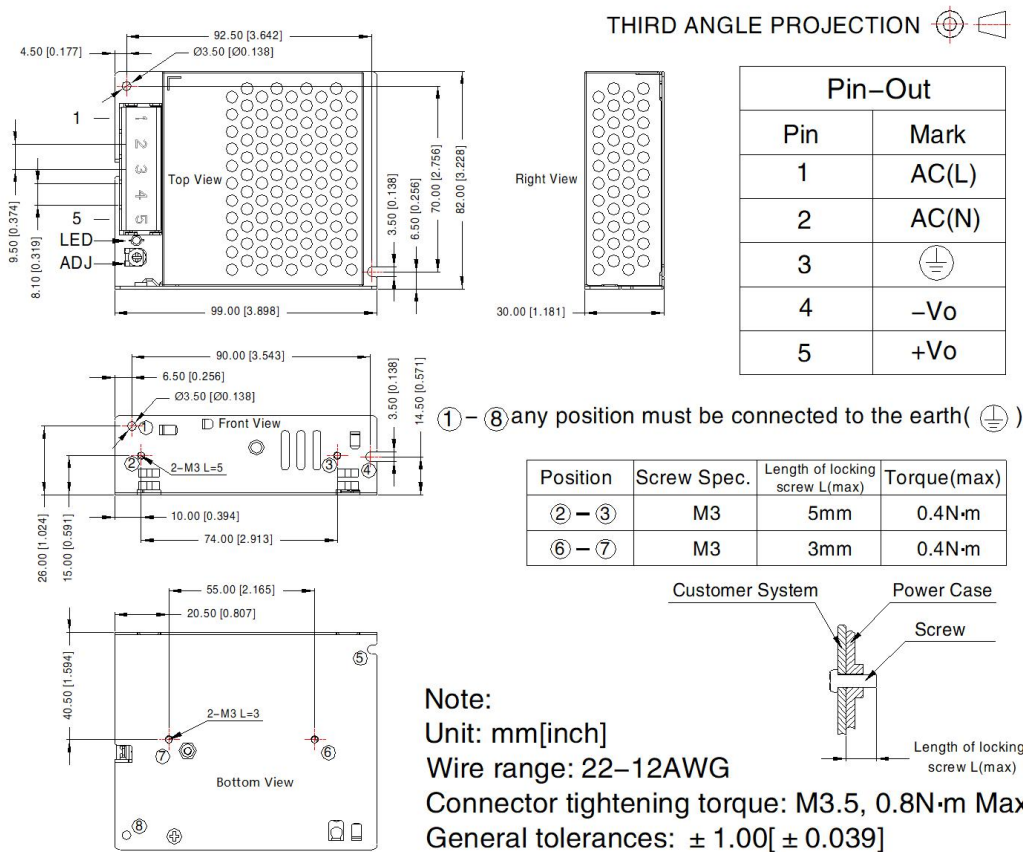

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220118;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% RH with nominal input voltage and rated output load;
- The room temperature derating of $5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The output voltage can be adjusted by the ADJ, clockwise to increase;
- The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com

MORNSUN[®]

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.09-A/1

Page 4 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation