


1W, AC/DC converter

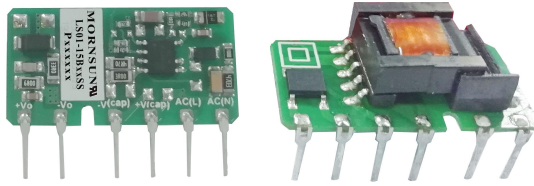

FEATURES

- Ultra-wide 85 - 305VAC and 70 - 430VDC input voltage Range
- AC and DC dual-use (input from the same terminal)
- Compact size, high power density
- Output short circuit, over-current protection
- IEC/UL60950, EN62368 safety approval

LS01-15BxxSS(-F) series is one of Mornsun's highly efficient green power AC-DC Converter series. They feature wide input range accepting either AC or DC voltage, high efficiency, low power consumption and CLASS II reinforced insulation. All models are particularly suitable for industrial control, electric power, instrumentation and smart home applications which don't have high requirement for dimension. A variety of EMC external circuits meet the needs of multiple industries.

Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current(Vo/Io)	Efficiency (230VAC, %/Typ.)	Max. Capacitive Load (uF)
UL/CE/CB	LS01-15B05SS(-F)	1W	5V/200mA	66	220
	LS01-15B09SS(-F)		9V/111mA	67	100
	LS01-15B12SS(-F)		12V/83mA	70	100
	LS01-15B15SS(-F)		15V/67mA	69	100
	LS01-15B24SS(-F)		24V/42mA	68	100

Note: If the product is used in a severe vibration application, it needs to be glued and fixed.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	70	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	0.12	A
	277VAC	--	--	0.06	
Inrush Current	115VAC	--	9	--	
	277VAC	--	15	--	
Recommended External Input Fuse		1A, slow-blow, required			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	LS01-15B05SS(-F)		--	--	±8	%
	LS01-15B09SS(-F)		--	--	±5	
	LS01-15B12SS(-F)		--	--		
	LS01-15B15SS(-F)		--	--		
	LS01-15B24SS(-F)		--	--		
Line Regulation	Full load		--	±1.5	--	
Load Regulation	5% - 100% load	5V/9V/12V/15V	--	±3.0	--	
		24V	--	±6.0	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		--	50	120	mV
Temperature Coefficient			--	±0.15	--	%/°C
Stand-by Power Consumption	5V/9V/12V/15V		--	0.15	0.25	W
	24V		--	0.2	0.3	

Short Circuit Protection		Continuous, self-recovery			
Over-current Protection		110 - 500%Io, self-recovery			
Min. Load		5	--	--	%
Hold-up Time	230VAC input	150	180	--	ms
Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.					

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output	3000	--	--	VAC
Operating Temperature		-40	--	+85	°C
Storage Temperature		-40	--	+105	
Storage Humidity		--	--	85	%RH
Switching Frequency		--	--	100	kHz
Safety Standard		IEC60950/EN62368/UL60950			
Safety Certification		IEC60950/EN62368/UL60950			
Safety Class		CLASS II			
MTBF		MIL-HDBK-217F@25°C>1,000,000 h			



Mechanical Specifications

Dimensions	35.00 x 18.00 x 11.00 mm
Weight	6 g (Typ.)
Cooling method	Free air convection



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (Recommended circuit 1, 2, 6)	
		CISPR32/EN55032	CLASS B (Recommended circuit 3, 4, 5)	
	RE	CISPR32/EN55032	CLASS A (Recommended circuit 1, 2, 6)	
		CISPR32/EN55032	CLASS B (Recommended circuit 3, 4, 5)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±4KV	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (Recommended circuit 1, 2, 3)	perf. Criteria B
		IEC/EN61000-4-4	±4KV (Recommended circuit 4, 5, 6)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±1KV (Recommended circuit 1, 2)	perf. Criteria B
		IEC/EN61000-4-5	line to line ±2KV (Recommended circuit 6)	
		IEC/EN61000-4-5	line to line±1KV/line to ground ±2KV (Recommended circuit 3)	perf. Criteria B
		IEC/EN61000-4-5	line to line±2KV/line to ground ±4KV (Recommended circuit 4, 5)	
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B


Product Characteristic Curve

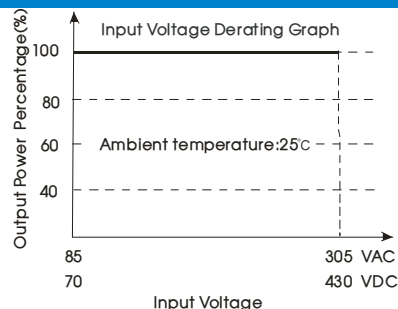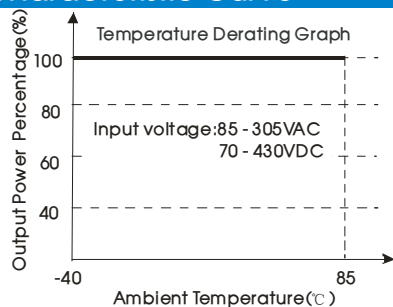

Note: This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

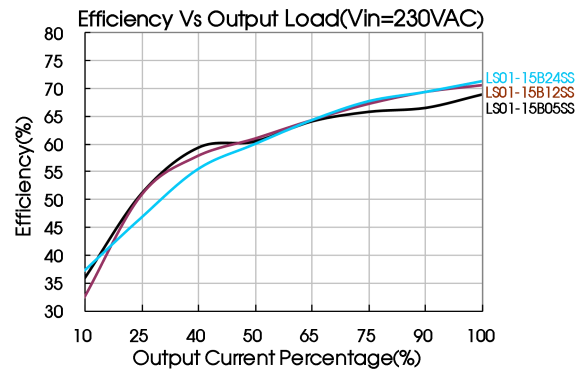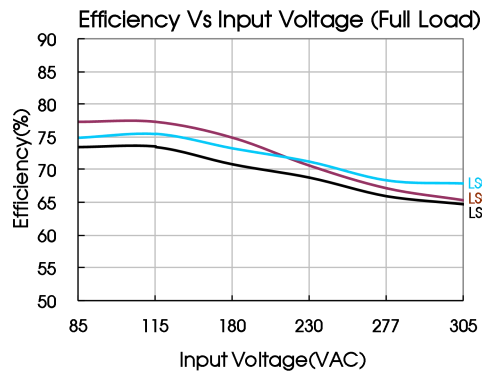

Additional Circuits Design Reference

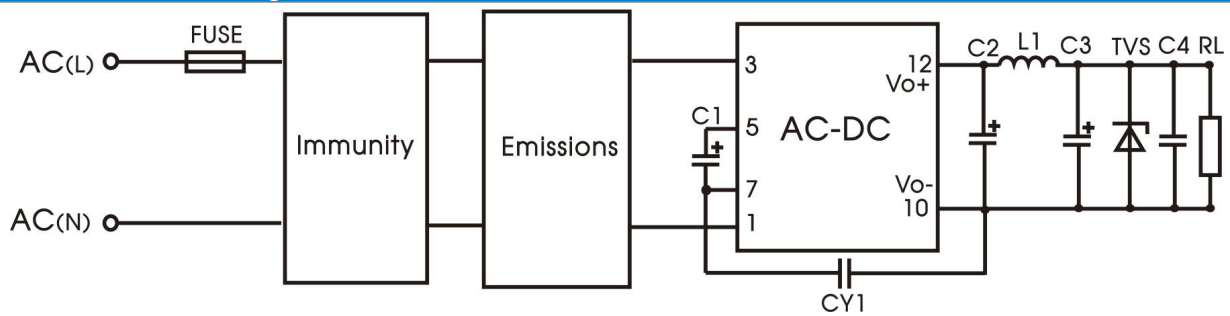

LS series additional circuits design reference

Immunity design circuits for reference		Emissions design circuits for reference	
CLASS III	CLASS IV	CLASS A	CLASS B

LS series additional components selection guide

Part No.	FUSE (required)	C1(required)	C2 (required)	L1 (required)	C3 (required)	C4	CY1 (required)	TVS
LS01-15B05SS(-F)	1A/300V	4.7uF/450V (-20°C to +85°C) 10uF/450V (-40°C to +85°C)	270uF/16V (solid-state capacitor)	2.2uH (Max 60mΩ)	68uF/35V	0.1uF/50V	1.0nF/400VAC	SMBJ7.0A
LS01-15B09SS(-F)			100uF/16V (solid-state capacitor)					SMBJ12A
LS01-15B12SS(-F)			100uF/35V					SMBJ20A
LS01-15B15SS(-F)								SMBJ20A
LS01-15B24SS(-F)								SMBJ30A

Note:

1. C1: input capacitors, C2: output storage capacitors, they must be connected externally.
2. We recommend using an electrolytic capacitor with high frequency and low ESR rating for C3 (refer to manufacture's datasheet). Combined with C2, L1, they form a pi-type filter circuit. Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C4 is a ceramic capacitor, used for filtering high frequency noise. A suppressor diode (TVS) is a recommended to protect the application in case of a converter failure and specification should be 1.2 times of the output voltage.


Environmental Application EMC Solution

LS series environmental application EMC solution selection table

Recommended circuit	Application environmental	Typical industry	Input voltage range	Environment temperature	Emissions	Immunity
1/2	Basic application	None	85~305VAC	-40℃ to +85℃	CLASS A	CLASS III
3	Indoor civil environment	Smart home/Home appliances (2Y)		-25℃ to +55℃	CLASS B	CLASS III
	Indoor general environment	Intelligent building/Intelligent agriculture		-25℃ to +55℃	CLASS B	CLASS IV
4/5	Indoor industrial environment	Manufacturing workshop		-25℃ to +55℃	CLASS B	CLASS IV
6	Outdoor general environment	ITS/Video monitoring/Charging point/Communication/Security and protection		-40℃ to +85℃	CLASS A	CLASS IV

Electromagnetic Compatibility Solution—Recommended Circuit


1. Recommended circuit 1/2—Basic application

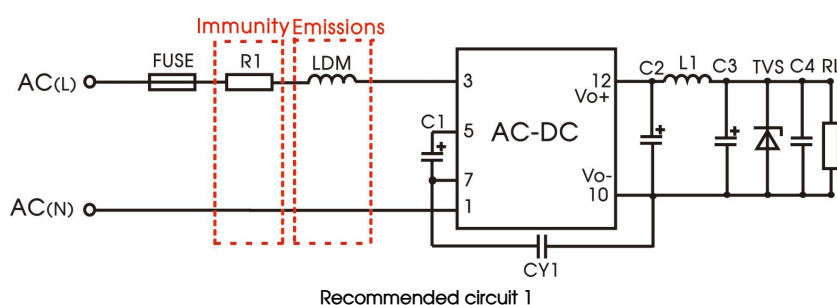

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Basic application	-40℃ to +85℃	CLASS III	CLASS A

Component	Recommended value
R1 (wire-wound resistor, required)	12Ω /3W
LDM	4.7mH
FUSE (required)	1A/300V, slow-blow

Note: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select chip resistor or carbon film resistor.

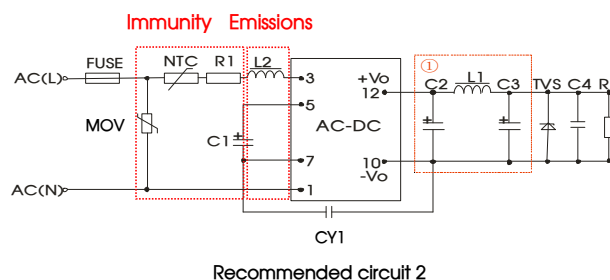


Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Basic application	-40℃ to +85℃	CLASS III	CLASS A

Component	Recommended value
R1 (wire-wound resistor, required)	12Ω /2W
L2	4.7mH
NTC	13D-5
MOV	S14K350
FUSE (required)	1A/300V, slow-blow

Note: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select chip resistor or carbon film resistor.

2. Recommended circuit 3—Indoor civil /Universal system recommended circuits for general environment

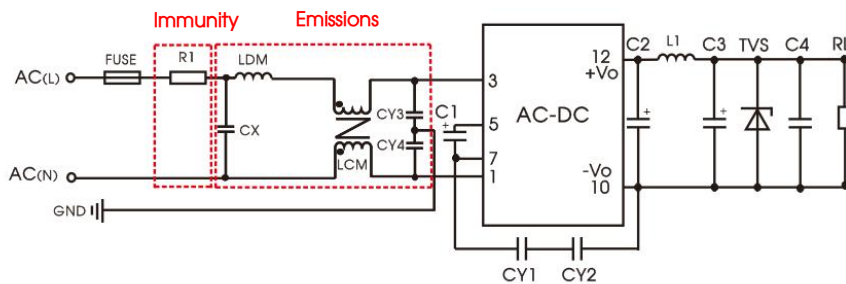

Recommended circuit 3


Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor civil /general	-25°C to +55°C	CLASS III	CLASS B

Component	Recommended value
R1 (wire-wound resistor, required)	12Ω/3W
CY1(CY2)	1.0nF/400VAC
LCM	3.5mH
LDM	0.33mH
CX	0.1uF/310VAC
CY3, CY4	0.56nF/400VAC
FUSE (required)	1A/300V, slow-blow

Note 1: In the home appliance application environment, the two Y capacitors of the primary and secondary need to be externally connected (CY1/CY2, value at 2.2nF/400VAC), which can meet the EN60335 certification. In other industries, only one Y capacitor is needed.

Note 2: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select chip resistor or carbon film resistor.

3. Recommended circuit 4/5—Universal system recommended circuits for indoor industrial environment

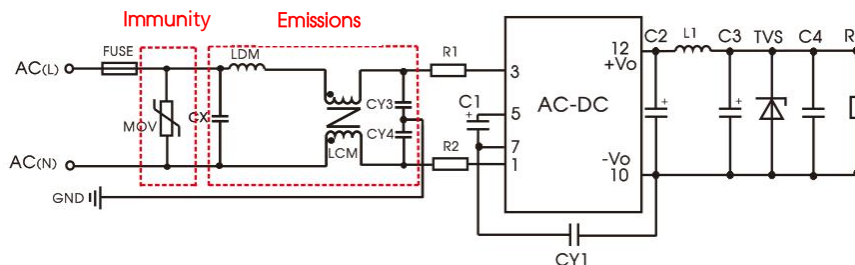


Recommended circuit 4

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor industrial	-25°C to +55°C	CLASS IV	CLASS B

Component	Recommended value
MOV	S14K350
C1	450V/10uF
CY1	2.2nF/400VAC
CX	0.1uF/310VAC
LCM	3.5mH
LDM	0.33mH
R1, R2 (wire-wound resistor, required)	12Ω/2W
CY3, CY4	0.56nF/400VAC
FUSE (required)	2A/300V, slow-blow

Note: R1, R2 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select chip resistor or carbon film resistor.

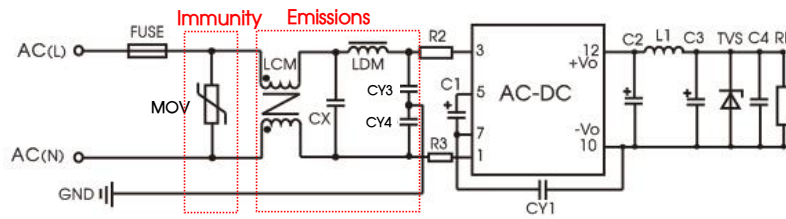


Recommended circuit 5

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor industrial	-25°C to +55°C	CLASS IV	CLASS B

Component	Recommended value
MOV	S14K350
C1	450V/10uF
CY1	2.2nF/400VAC
CY3, CY4	0.56nF/400VAC
CX	0.1uF/310VAC
LCM	3.5mH
LDM	0.33mH
R2, R3 (wire-wound resistor, required)	12Ω /2W
FUSE (required)	2A/300V, slow-blow

Note: R2, R3 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select chip resistor or carbon film resistor.

4. Recommended circuit 6—Universal system recommended circuits for outdoor general/harsh environment

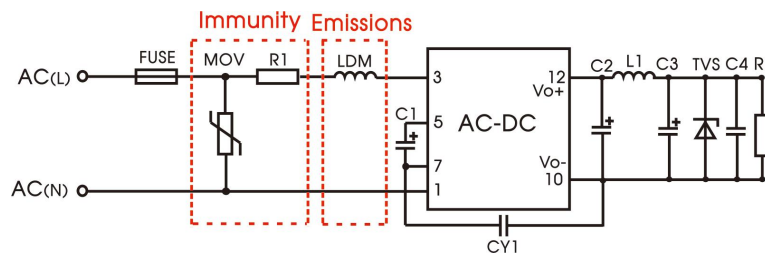

Recommended circuit 6


Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Outdoor general environment	-40°C to +85°C	CLASS IV	CLASS A

Component	Recommended value
MOV	S14K350
C1	450V/10uF
LDM	4.7mH
R1 (wire-wound resistor, required)	12Ω /3W
FUSE (required)	2A/300V, slow-blow


Note: R1 is the input plug-in resistor, this resistor needs to be a wire-wound resistor (required), please do not select chip resistor or carbon film resistor.

5. For additional information please refer to application notes on www.mornsun-power.com.

LS01-15BxxSS Dimensions and Recommended Layout

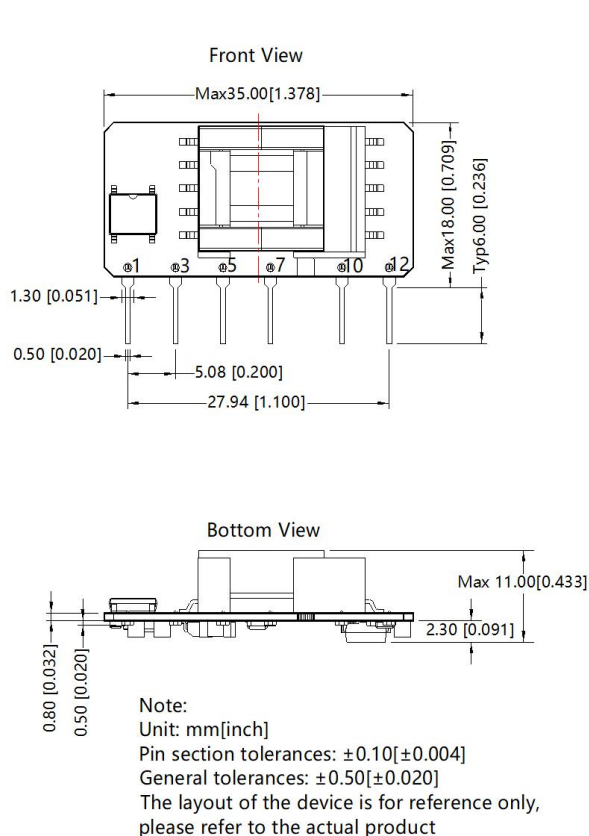

THIRD ANGLE PROJECTION

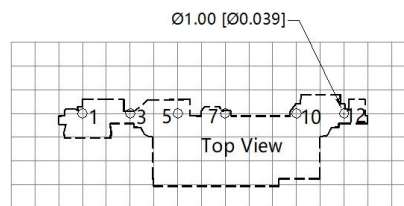


Note: Grid 2.54*2.54mm


Pin-Out	
Pin	Function
1	AC (N)
3	AC (L)
5	+V(cap)
7	-V(cap)
10	-Vo
12	+Vo

- 1.It is necessary to add C1 between pin5 and pin7.
- 2.It is necessary to add circuit to the output, such as the typical application of Figure 1.
- 3.It is needed to have distance $\geq 6.4\text{mm}$ for safety between external componets in primary circuit and secondary circuit.

LS01-15BxxSS-F Dimensions and Recommended Layout

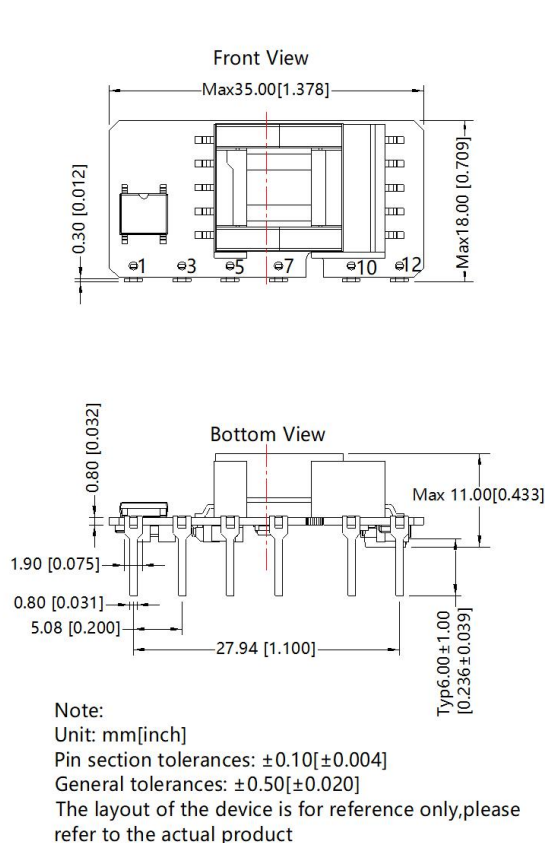

THIRD ANGLE PROJECTION

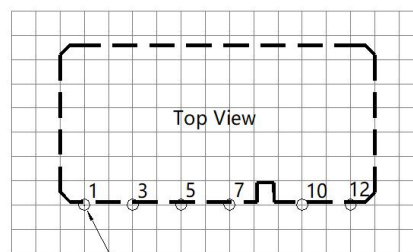

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	AC (N)
3	AC (L)
5	+V(cap)
7	-V(cap)
10	-Vo
12	+Vo

- 1.It is necessary to add C1 between pin5 and pin7.
- 2.It is necessary to add circuit to the output, such as the typical application of Figure 1.
- 3.It is needed to have distance $\geq 6.4\text{mm}$ for safety between external componets in primary circuit and secondary circuit.

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220084(LS01-15BxxSS); 58220025(LS01-15BxxSS-F);
2. External electrolytic capacitors are required to modules, more details refer to typical applications;
3. This part is open frame, at least 6.4mm safety distance between the primary and secondary external components of the module is needed to meet the safety requirement;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%, nominal input voltage (115V and 230V) and rated output load;
5. In order to increase the conversion efficiency of the product with light load in the design, the product will have audio noise when it is operating, but don't affect the product's reliability and performance;
6. All index testing methods in this datasheet are based on our company corporate standards;
7. We can provide product customization service, please contact our technicians directly for specific information;
8. Products are related to laws and regulations: see "Features" and "EMC";
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com