




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level.

250SR160 Impedance —————
 250SR160 Phase - - - - -
 250ST160 Impedance —————
 250ST160 Phase - - - - -

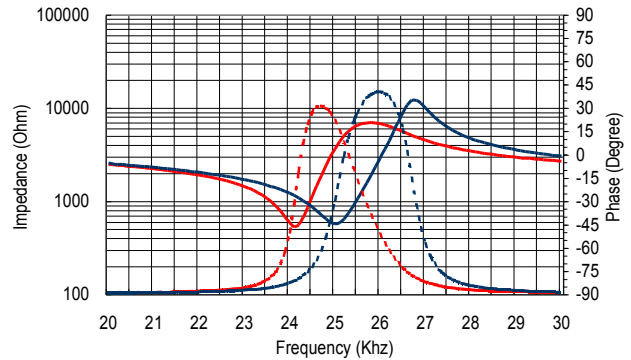


Specification

250ST160	Transmitter
250SR160	Receiver
Center Frequency	25.0±1.0KHz
Bandwidth (-6dB)	250ST: 2.0KHz 250SR: 2.0KHz
Transmitting Sound Pressure Level at 25.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	112dB min.
Receiving Sensitivity at 25.0KHz 0dB = 1 volt/µbar	-62dB min.
Capacitance at 1KHz	±20% 2600 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle	-6dB 85° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

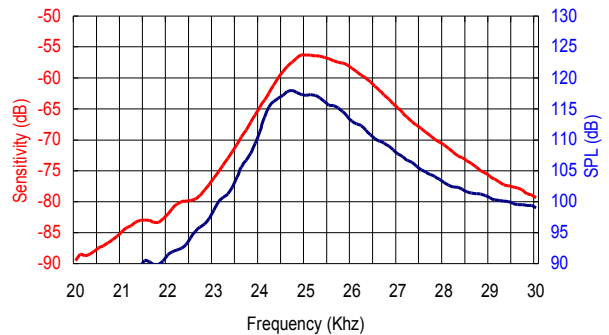

Model available:


1	250ST/R160	Aluminum Housing
2	250ST/R16B	Black Al. Housing
3	250ST/R16P	Plastic Housing

Dimensions: dimensions are in mm

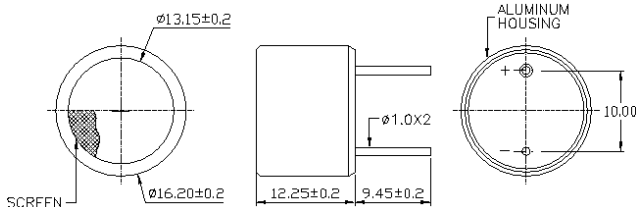

Beam Angle

Tested at 25.0KHz frequency

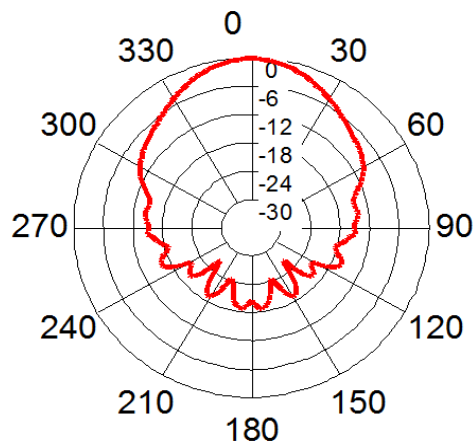


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


250SR160 Receiver

Sensitivity Variation vs. Loaded Resistor

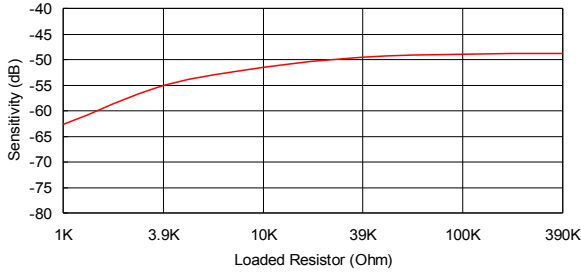


250ST160 Transmitter


SPL Variation vs. Driving Voltage

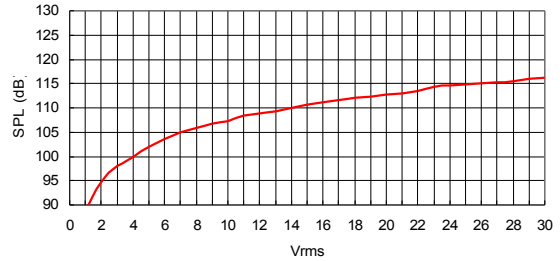


Center Frequency Shift vs. Loaded Resistor

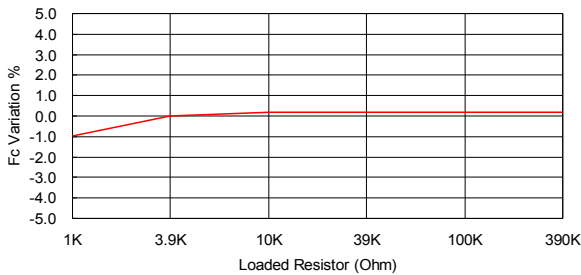


Center Frequency Shift vs. Driving Voltage

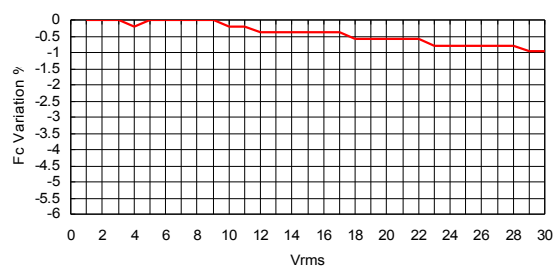


Sensitivity Variation vs. Temperature

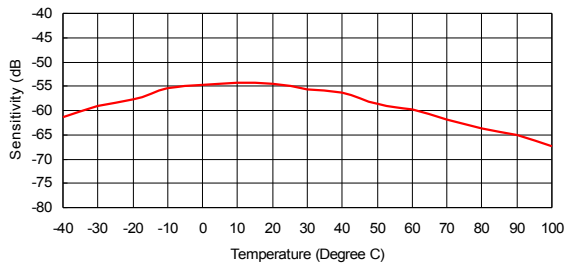


SPL Variation vs. Temperature

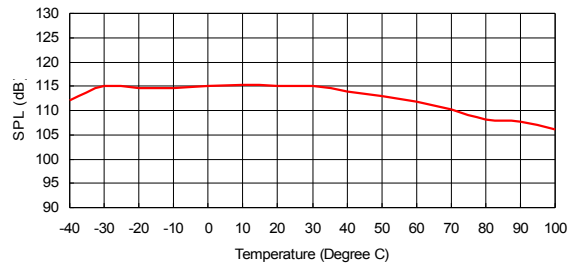

Center Frequency Shift vs. Temperature

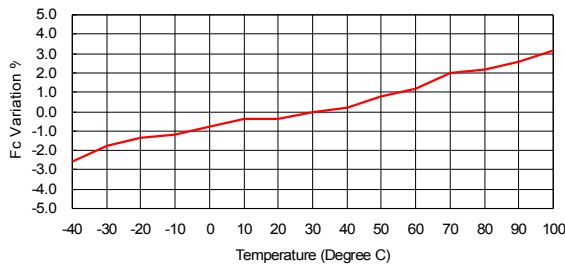

Center Frequency Shift vs. Temperature

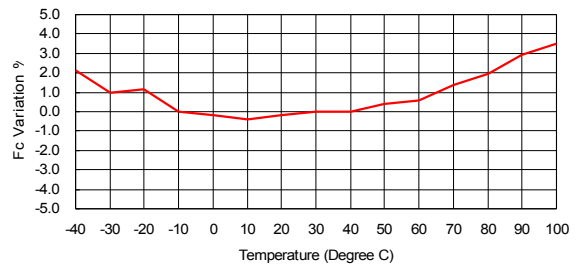




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

250SR180 Impedance ————
 250SR180 Phase - - - - -
 250ST180 Impedance ————
 250ST180 Phase - - - - -

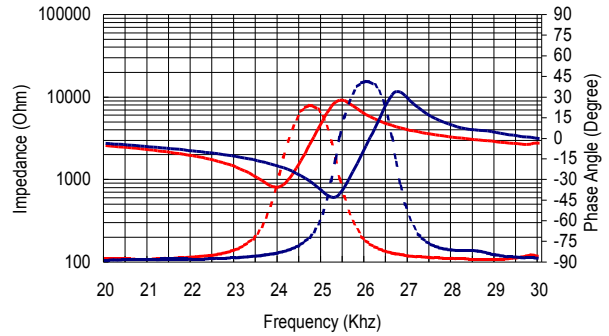

Specification


250ST180	Transmitter
250SR180	Receiver
Center Frequency	25.0±1.0KHz
Bandwidth (-6dB)	250ST180 1.5KHz 250SR180 1.8KHz
Transmitting Sound Pressure Level at 25.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	112dB min.
Receiving Sensitivity at 25.0KHz 0dB = 1 volt/µbar	-62dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	95° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Model available:


1	250ST/R180	Aluminum Housing
2	250ST/R18B	Black Al. Housing

Dimensions: dimensions are in mm

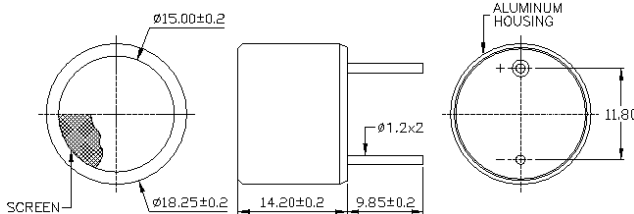


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

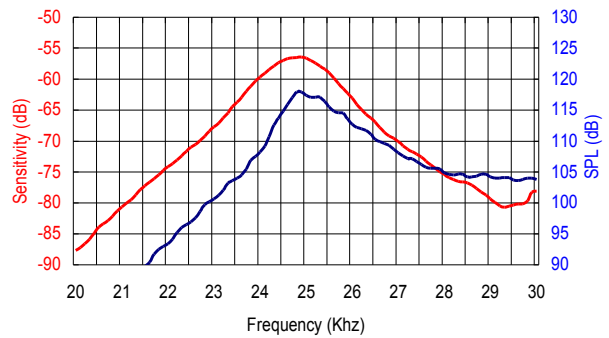

Beam Angle

Tested at 25.0KHz frequency

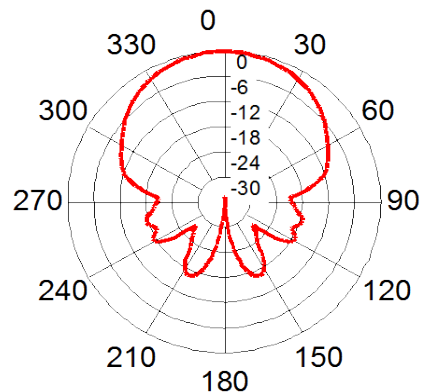


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


250SR180 Receiver

Sensitivity Variation vs. Loaded Resistor

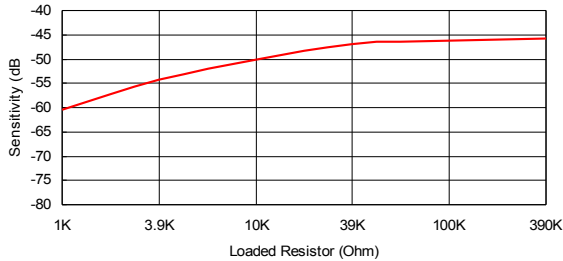


250ST180 Transmitter


SPL Variation vs. Driving Voltage

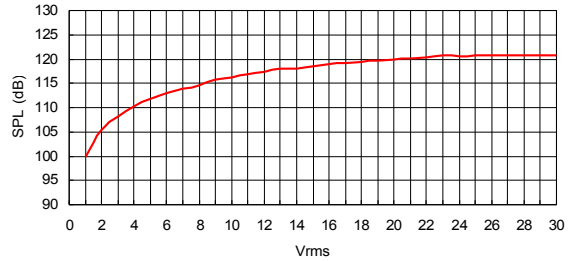


Center Frequency Shift vs. Loaded Resistor

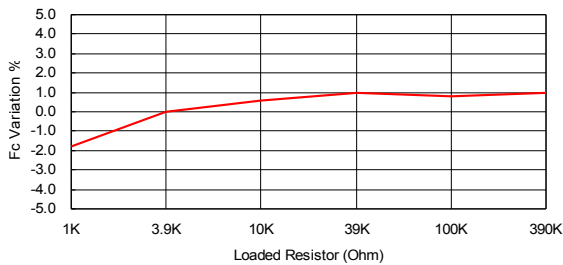


Center Frequency Shift vs. Driving Voltage

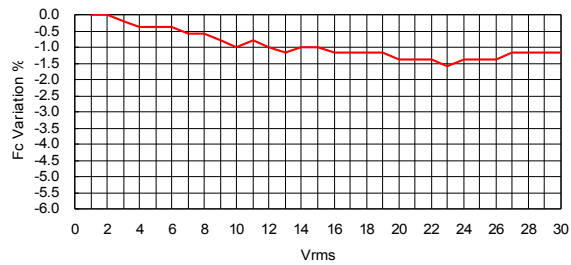


Sensitivity Variation vs. Temperature

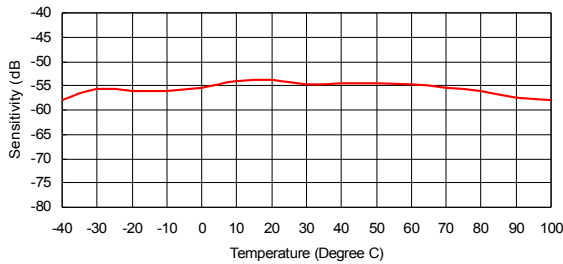


SPL Variation vs. Temperature

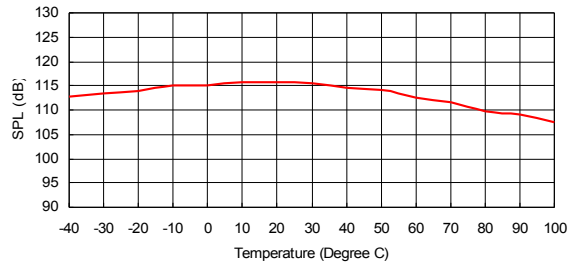

Center Frequency Shift vs. Temperature

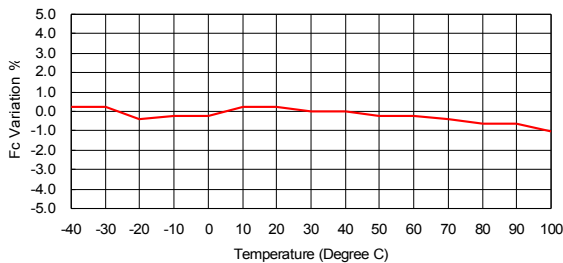

Center Frequency Shift vs. Temperature

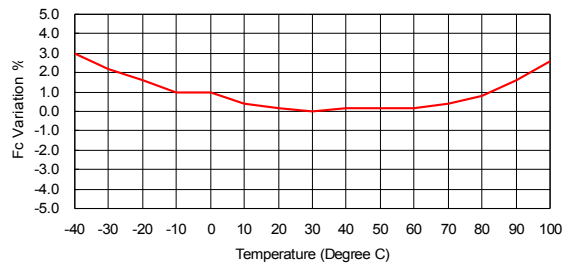




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

250SR240 Impedance ————
 250SR240 Phase - - - - -
 250ST240 Impedance ————
 250ST240 Phase - - - - -

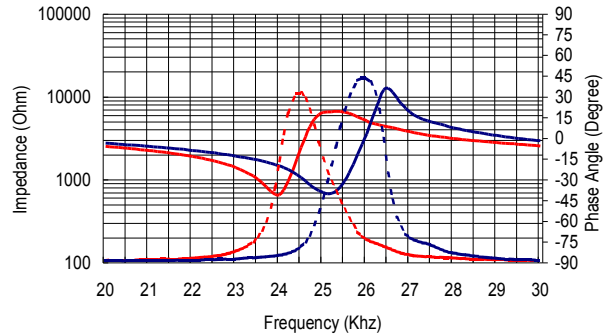


Specification

250ST240	Transmitter
250SR240	Receiver
Center Frequency	25.0±1.0KHz
Bandwidth (-6dB)	250ST240 1.5KHz
	250SR240 1.8KHz
Transmitting Sound Pressure Level at 25.0KHz; 0dB re 0.0002μbar per 10Vrms at 30cm	115dB min.
Receiving Sensitivity at 25.0KHz 0dB = 1 volt/μbar	-60dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	45° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

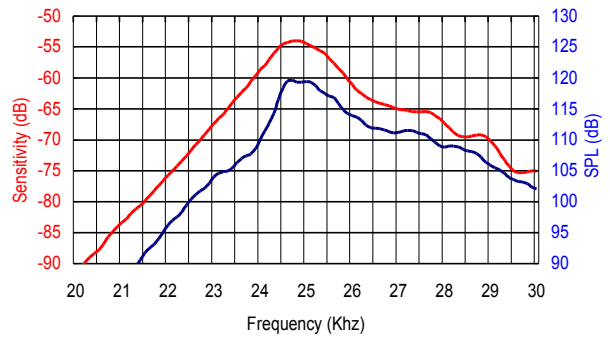

Beam Angle


Tested at 25.0KHz frequency

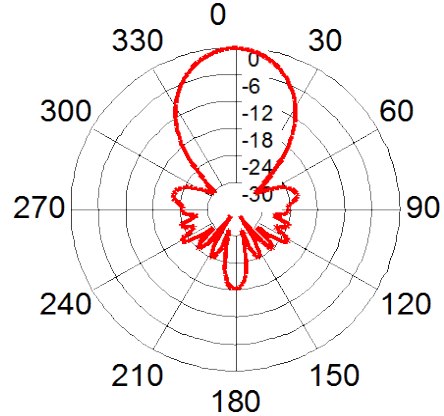

Model available:

1	250ST/R240	Aluminum Housing
---	------------	------------------

Dimensions: dimensions are in mm

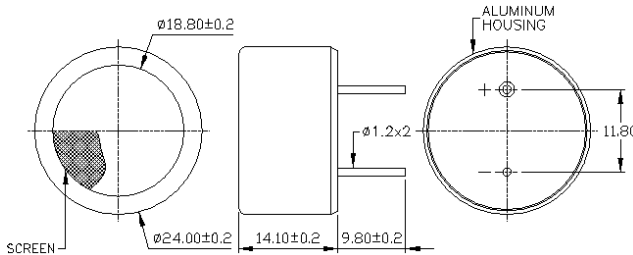


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


250SR240 Receiver

Sensitivity Variation vs. Loaded Resistor

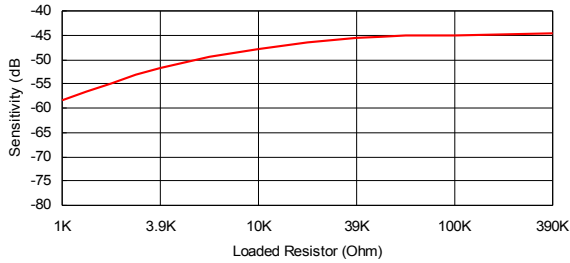


250ST240 Transmitter


SPL Variation vs. Driving Voltage

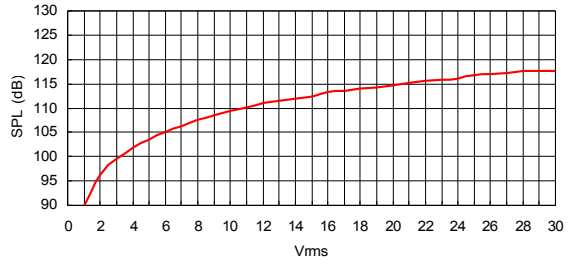


Center Frequency Shift vs. Loaded Resistor

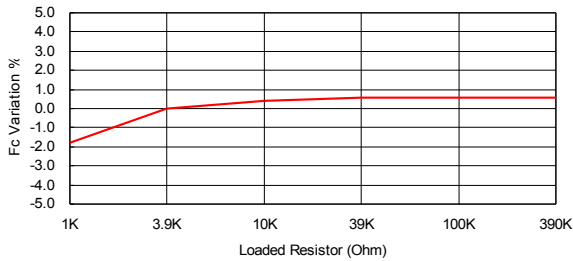


Center Frequency Shift vs. Driving Voltage

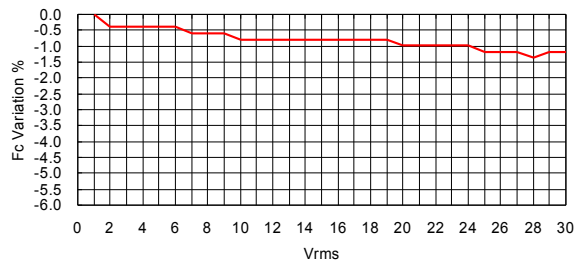


Sensitivity Variation vs. Temperature

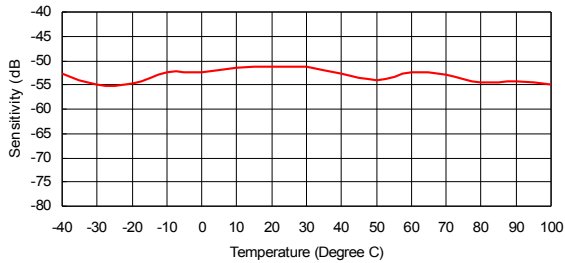


SPL Variation vs. Temperature

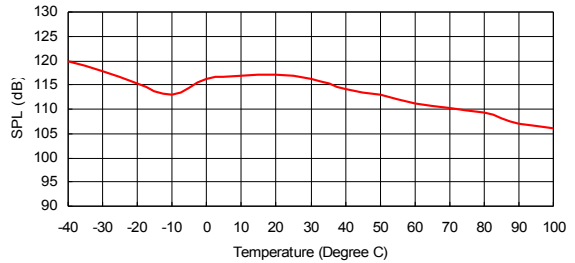

Center Frequency Shift vs. Temperature

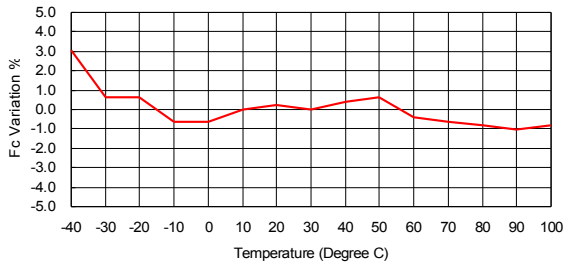

Center Frequency Shift vs. Temperature

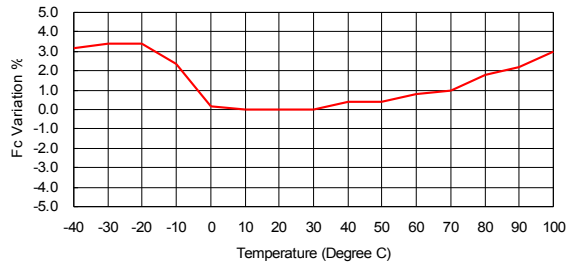




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

328SR160 Impedance —————
 328SR160 Phase - - - - -
 328ST160 Impedance —————
 328ST160 Phase - - - - -

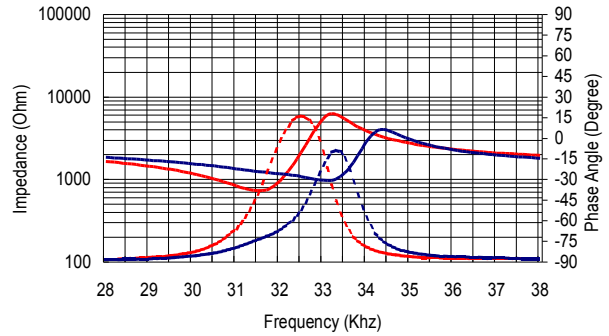


Specification

328ST160	Transmitter
328SR160	Receiver
Center Frequency	32.8±1.0KHz
Bandwidth (-6dB)	328ST160 2.0KHz
	328SR160 2.5KHz
Transmitting Sound Pressure Level at 32.8KHz; 0dB re 0.0002μbar per 10Vrms at 30cm	115dB min.
Receiving Sensitivity at 32.8KHz 0dB = 1 volt/μbar	-67dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	100° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

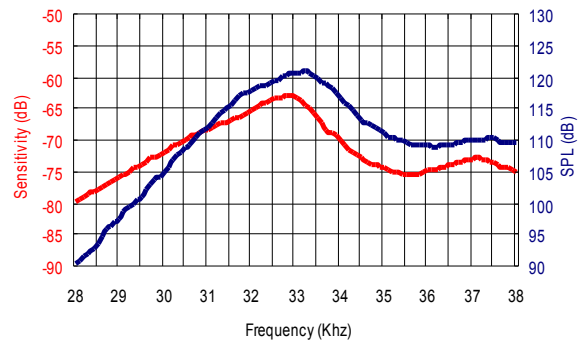

Beam Angle


Tested at 32.8KHz frequency

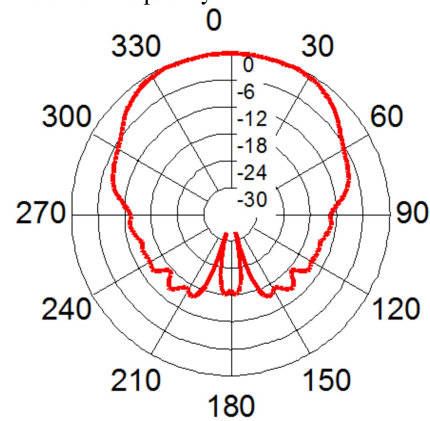

Model available:

1	328ST/R160	Aluminum Housing
---	------------	------------------

Dimensions: dimensions are in mm

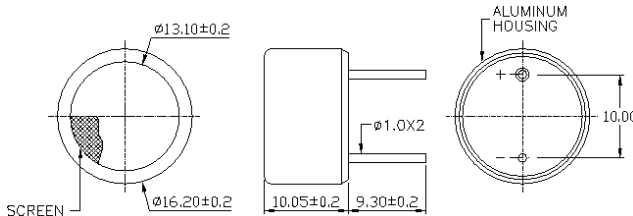


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


328SR160 Receiver

Sensitivity Variation vs. Loaded Resistor

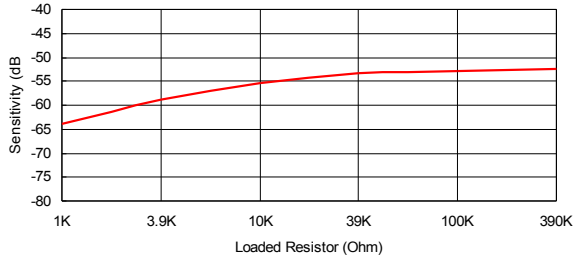


328ST160 Transmitter


SPL Variation vs. Driving Voltage

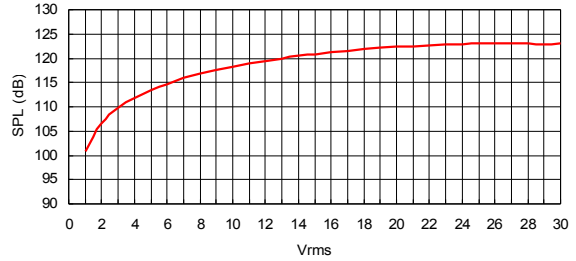


Center Frequency Shift vs. Loaded Resistor

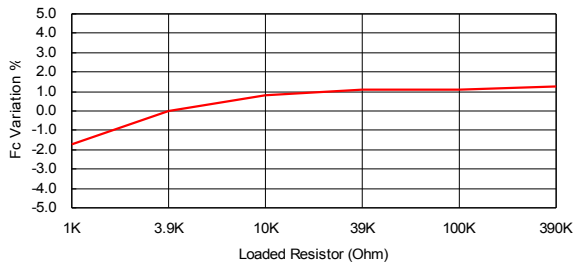


Center Frequency Shift vs. Driving Voltage

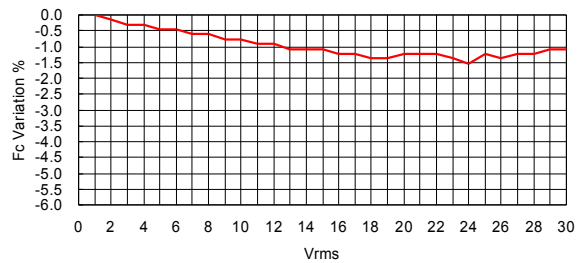


Sensitivity Variation vs. Temperature

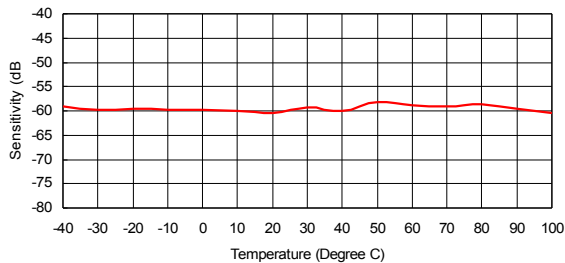


SPL Variation vs. Temperature

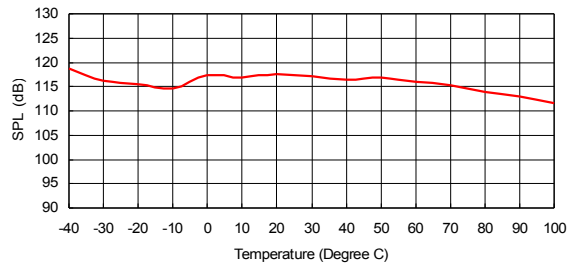

Center Frequency Shift vs. Temperature

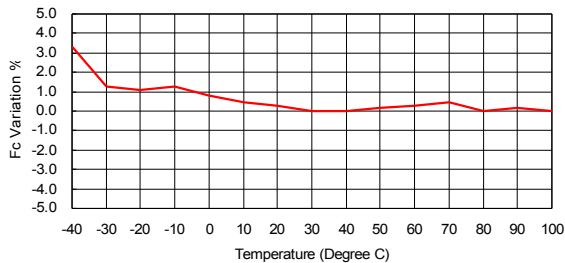

Center Frequency Shift vs. Temperature

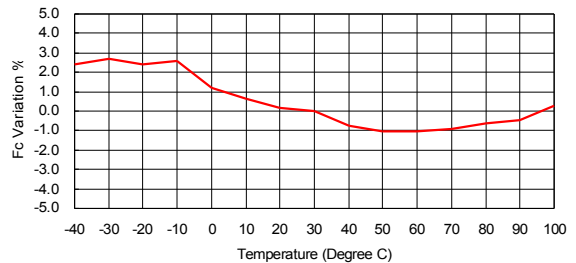




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

- 328SR180 Impedance —————
- 328SR180 Phase - - - - -
- 328ST180 Impedance —————
- 328ST180 Phase - - - - -

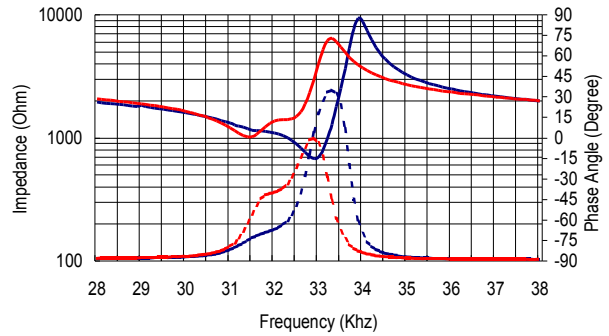


Specification

328ST180	Transmitter
328SR180	Receiver
Center Frequency	32.8±1.0KHz
Bandwidth (-6dB)	328ST180 2KHz
	328SR180 2KHz
Transmitting Sound Pressure Level at 32.8KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	117dB min.
Receiving Sensitivity at 32.8KHz 0dB = 1 volt/µbar	-64dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	45° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

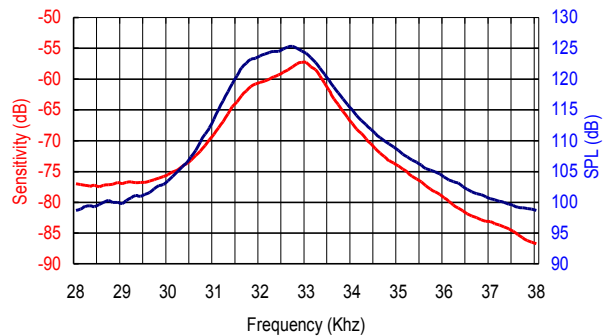

Model available:


1	328ST/R180	Aluminum Housing
2	328ST/R18B	Black Al. Housing

Dimensions: dimensions are in mm

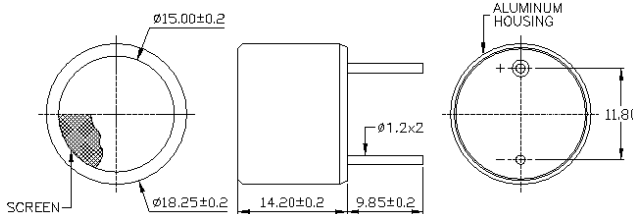

Beam Angle

Tested at 32.8KHz frequency

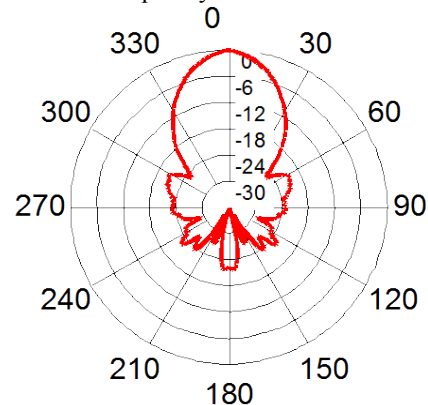


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


328SR180 Receiver

Sensitivity Variation vs. Loaded Resistor

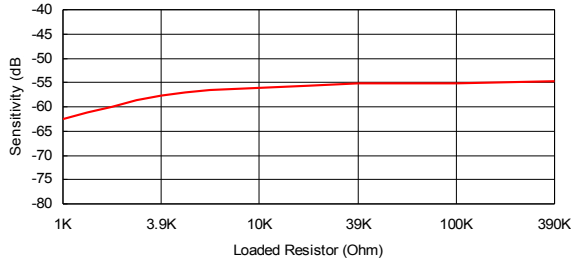


328ST180 Transmitter


SPL Variation vs. Driving Voltage

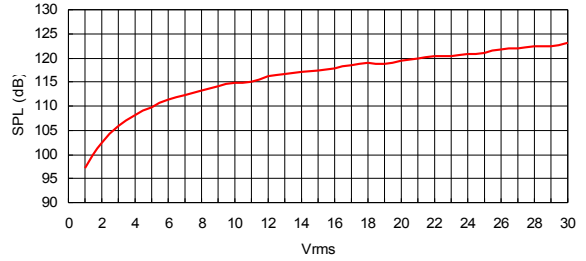


Center Frequency Shift vs. Loaded Resistor

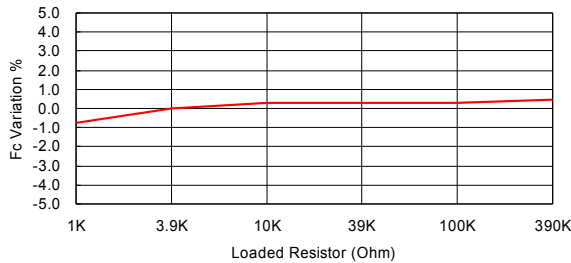


Center Frequency Shift vs. Driving Voltage

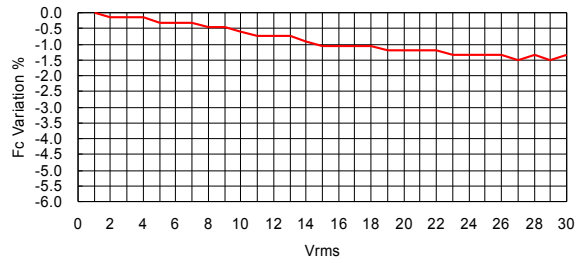


Sensitivity Variation vs. Temperature

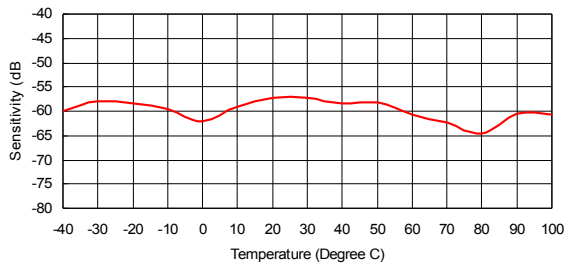


SPL Variation vs. Temperature

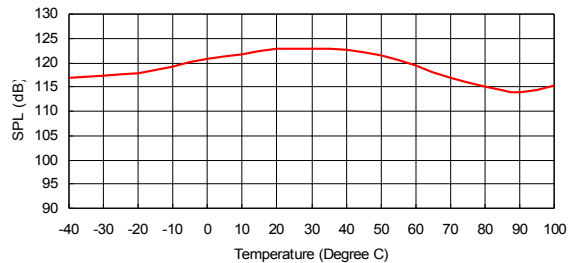

Center Frequency Shift vs. Temperature

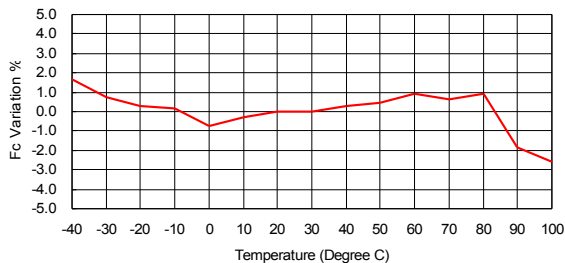

Center Frequency Shift vs. Temperature

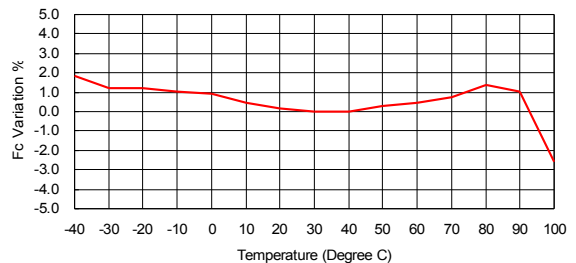




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

400SR100 Impedance —————
 400SR100 Phase - - - - -
 400ST100 Impedance —————
 400ST100 Phase - - - - -

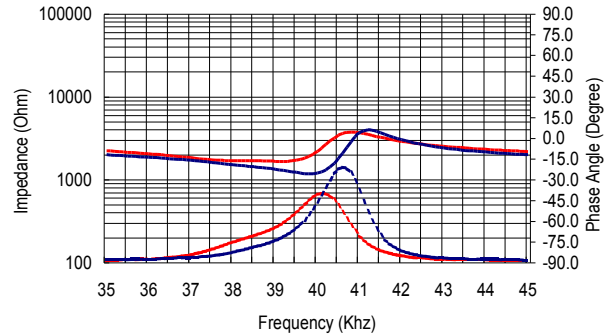


Specification

400ST100	Transmitter
400SR100	Receiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400ST100 2.5KHz
	400SR100 3.0KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	112dB min.
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/µbar	-67dB min.
Capacitance at 1KHz	±20% 1900 pF
Max. Driving Voltage (cont.)	10Vrms
Total Beam Angle	-6dB 72° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

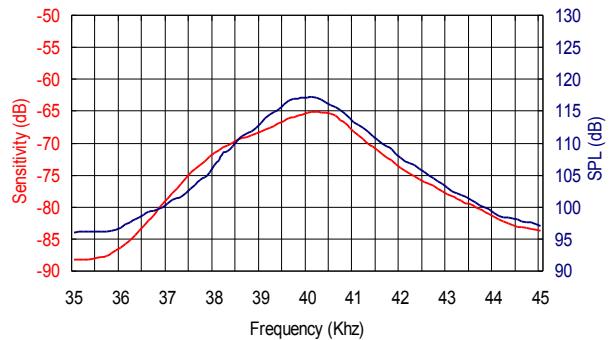


Model available:


1	400ST/R100	Aluminum Housing
2	400ST/R10B	Black Al. Housing
3	400ST/R10P	Plastic Housing

Beam Angle

Tested at 40.0KHz frequency

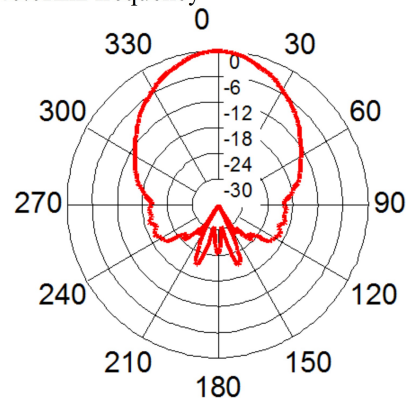

Dimensions: Dimensions are in mm

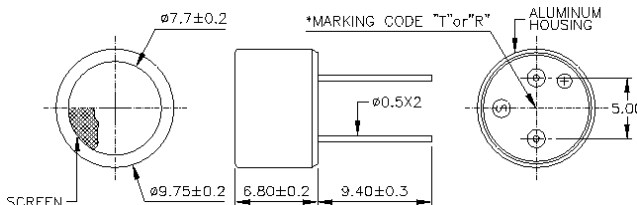


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


400SR100 Receiver

Sensitivity Variation vs. Loaded Resistor

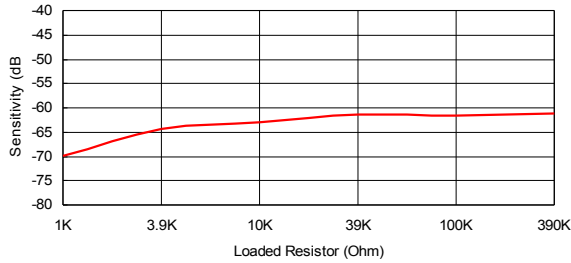


400ST100 Transmitter


SPL Variation vs. Driving Voltage

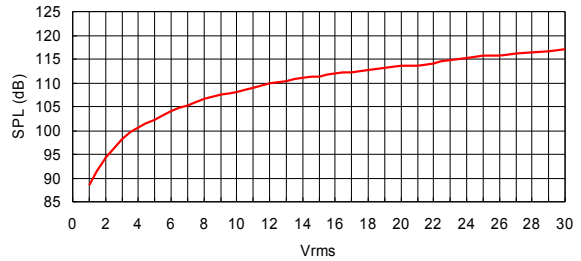


Center Frequency Shift vs. Loaded Resistor

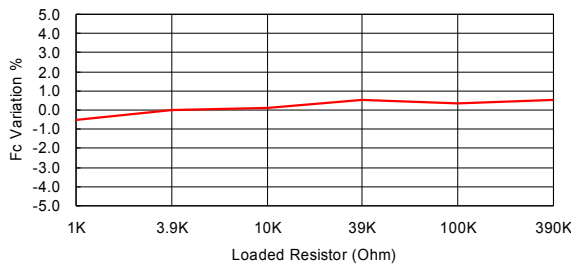


Center Frequency Shift vs. Driving Voltage

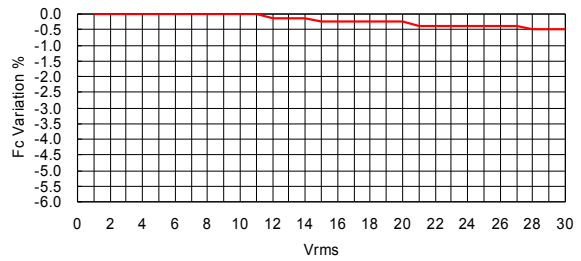


Sensitivity Variation vs. Temperature

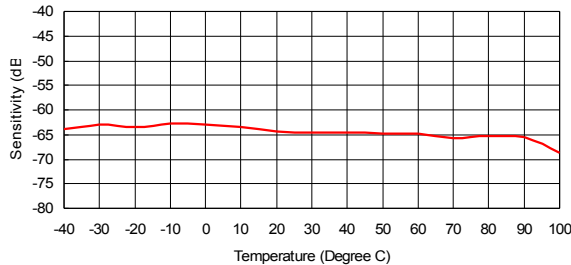


SPL Variation vs. Temperature

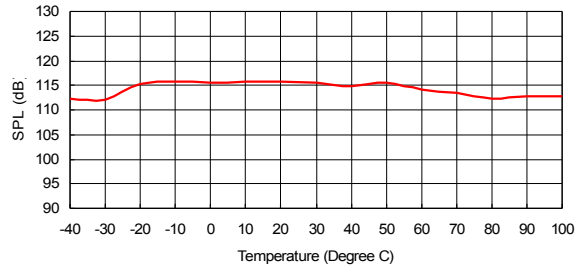

Center Frequency Shift vs. Temperature

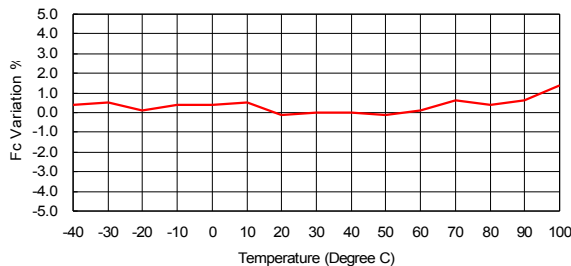

Center Frequency Shift vs. Temperature

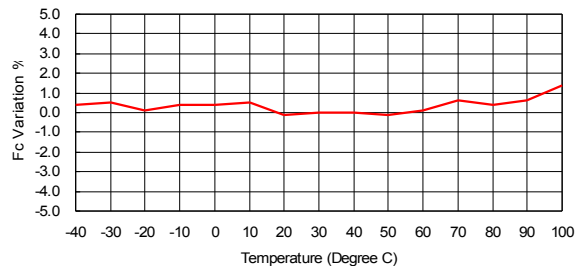




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

400SR120 Impedance ————
 400SR120 Phase - - - - -
 400ST120 Impedance ————
 400ST120 Phase - - - - -

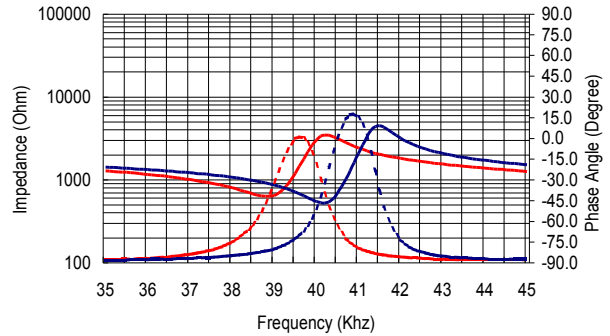


Specification

400ST120	Transmitter
400SR120	Receiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400ST120 2.0KHz 400SR120 2.0KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	115dB min.
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/µbar	-67dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	85° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

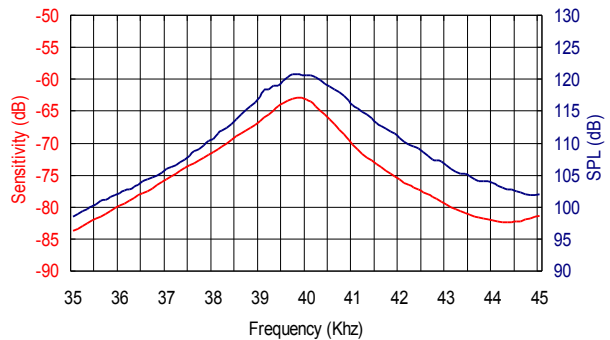

Model available:


1	400ST/R120	Aluminum Housing
2	400ST/R12B	Black Al. Housing

Dimensions: dimensions are in mm

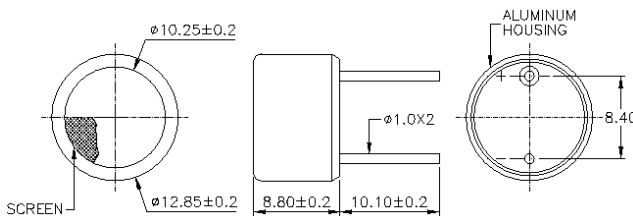

Beam Angle

Tested at 40.0KHz frequency

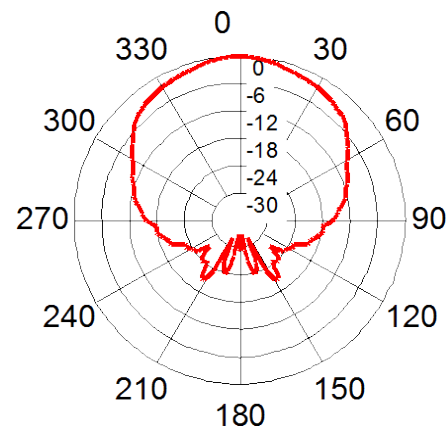


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


400SR120 Receiver

Sensitivity Variation vs. Loaded Resistor

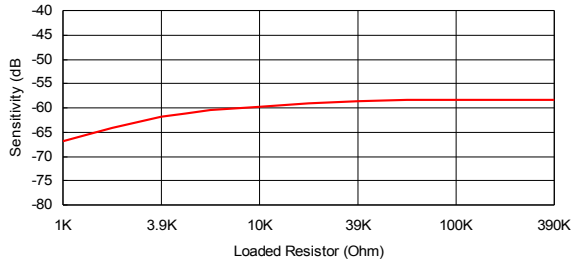


400ST120 Transmitter


SPL Variation vs. Driving Voltage

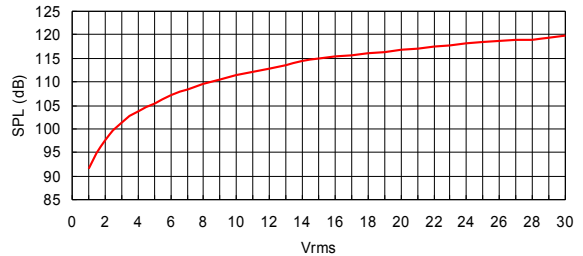


Center Frequency Shift vs. Loaded Resistor

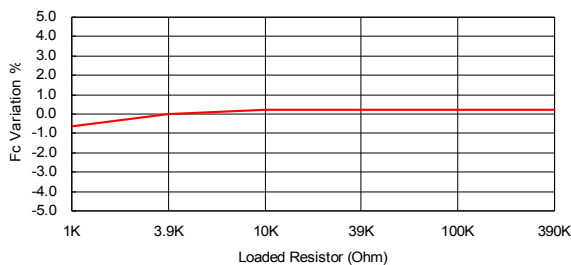


Center Frequency Shift vs. Driving Voltage

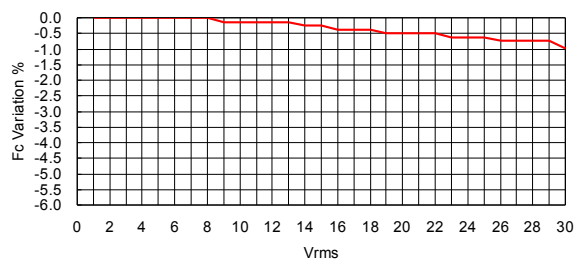


Sensitivity Variation vs. Temperature

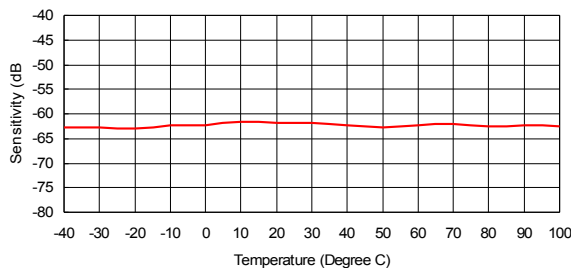


SPL Variation vs. Temperature

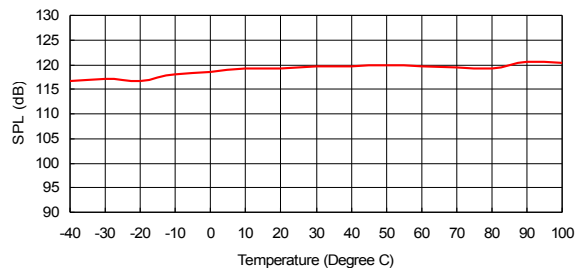

Center Frequency Shift vs. Temperature

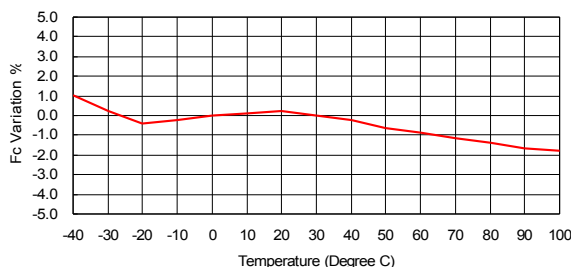

Center Frequency Shift vs. Temperature

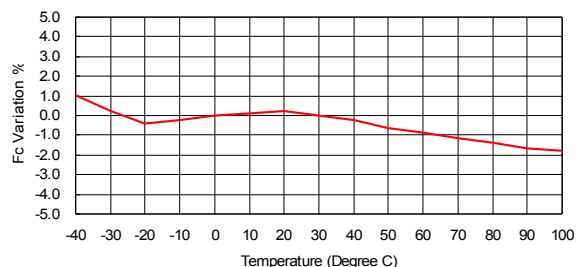




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

400SR160 Impedance ————
 400SR160 Phase - - - - -
 400ST160 Impedance ————
 400ST160 Phase - - - - -

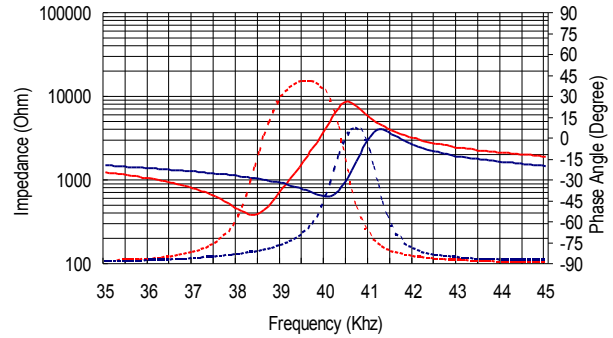

Specification


400ST160	Transmitter
400SR160	Receiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400ST160: 2.0KHz 400SR160: 2.5KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	120dB min.
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/µbar	-61dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	55° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Models available:


1	400ST/R160	Aluminum Housing
2	400ST/R16B	Black Al. Housing
3	400ST/R16P	Plastic Housing

Dimensions: dimensions are in mm

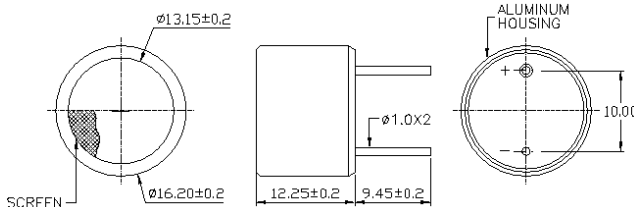


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

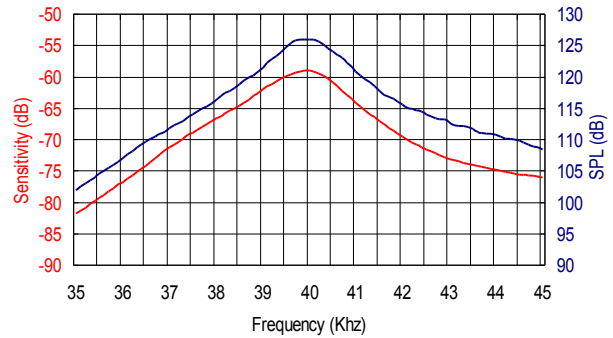

Beam Angle

Tested at 40.0KHz frequency

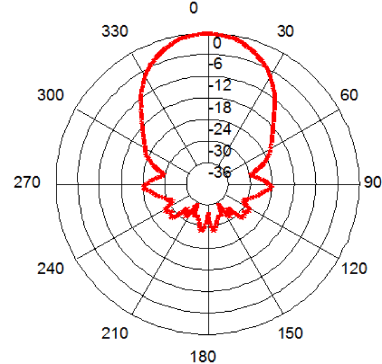


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


400SR160 Receiver

Sensitivity Variation vs. Loaded Resistor

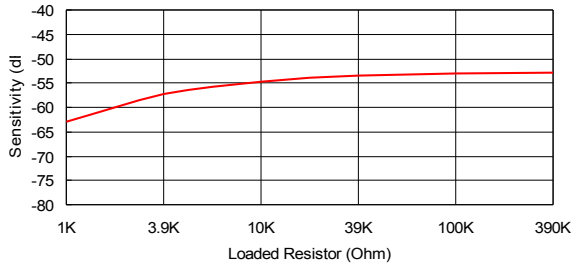


400ST160 Transmitter


SPL Variation vs. Driving Voltage

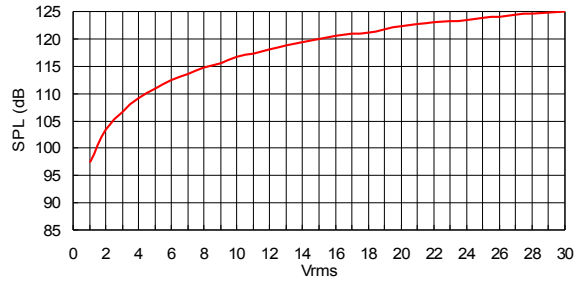


Center Frequency Shift vs. Loaded Resistor

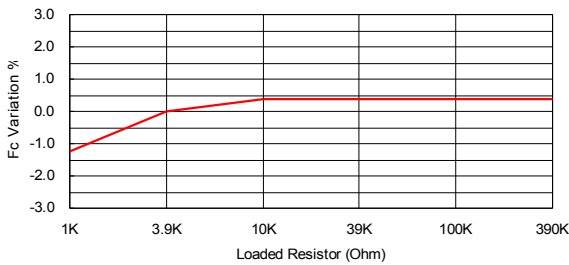


Center Frequency Shift vs. Driving Voltage

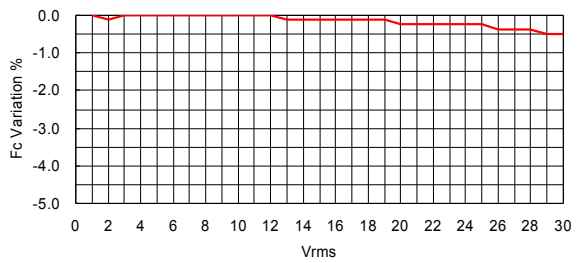


Sensitivity Variation vs. Temperature

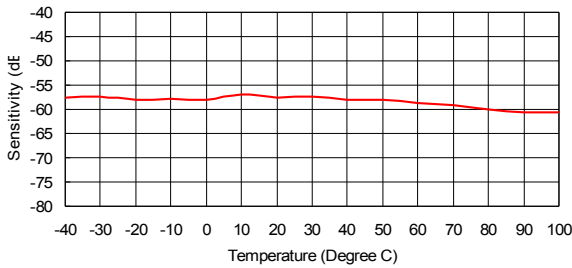


SPL Variation vs. Temperature

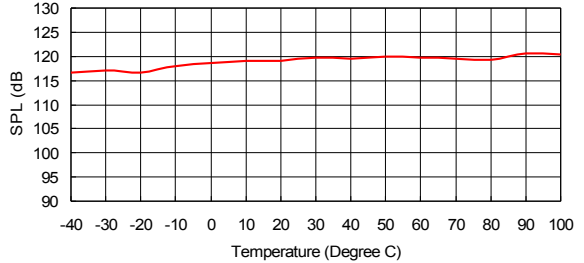

Center Frequency Shift vs. Temperature

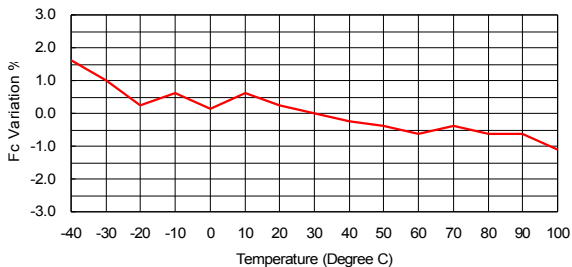

Center Frequency Shift vs. Temperature

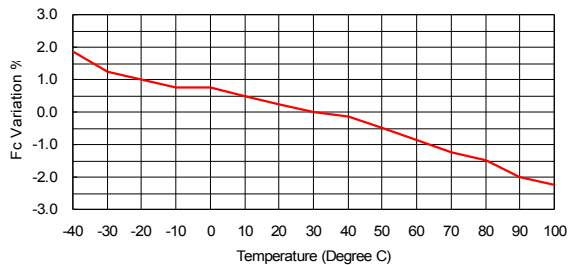




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

Receiver Impedance —————
 Receiver Phase - - - - -
 Transmitter Impedance —————
 Transmitter Phase - - - - -

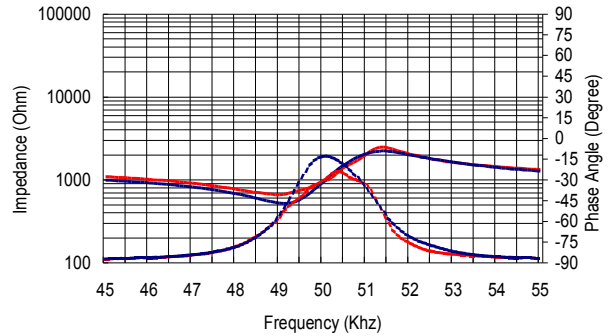


Specification

500MB120	Dual Transducer
Center Frequency	50.0±1.0KHz
Bandwidth (-6dB)	3KHz
Transmitting Sound Pressure Level at 50.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	113dB min.
Receiving Sensitivity at 50.0KHz 0dB = 1 volt/µbar	-67dB min.
Sensitivity/Cross Talk Ratio	15 dB
Nominal Impedance (Trans.)	800 Ohm
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	30° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

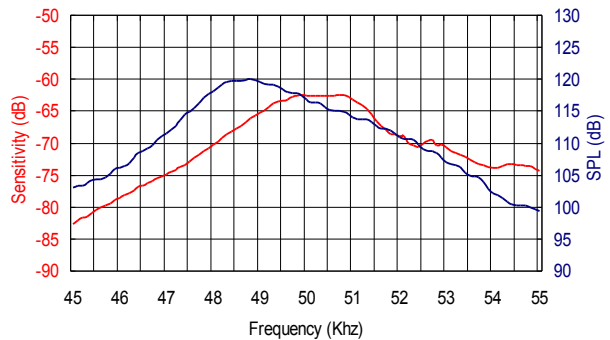


Beam Angle

Tested at 50.0KHz frequency

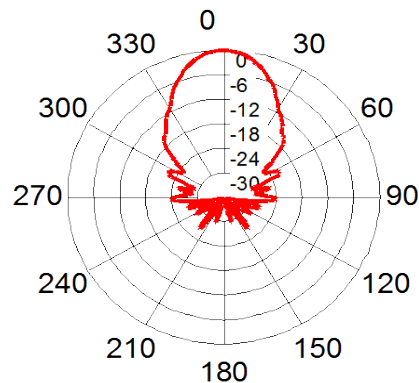

Dimensions: dimensions are in mm

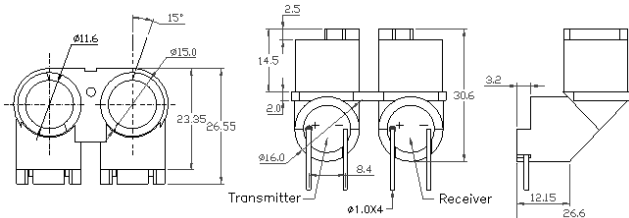

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105



Specification


250ET250	Transmitter
250ER250	Receiver
Center Frequency	25.0±1.0KHz
Bandwidth (-6dB)	250ET250 1.0KHz 250ER250 1.0KHz
Transmitting Sound Pressure Level at 25.0KHz; 0dB re 0.0002μbar per 10Vrms at 30cm	113dB min.
Receiving Sensitivity at 25.0KHz 0dB = 1 volt/μbar	-63dB min.
Capacitance at 1KHz	±20% 2400 pF
Max. Driving Voltage (cont.)	15Vrms
Total Beam Angle	-6dB 40° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Model available:

1	250ET/R250	Aluminum Housing
---	------------	------------------


Dimensions: dimensions are in mm

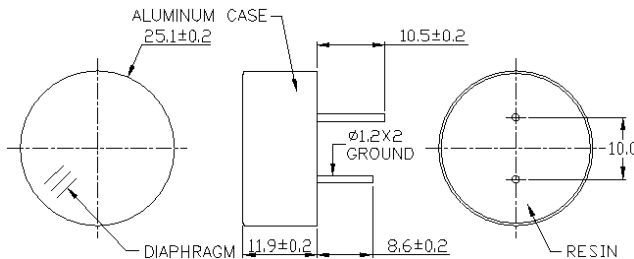

Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

250ER250 Impedance (Red solid line)
 250ER250 Phase (Red dashed line)
 250ET250 Impedance (Blue solid line)
 250ET250 Phase (Blue dashed line)

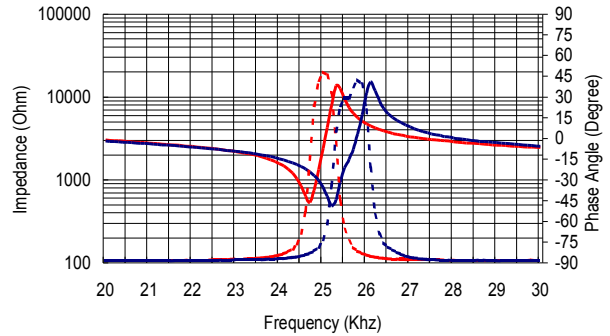


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

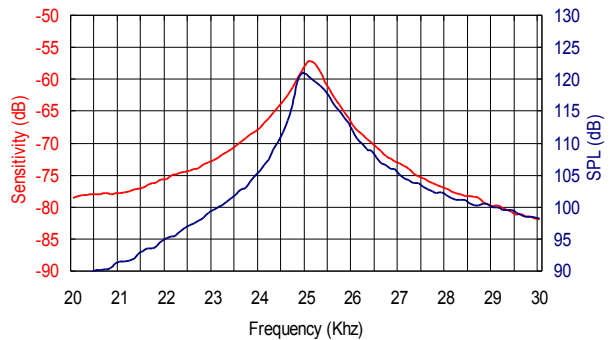

Beam Angle

Tested at 25.0KHz frequency

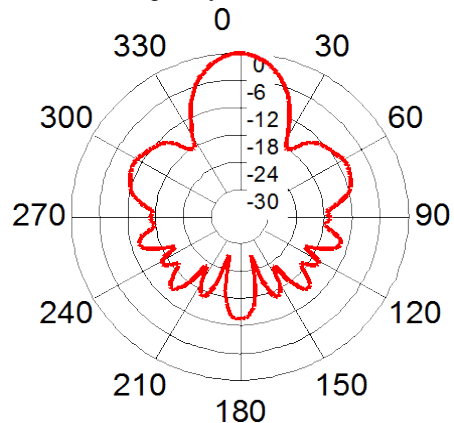


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


250ER250 Receiver

Sensitivity Variation vs. Loaded Resistor

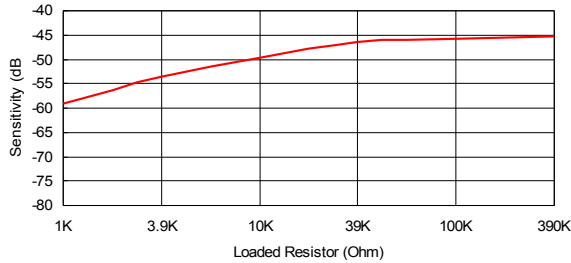


250ET250 Transmitter


SPL Variation vs. Driving Voltage

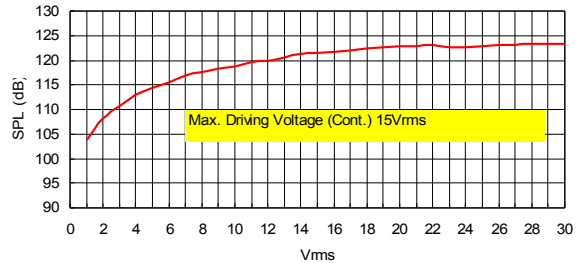


Center Frequency Shift vs. Loaded Resistor

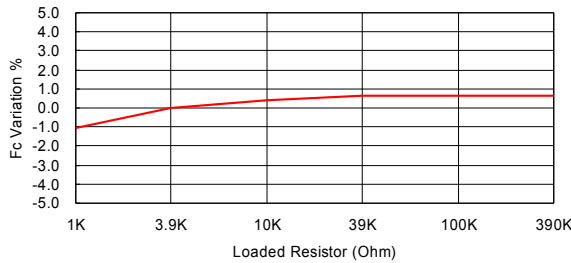


Center Frequency Shift vs. Driving Voltage

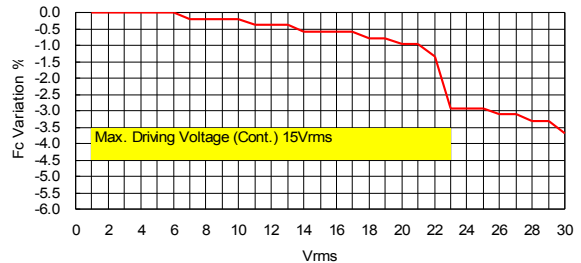


Sensitivity Variation vs. Temperature

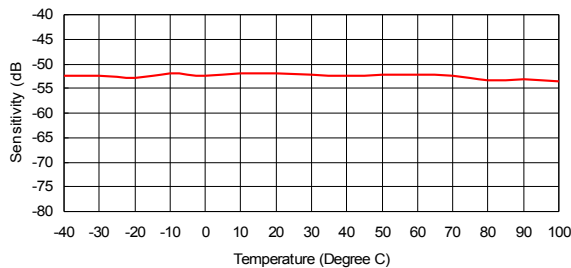


SPL Variation vs. Temperature

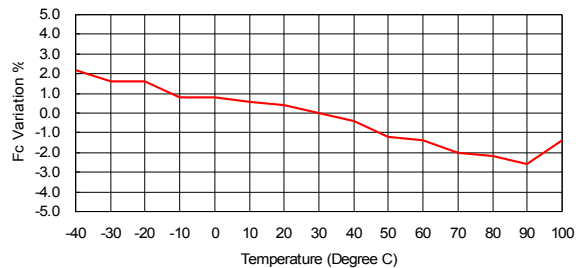


Center Frequency Shift vs. Temperature

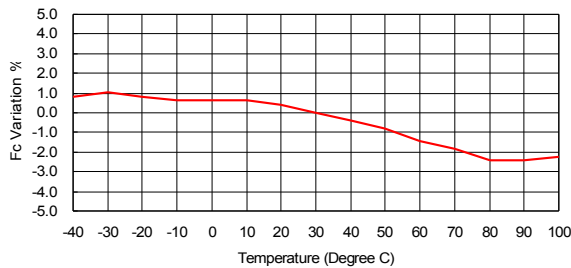

Center Frequency Shift vs. Temperature

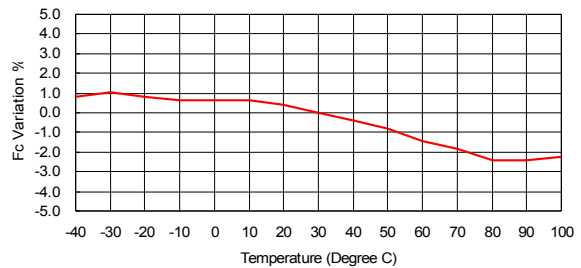


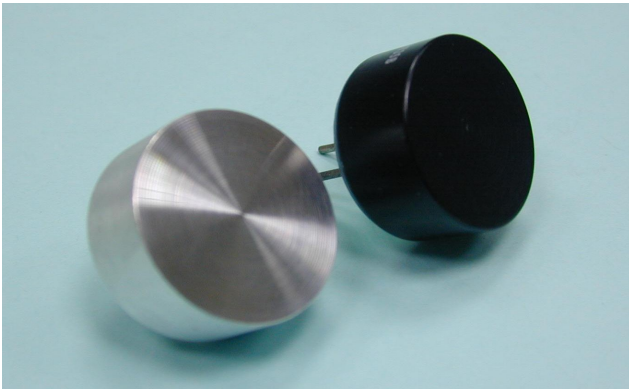

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

328ER250 Impedance —————
 328ER250 Phase - - - - -
 328ET250 Impedance —————
 328ET250 Phase - - - - -

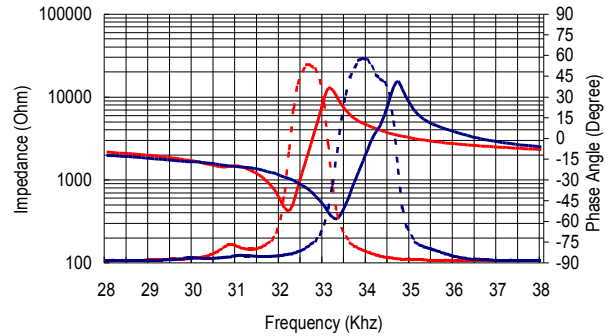


Specification

328ET250	Transmitter
328ER250	Receiver
Center Frequency	32.8±1.0KHz
Bandwidth (-6dB)	328ET250 1.0KHz 328ER250 1.0KHz
Transmitting Sound Pressure Level at 32.8KHz; 0dB re 0.0002μbar per 10Vrms at 30cm	113dB min. 107dB min. SUS 316
Receiving Sensitivity at 32.8KHz 0dB = 1 volt/μbar	-67dB min. -70dB min. SUS 316
Capacitance at 1KHz	±20% 2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle	-6dB 33° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

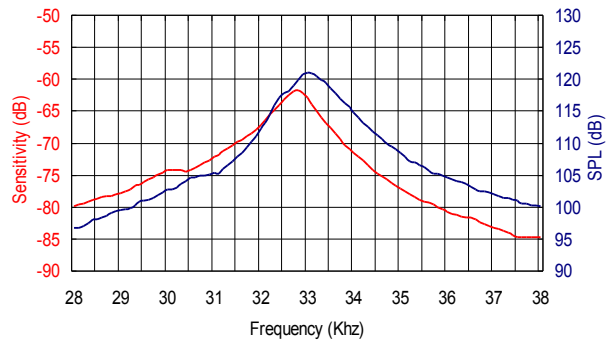

Model available:


1	328ET/R250	Aluminum Housing
2	328ET/R250B	Black Alum. Housing
3	328ET/R250S	SUS 316 Housing

Dimensions: dimensions are in mm

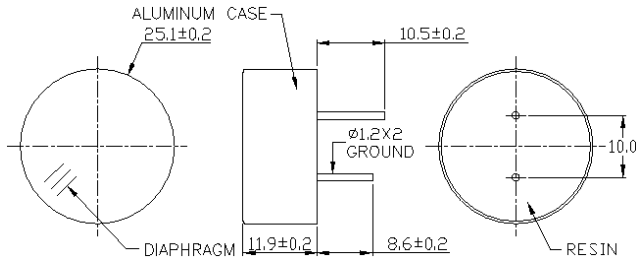


Beam Angle

Tested at 32.8KHz frequency

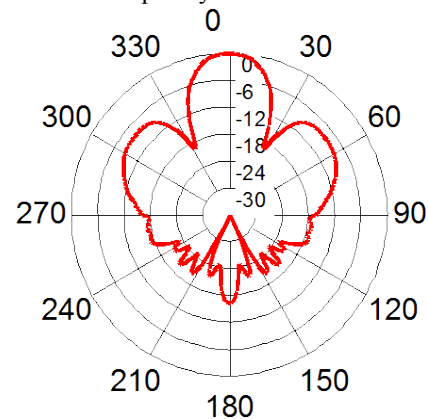


328ER250 Receiver

Sensitivity Variation vs. Loaded Resistor

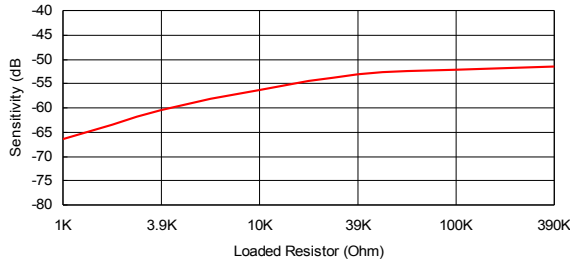


328ET250 Transmitter


SPL Variation vs. Driving Voltage

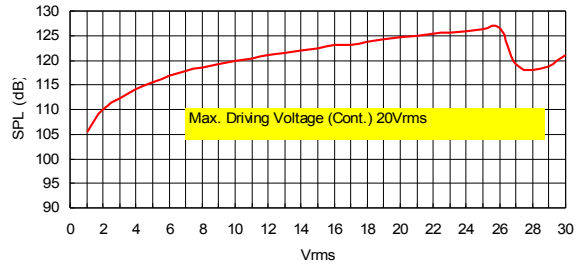


Center Frequency Shift vs. Loaded Resistor

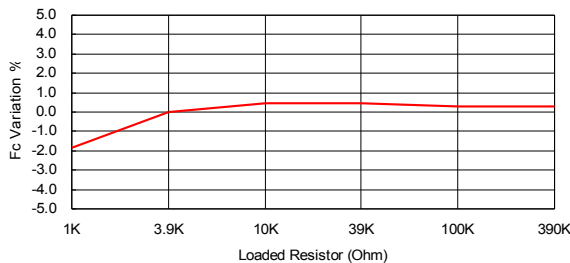


Center Frequency Shift vs. Driving Voltage

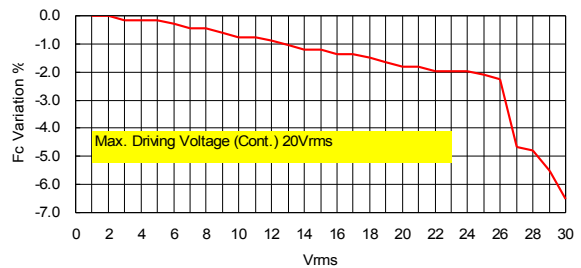


Sensitivity Variation vs. Temperature

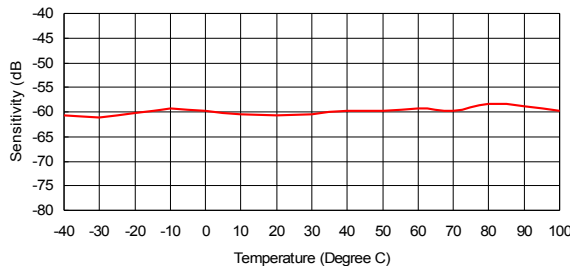


SPL Variation vs. Temperature

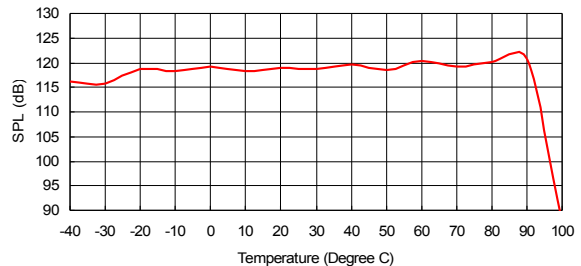


Center Frequency Shift vs. Temperature

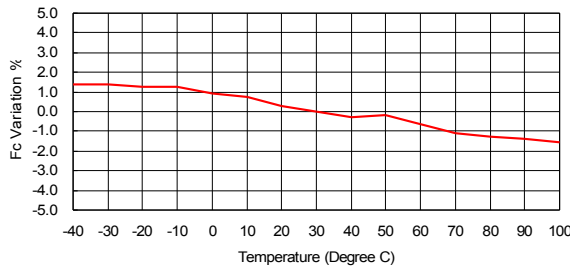

Center Frequency Shift vs. Temperature

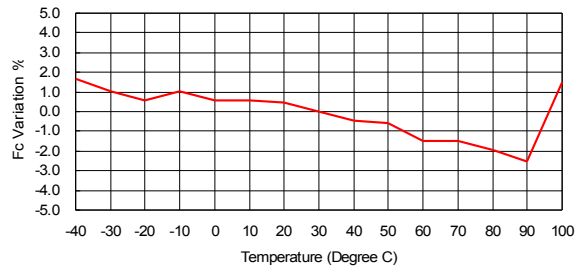


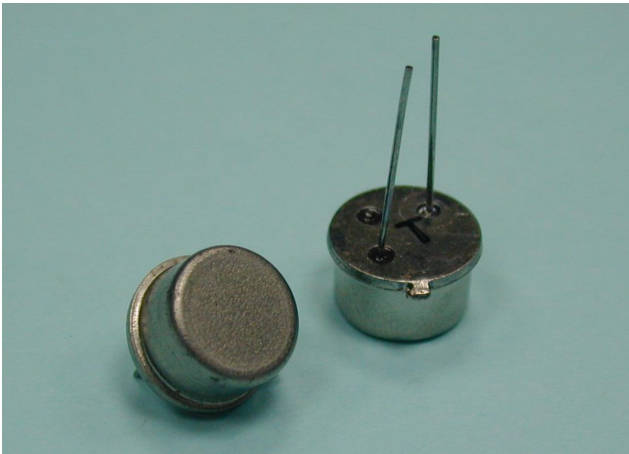

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

400ER080 Impedance ——— (Red solid line)
 400ER080 Phase - - - - - (Red dashed line)
 400ET080 Impedance ——— (Blue solid line)
 400ET080 Phase - - - - - (Blue dashed line)

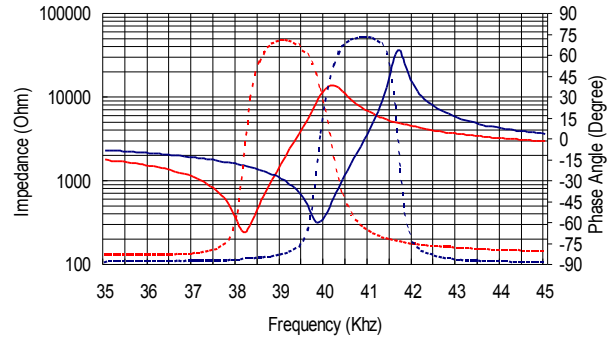

Specification


400ET080	Transmitter
400ER080	Receiver
Center Frequency	40.0±3.0KHz
Bandwidth (-6dB)	400ET080 1.5KHz 400ER080 2.0KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	100dB min.
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/µbar	-80dB min.
Capacitance at 1KHz ±20%	1700 pF
Max. Driving Voltage (cont.)	15Vrms
Total Beam Angle -6dB	125° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Model available:


1	400ET/R080	Nickel Plated Steel Housing
---	------------	-----------------------------

Dimensions: dimensions are in mm

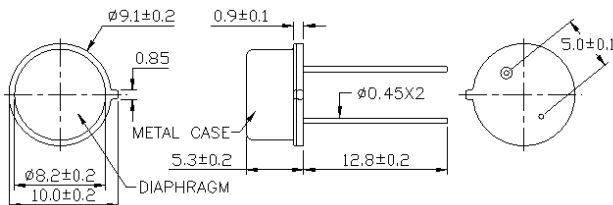


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

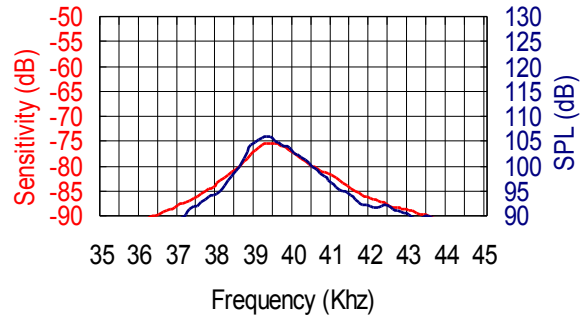

Beam Angle

Tested at 40.0KHz frequency

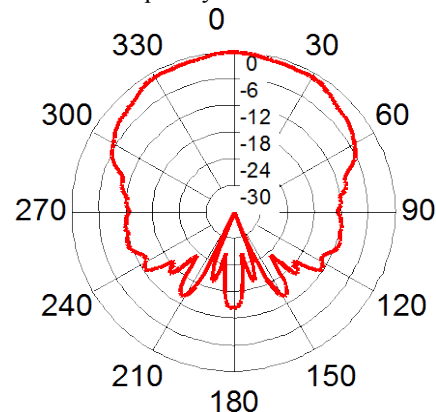


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


400ER080 Receiver

Sensitivity Variation vs. Loaded Resistor

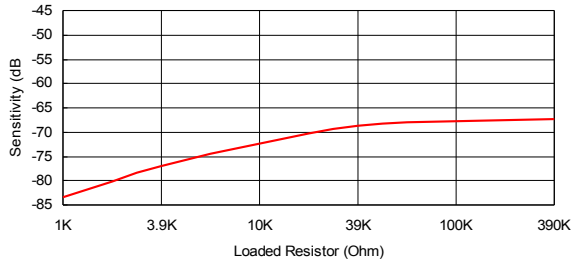


400ET080 Transmitter


SPL Variation vs. Driving Voltage

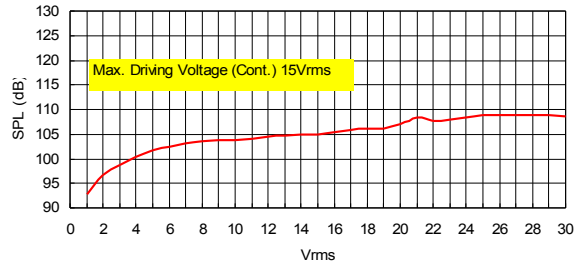


Center Frequency Shift vs. Loaded Resistor

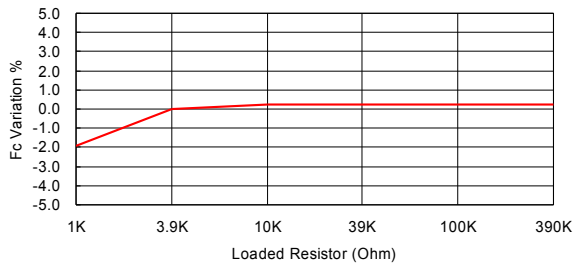


Center Frequency Shift vs. Driving Voltage

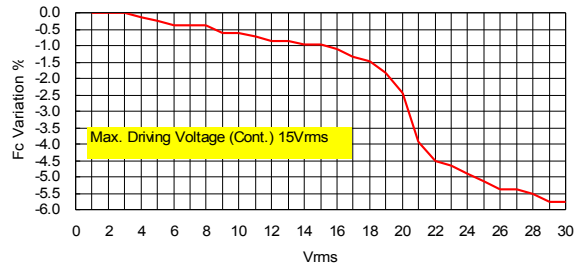


Sensitivity Variation vs. Temperature

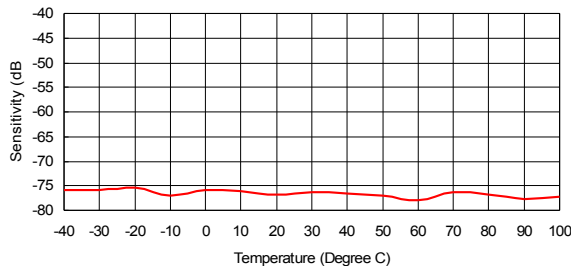


SPL Variation vs. Temperature

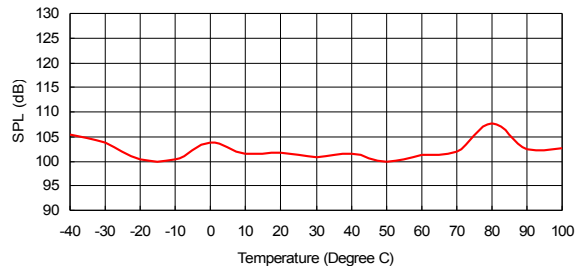

Center Frequency Shift vs. Temperature

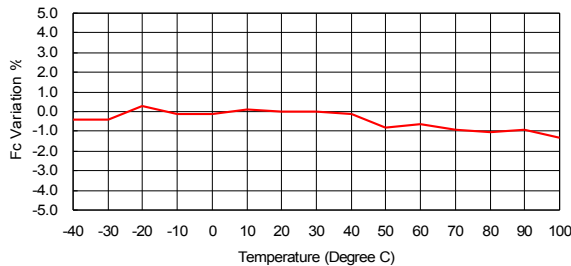

Center Frequency Shift vs. Temperature

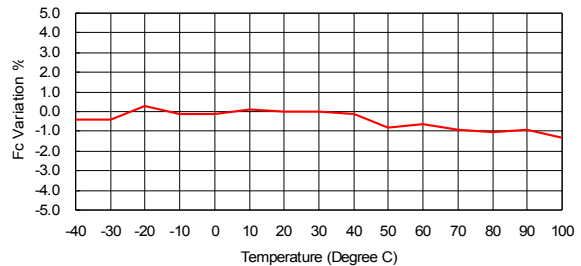




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

400ER250 Impedance ————
 400ER250 Phase - - - - -
 400ET250 Impedance ————
 400ET250 Phase - - - - -

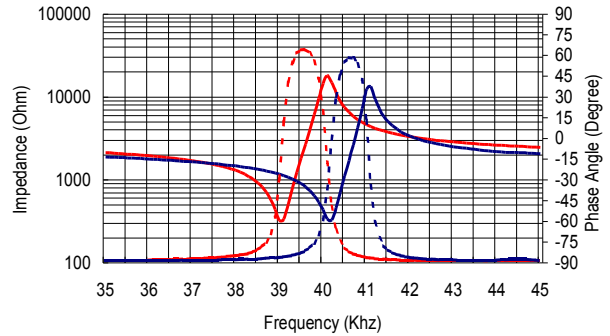


Specification

400ET250	Transmitter
400ER250	Receiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400ET250 1.0KHz 400ER250 1.0KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	115dB min. 107 dB min. for SUS316
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/µbar	-70dB min. -72 dB min. for SUS316
Capacitance at 1KHz	±20% 2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle	-6dB 30° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

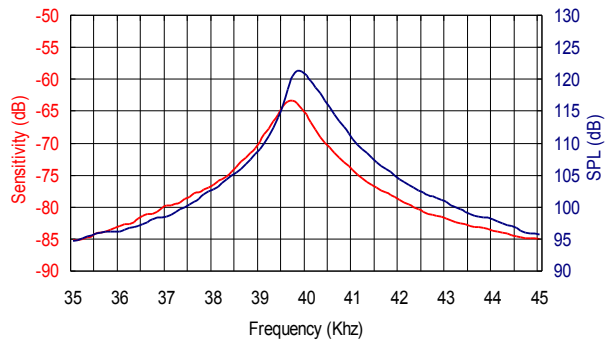

Model available:


1	400ET/R250	Aluminum Housing
2	400ET/R25B	Black Alum. Housing
3	400ET/R25S	SUS 316 Housing

Dimensions: dimensions are in mm

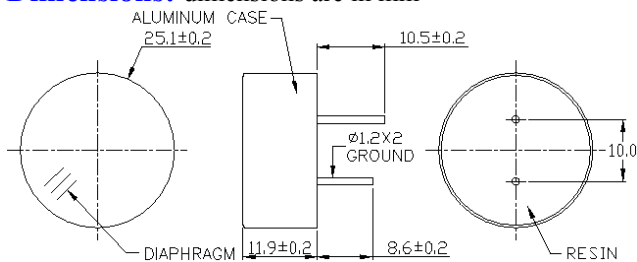


Beam Angle

Tested at 40.0KHz frequency

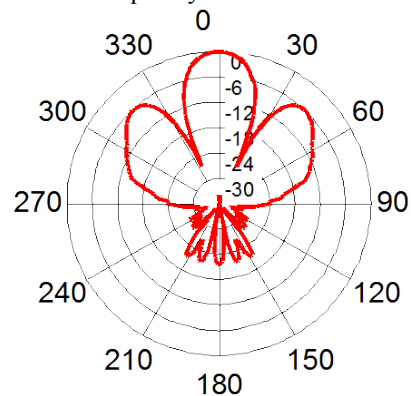


400ER250 Receiver

Sensitivity Variation vs. Loaded Resistor

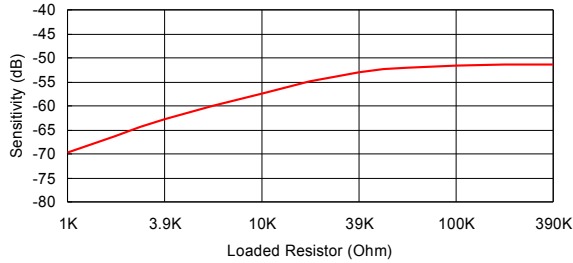


400ET250 Transmitter


SPL Variation vs. Driving Voltage

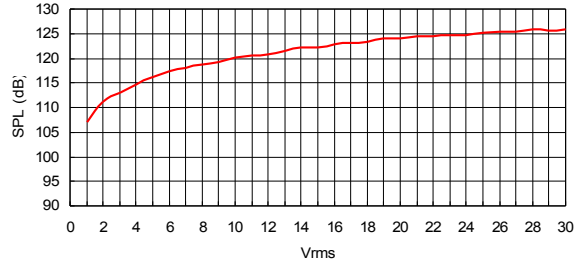


Center Frequency Shift vs. Loaded Resistor

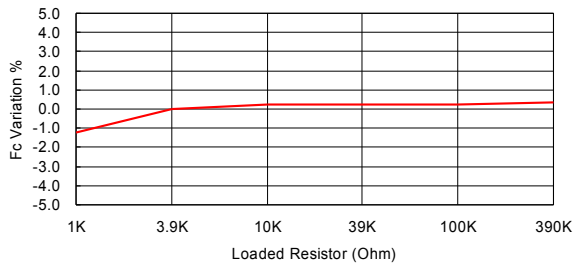


Center Frequency Shift vs. Driving Voltage

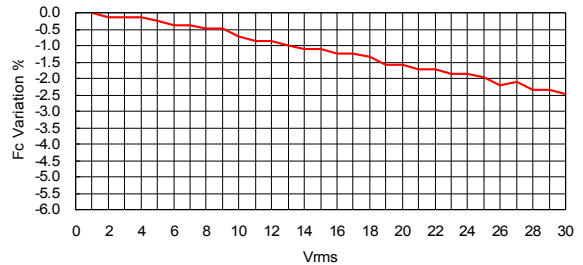


Sensitivity Variation vs. Temperature

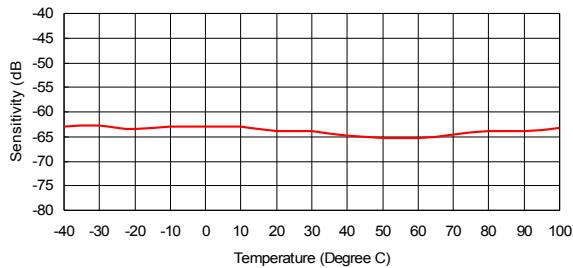


SPL Variation vs. Temperature

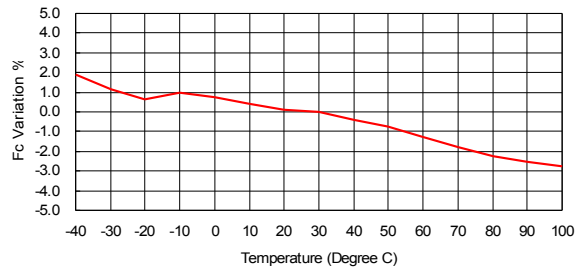

Center Frequency Shift vs. Temperature

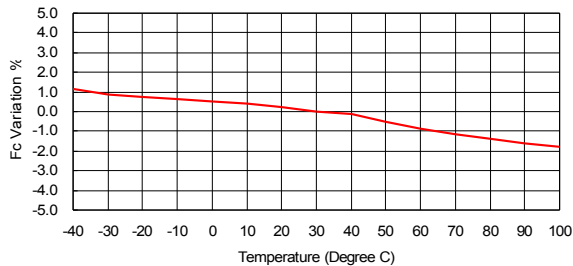

Center Frequency Shift vs. Temperature

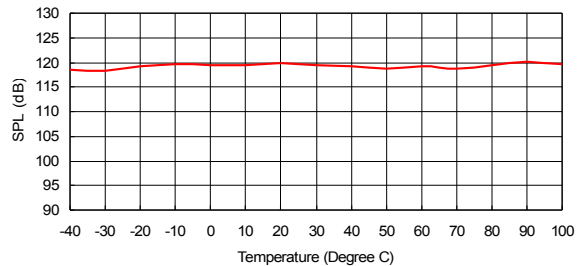




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

400ER180 Impedance ————
 400ER180 Phase - - - - -
 400ET180 Impedance ————
 400ET180 Phase - - - - -

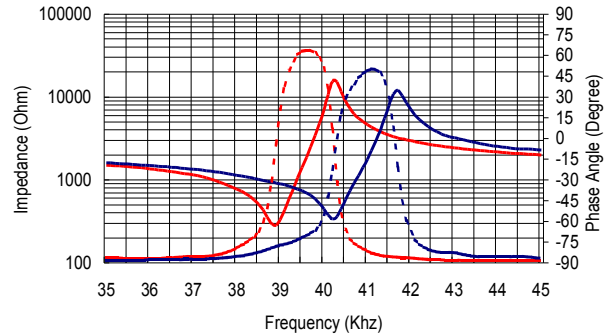

Specification

400ET180	Transmitter
400ER180	Receiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400ET180 1.5KHz 400ER180 1.5KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	115dB min.
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/µbar	-70dB min.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	15Vrms
Total Beam Angle -6dB	30° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C


All specification taken typical at 25°C
 Closer frequency tolerance can be supplied upon request.

Model available:

1	400ET/R180	Aluminum Housing
2	400ET/R18B	Black Alum. Housing


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

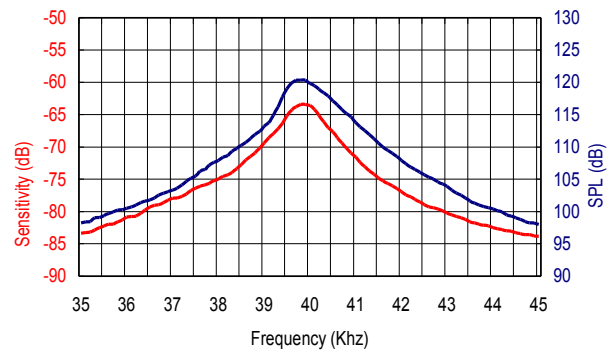


Beam Angle

Tested at 40.0KHz frequency

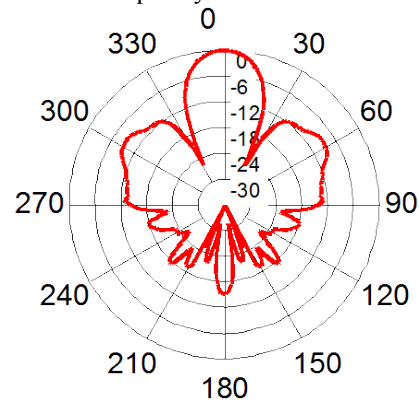

Dimensions: dimensions are in mm

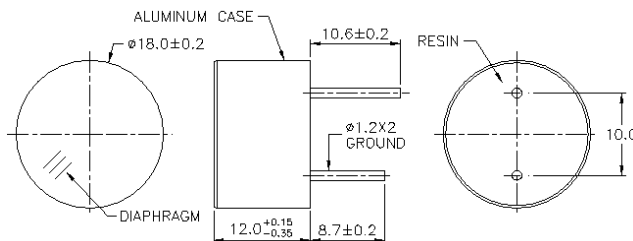


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


400ER180 Receiver

Sensitivity Variation vs. Loaded Resistor

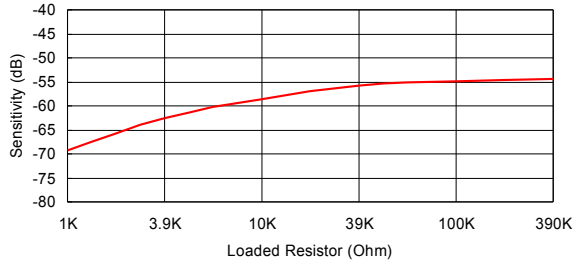


400ET180 Transmitter


SPL Variation vs. Driving Voltage

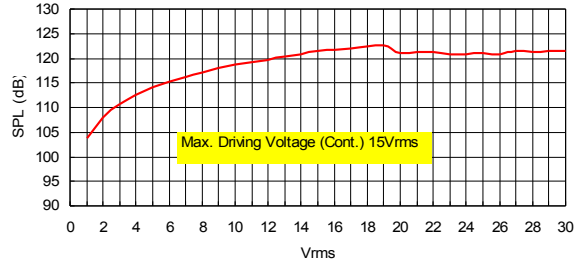


Center Frequency Shift vs. Loaded Resistor

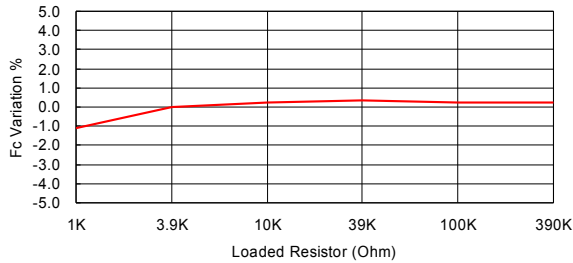


Center Frequency Shift vs. Driving Voltage

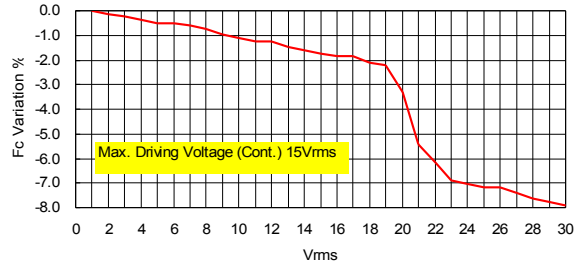


Sensitivity Variation vs. Temperature

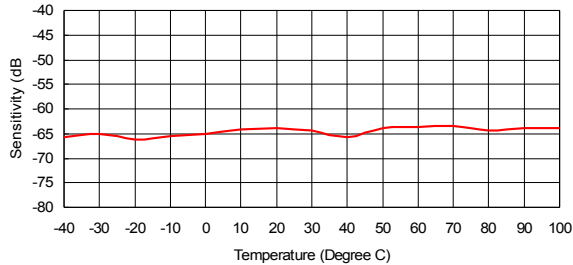


SPL Variation vs. Temperature

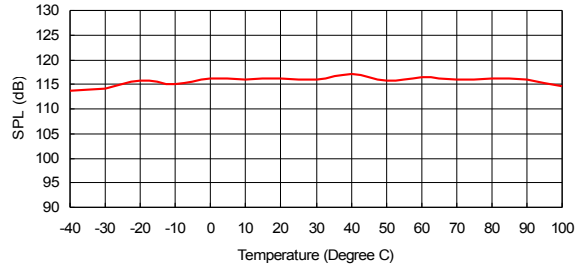

Center Frequency Shift vs. Temperature

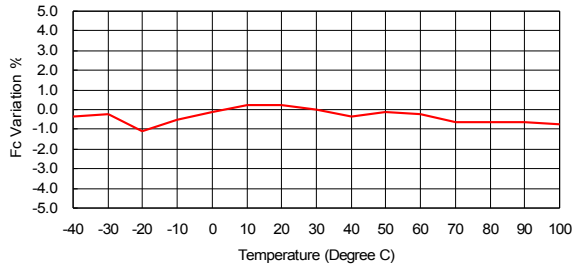


Center Frequency Shift vs. Temperature

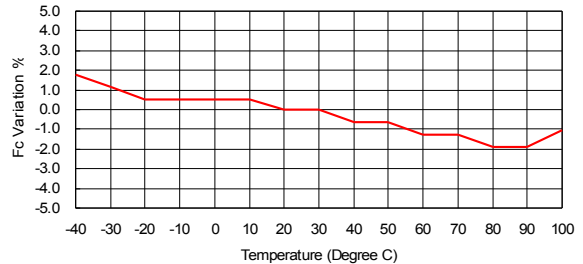




Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level
400ET18S

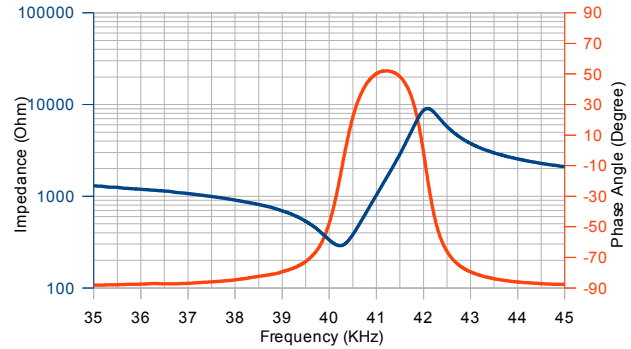

400ER18S

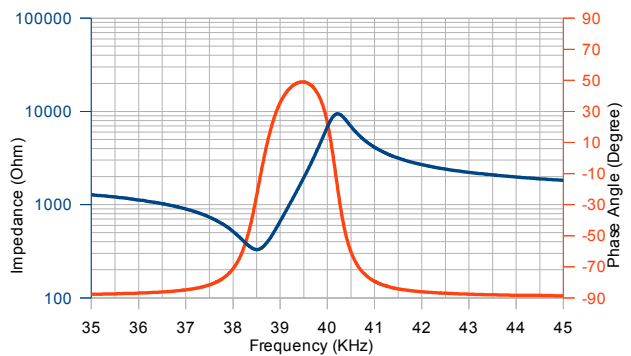

Specification

400ET18S	Transmitter
400ER18S	Receiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400ET18S 1.5KHz 400ER18S 1.5KHz
Transmitting Sound Pressure Level at 40.0KHz; 0dB re 0.0002μbar per 10Vrms at 30cm	110dB min.
Receiving Sensitivity at 40.0KHz 0dB = 1 volt/μbar	-70dB min.
Capacitance at 1KHz ±20%	2900 pF
Max. Driving Voltage (cont.)	15Vrms
Total Beam Angle (-6dB Main Beam)	35° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C


All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Model available:


1	400ET/R18S	Aluminum Housing
---	------------	------------------

Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

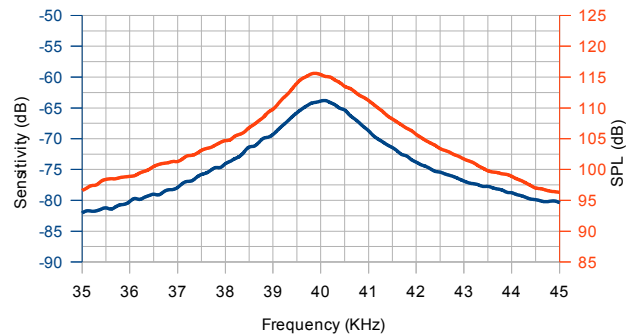

Dimensions: dimensions are in mm

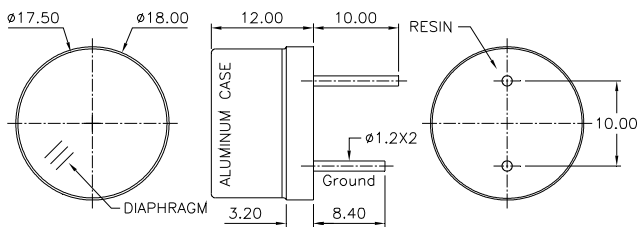

Beam Angle Tested at 40.0Khz frequency

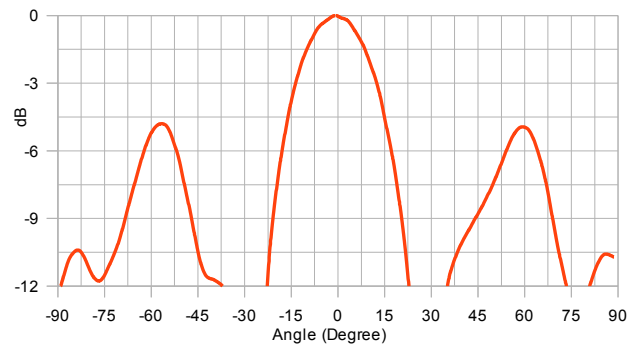


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


400ER180 Receiver

Sensitivity Variation vs. Loaded Resistor

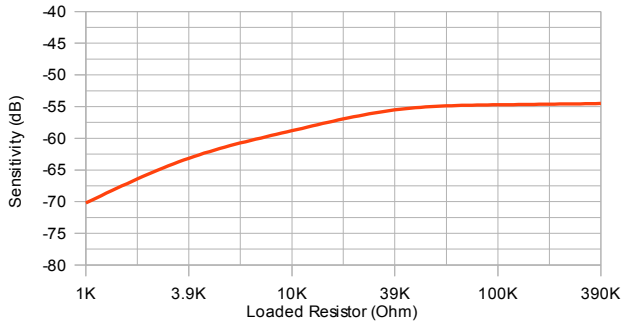


400ET180 Transmitter


SPL Variation vs. Driving Voltage

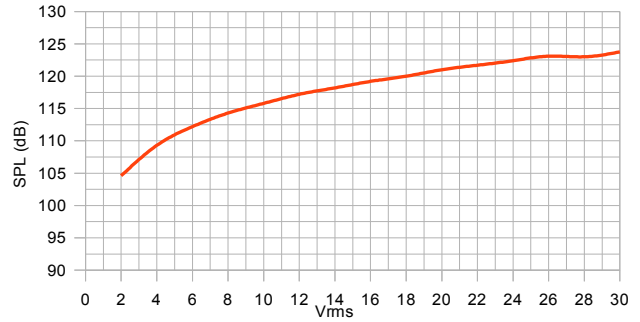


Center Frequency Shift vs. Loaded Resistor

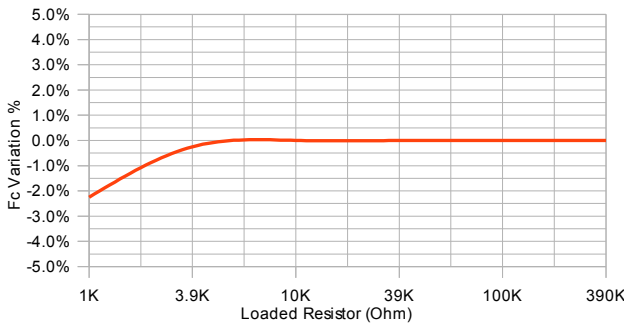


Center Frequency Shift vs. Driving Voltage

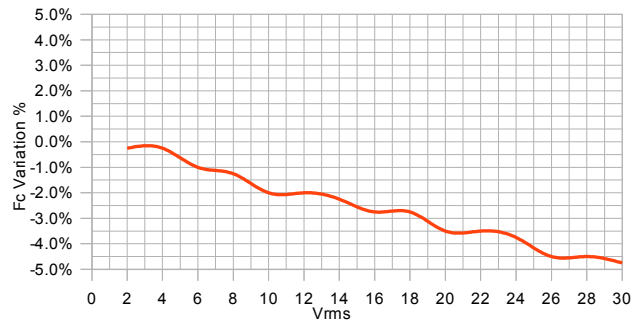


Sensitivity Variation vs. Temperature

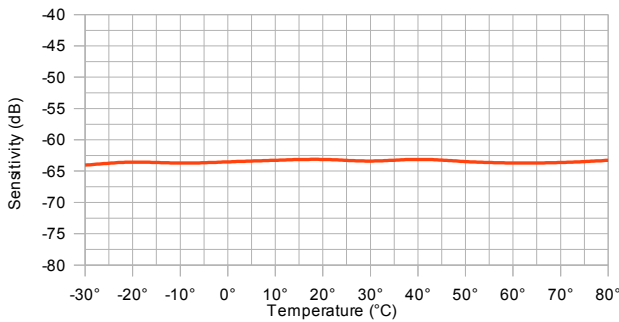


SPL Variation vs. Temperature

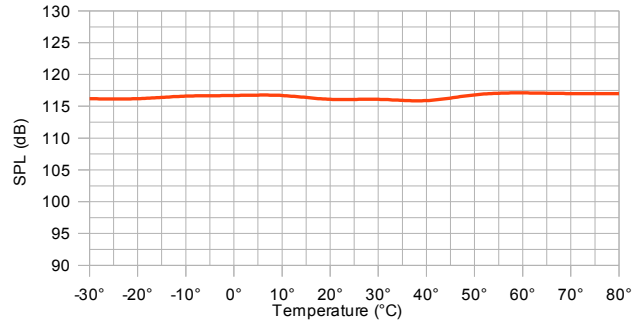

Center Frequency Shift vs. Temperature

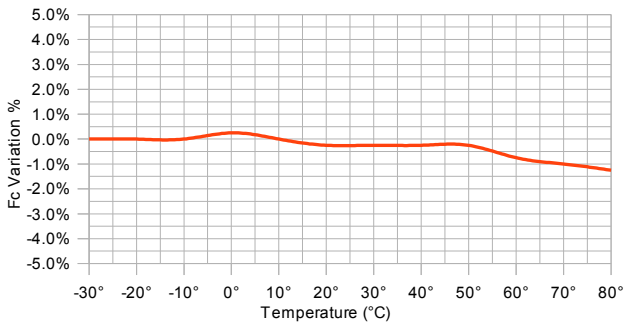


Center Frequency Shift vs. Temperature

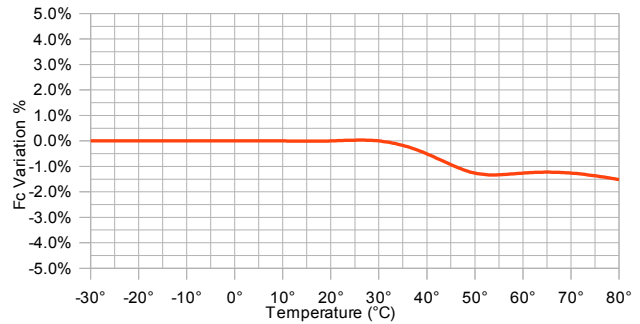



Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

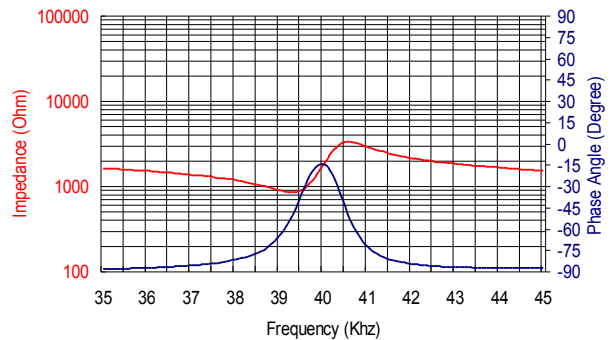

Specification


400PT120	Transceiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400PT120 2.0KHz
Transmitting Sound Pressure Level at resonant frequency ; 0dB re 0.0002μbar per 10Vrms at 30cm	115dB min.
Receiving Sensitivity at resonant frequency ; 0dB = 1 volt/μbar	-68dB min.
Nominal Impedance (Ohm)	1000
Ringing (ms)	1.2 max.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle	-6dB 85° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Closer frequency tolerance, shorter ringing and wider bandwidth models can be supplied upon request.

Model available:


1	400PT120	Aluminum Housing
2	400PT12B	Black Al. Housing
3	400PT12P	Plastic Housing

Dimensions: dimensions are in mm

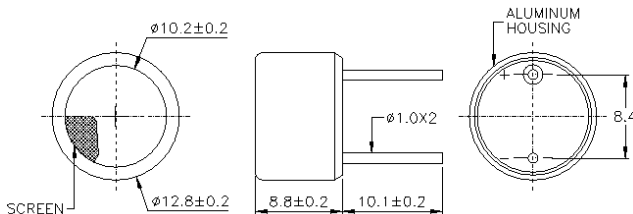


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

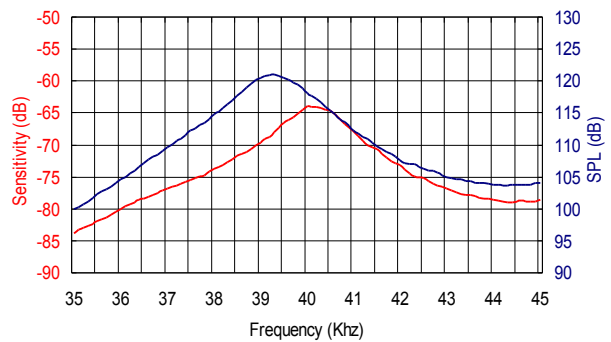

Beam Angle

Tested at 40.0KHz frequency

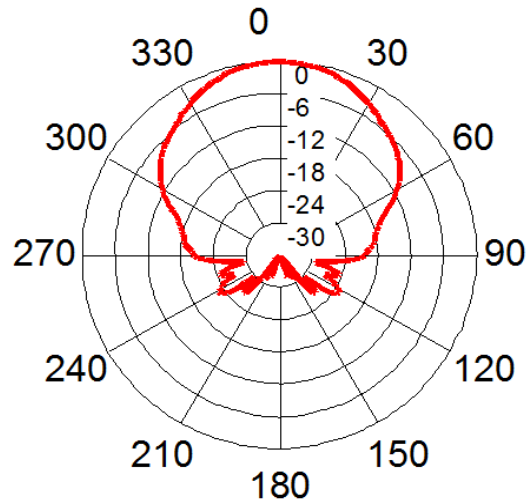


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105



Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

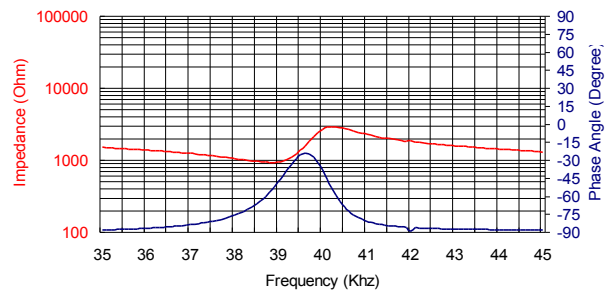

Specification


400PT160	Transceiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB) 400PT160	2.0KHz
Transmitting Sound Pressure Level at resonant frequency; 0dB re 0.0002μbar per 10Vrms at 30cm	117dB min.
Receiving Sensitivity at resonant frequency 0dB = 1 volt/μbar	-65dB min.
Nominal Impedance (Ohm)	1000
Ringng (ms) max.	1.2 – PT160 1.5 – PT16P
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle -6dB	55° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Closer frequency tolerance, shorter ringing and wider bandwidth models can be supplied upon request.

Model available:


1	400PT160	Aluminum Housing
2	400PT16P	Plastic Housing

Dimensions: dimensions are in mm

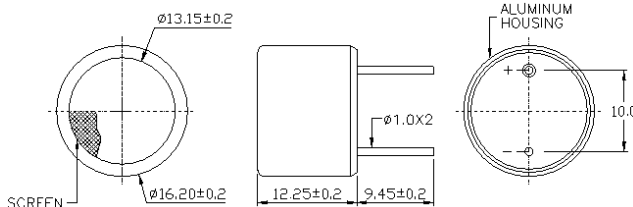


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

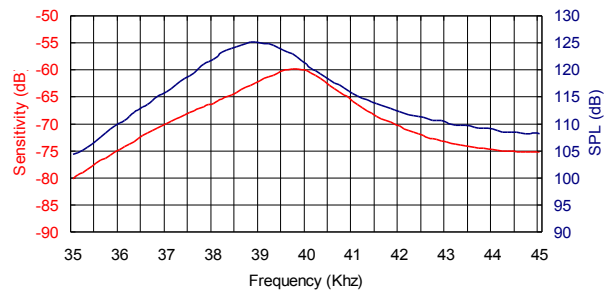


Beam Angle

Tested at 40.0KHz frequency

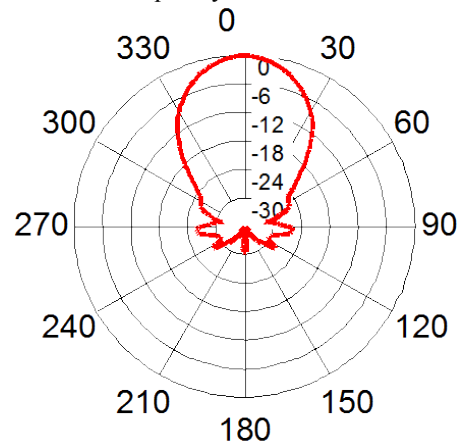


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation


[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

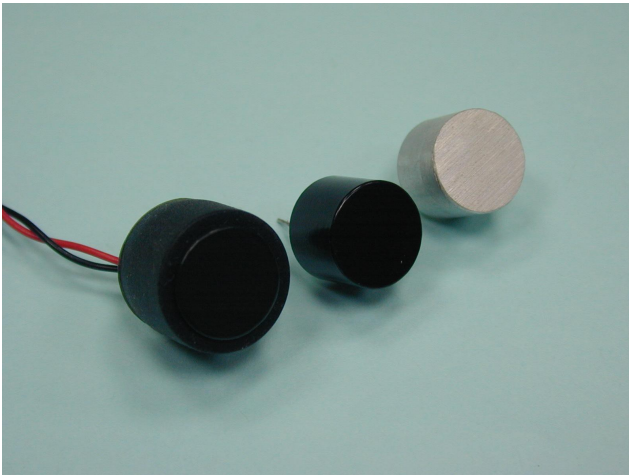

Dimensions: dimensions are in mm

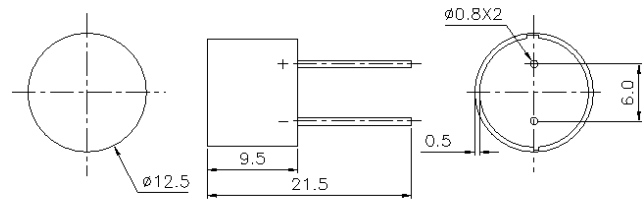

Impedance/Phase Angle vs. Frequency
Tested under 1Vrms Oscillation Level

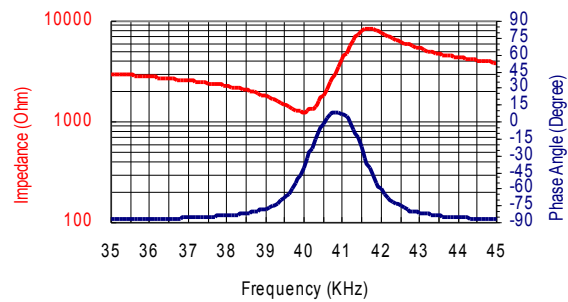

Specification


400EP125	Transceiver
Center Frequency	40.0±1.0Khz
Bandwidth (-6dB)	400EP125 1.5Khz
Transmitting Sound Pressure Level (with rubber sleeve)	100dB min.
at resonant frequency;0dB re 0.0002µbar per 10Vrms at 30cm	
Receiving Sensitivity (with rubber sleeve)	-78dB min.
at resonant frequency 0dB = 1 volt/µbar	
Nominal Impedance (Ohm)	1000
Ringing (ms) @25°C	1.2 max.
Capacitance at 1Khz	±20% 1600 pF
Max. Driving Voltage	100Vpp
20 bursts, 25ms repetition rate	
Total Beam Angle	-6dB 108°
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Models of less ringing are available


Models available:

1	400EP125	Natural Aluminum Housing
2	400EP125B	Black Painted Housing
3	400EP125BR	Black Housing+Rubber Sleeve

Sensitivity/Sound Pressure Level
SPL Tested under 10Vrms@30cm

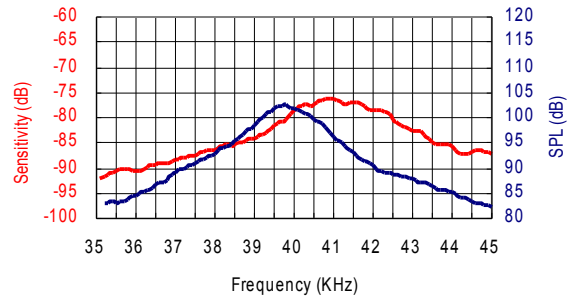

Beam Angle: Tested at 40.0Khz frequency

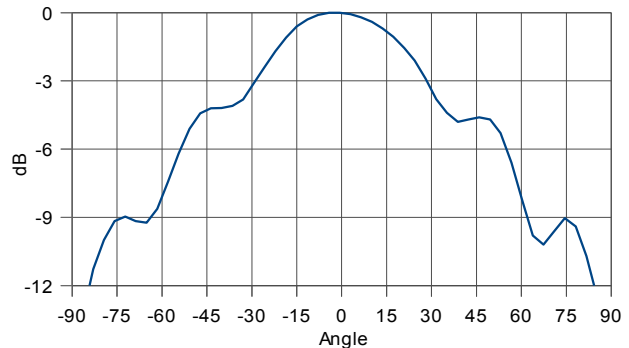


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105




Dimensions: dimensions are in mm

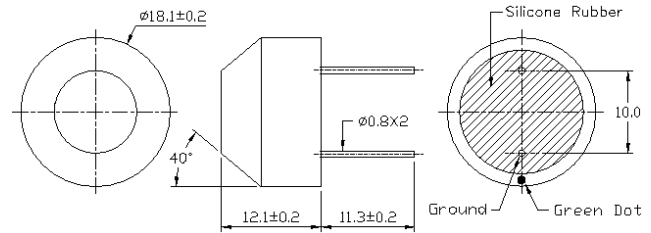

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

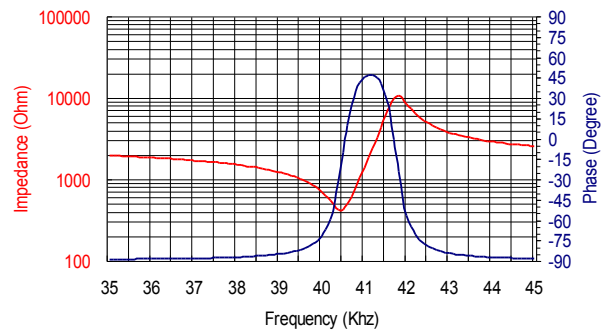

Specification

400EP18A	Transceiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	400EP18A 1.5KHz
Transmitting Sound Pressure Level at resonant frequency; 0dB re 0.0002μbar per 10Vrms at 30cm	108dB min.
Receiving Sensitivity at resonant frequency 0dB = 1 volt/μbar	-75dB min.
Nominal Impedance (Ohm)	750
Ringing (ms)	1.2 max.
Capacitance at 1KHz ±20%	2600 pF
Temperature Compensated Type	5200 pF
Max. Driving Voltage (Cont.)	20Vrms
20 bursts, 25ms repetition rate	100Vpp
Total Beam Angle	-6dB 85°
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C


All specification taken typical at 25°C
Both lead pins and lead wires output are available.
Temperature compensated type is available upon request.

Models available:


1	400EP18A	Black Al. Housing
2	400EP18A0	Natural Al. Housing
3	400EP18AC	Temp. Compensated

Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

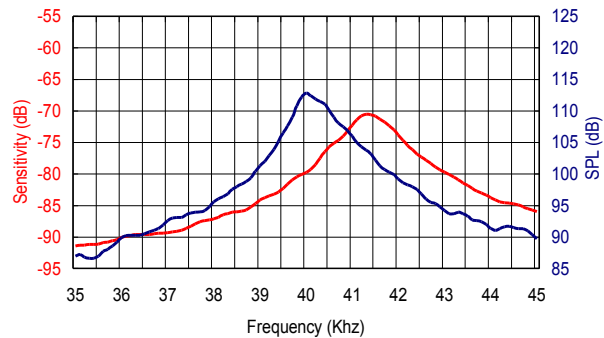

Beam Angle: Tested at 40.0KHz frequency

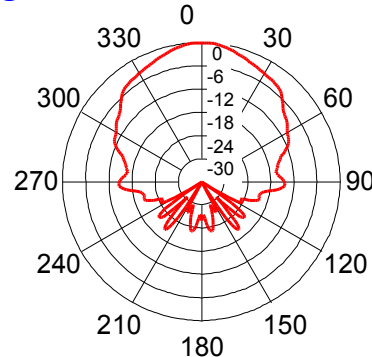


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105




Dimensions: dimensions are in mm

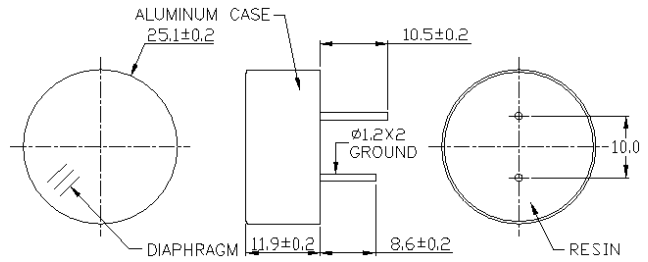

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

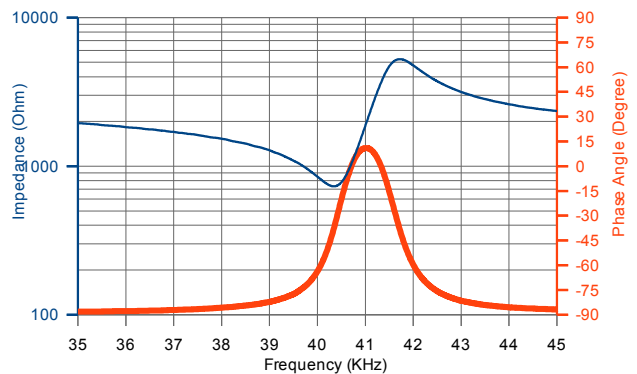

Specification

400EP250	Transceiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB)	2.0KHz(FOM)
Transmitting Sound Pressure Level at resonant frequency; 0dB re 0.0002μbar per 10Vrms at 30cm	110dB min.
Receiving Sensitivity at resonant frequency 0dB = 1 volt/μbar	-72dB min.
Capacitance at 1Khz ±20%	2700 pF
Max. Driving Voltage at 20 bursts, 25 ms repetition rate	100 Vp-p
Total Beam Angle(-6dB)	23° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C


All specification taken typical at 25°C
Closer frequency tolerance, shorter ringing, wider bandwidth and temperature compensated models can be supplied upon request.

Model available:


1	400EP250	Aluminum Housing
2	400EP25B	Black Al. Housing

Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

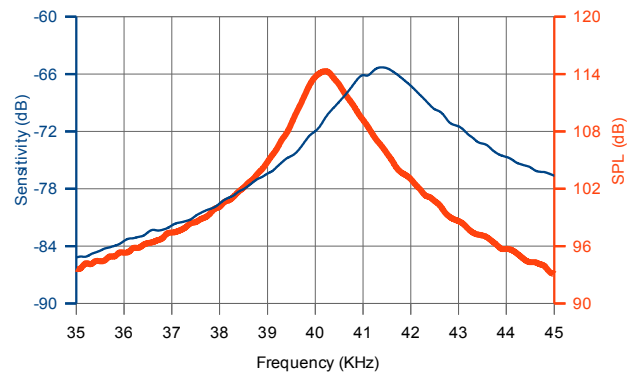

Beam Angle: Tested at 40.0Khz frequency

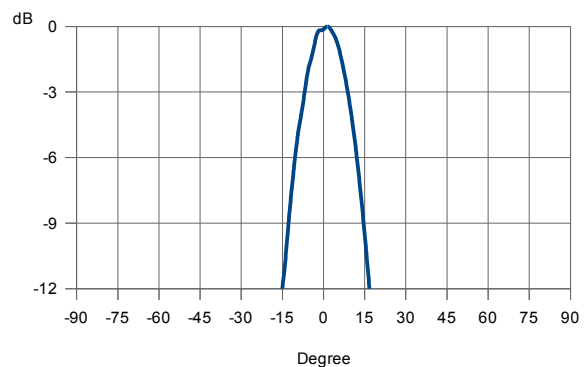

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105



Asymmetric Beam Patterns Specification


400EP14D	Transceiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB FOM)	1.0KHz
Transmitting Sound Pressure Level at resonant frequency;0dB re 0.0002μbar per 10Vrms at 30cm	103dB min. (Transducer alone)
Receiving Sensitivity at resonant frequency 0dB = 1 volt/μbar	-78dB min. (Transducer alone)
Nominal Impedance (Ohm)	1000
Ringling (ms)	1.2 max.
Capacitance at 1KHz ±20%	1600 pF
Temperature Compensated Type	3200 pF
Max. Driving Voltage (cont.)	20Vrms
20 bursts, 25ms repetition rate	100Vpp
Total Beam Angle -6dB	Wide 135° typ. Narrow 85° typ.
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Both lead pins and lead wires output are available

Models available:


1	400EP14D	Black Painted Housing
2	400EP14DC	Temperature compensated (TC)
3	400EP14DCR	T.C. + Rubber Sleeve

Dimensions: dimensions are in mm

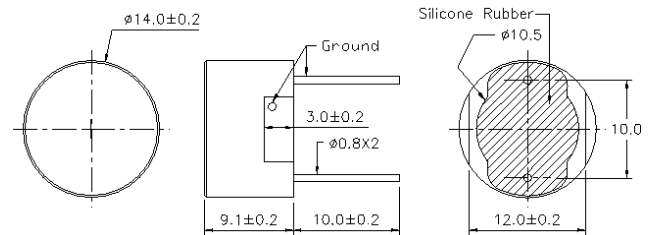


Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

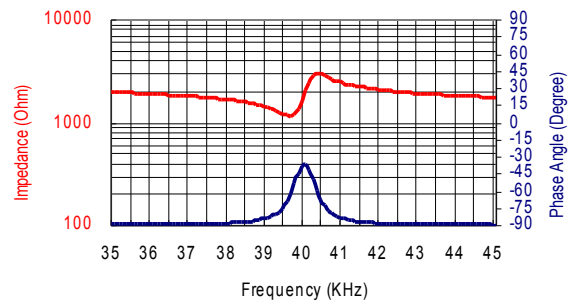


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

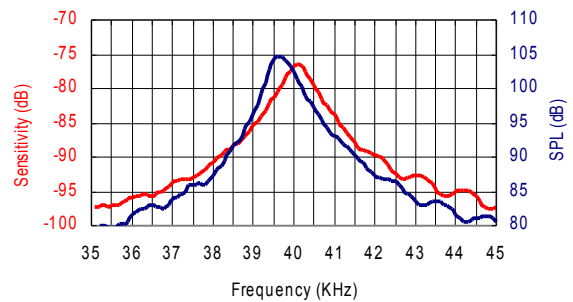


Beam Angle: Tested at 40.0Khz frequency

Wide Angle _____ Narrow Angle _____

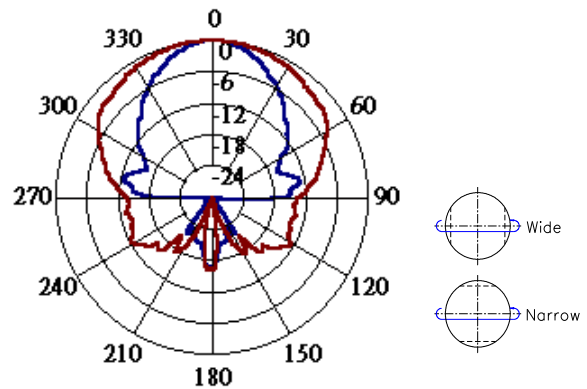

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

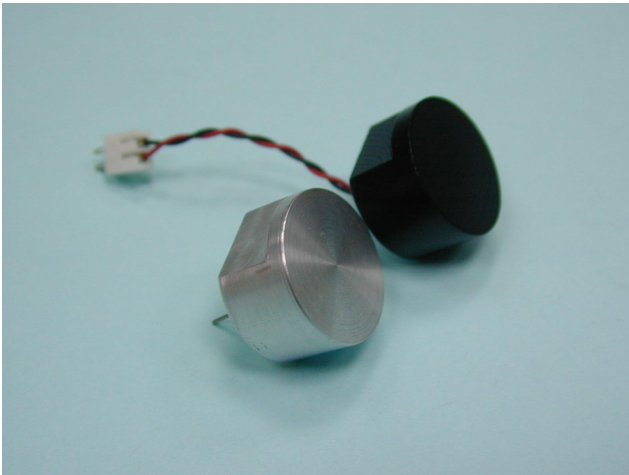

Asymmetric Beam Patterns Specification


400EP18D	Transceiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB) F.O.M.	2.0KHz
Transmitting Sound Pressure Level at resonant frequency; 0dB re 0.0002μbar per 10Vrms at 30cm	100dB min.
Receiving Sensitivity at resonant frequency 0dB = 1 volt/μbar	-80dB min.
Nominal Impedance (Ohm)	1000
Ringing	1.2ms max.
Capacitance at 1KHz ±20%	1800 pF
Temperature Compensated Type	3600 pF
Max. Driving Voltage (Cont.)	20Vrms
20 bursts, 25ms repetition rate	100Vpp
Total Beam Angle -6dB	Wide* 135° typ. Narrow* 75° typ.
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

All specification taken typical at 25°C
Both lead pins and lead wires output are available

Models available:


1	400EP18D	Black Al. Housing
2	400EP18DC	Temp. Compensated
3	400EP18DCR	T.C. with Rubber Sleeve

Dimensions: dimensions are in mm

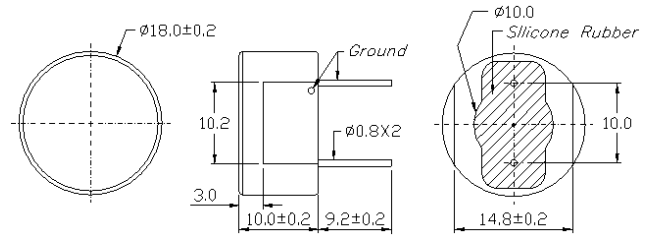


Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

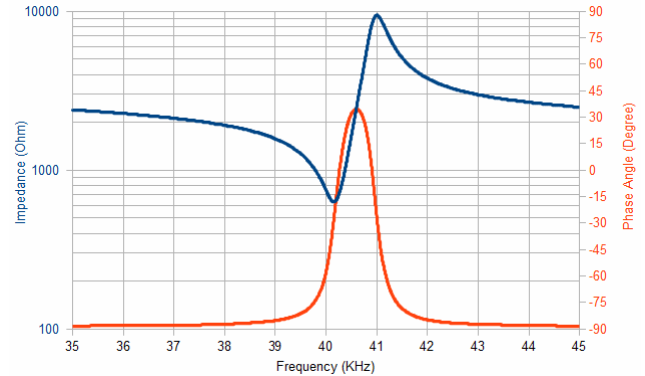


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

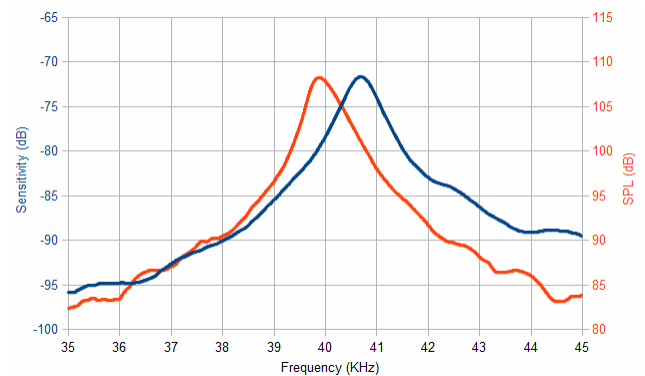


Beam Angle: Tested at 40.0Khz frequency

Wide Angle _____ Narrow Angle _____

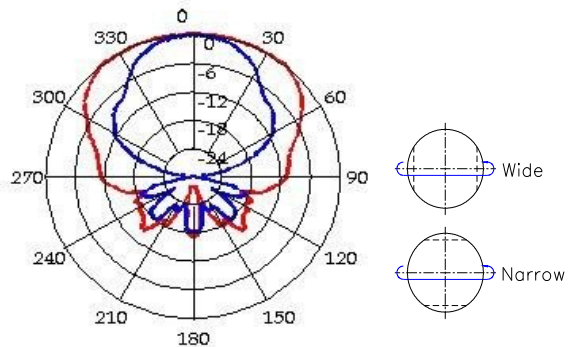


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

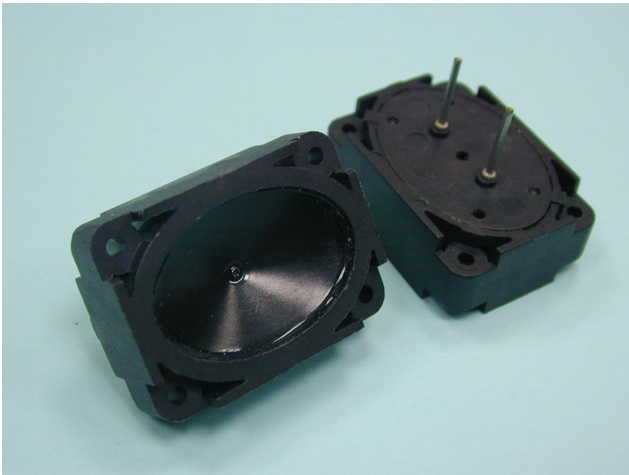

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

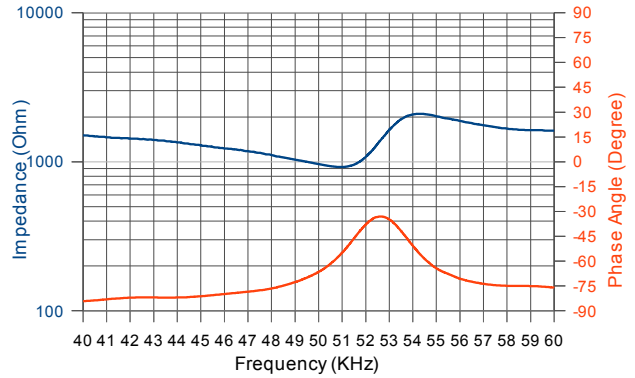


Asymmetric Beam Patterns

Specification

480EP900	Transceiver
Center Frequency	48.0±1.0KHz
Bandwidth (97dB) Transmitter	15.0KHz
(-80dB) Receiver	15.0KHz
Transmitting Sound Pressure Level at 48KHz; 0dB re 0.0002µbar per 10Vrms at 30cm	100dB min.
Receiving Sensitivity at 48KHz; 0dB = 1 volt/µbar	-80dB min.
Nominal Impedance (Ohm)	1000
Ringing (ms)	1.2 max.
Capacitance at 1KHz ±20%	2400 pF
Max. Driving Voltage @20 bursts, 25 ms repetition rate	100 Vp-p
Total Beam Angle -6dB @ 48KHz	Long Axis 19° typ. Short Axis 38° typ.
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C


All specification taken typical at 25°C
Closer frequency tolerance, shorter ringing and wider bandwidth models can be supplied upon request.

Dimensions: dimensions are in mm

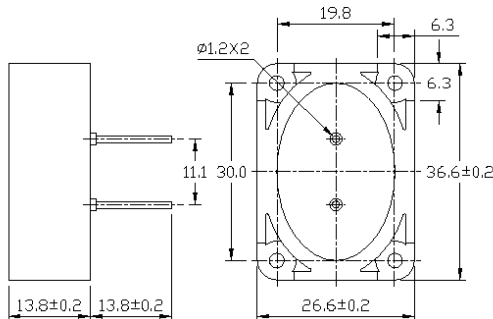


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

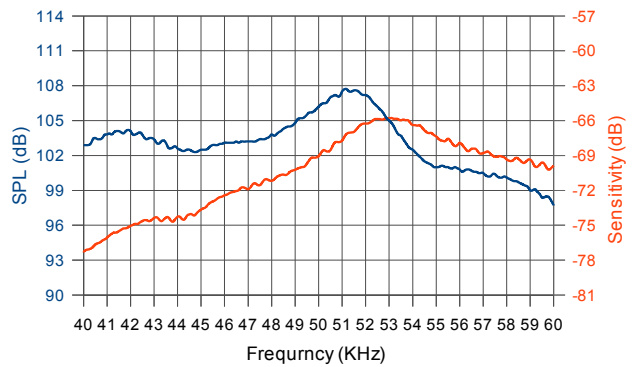

Beam Angle

Tested at 48.0KHz

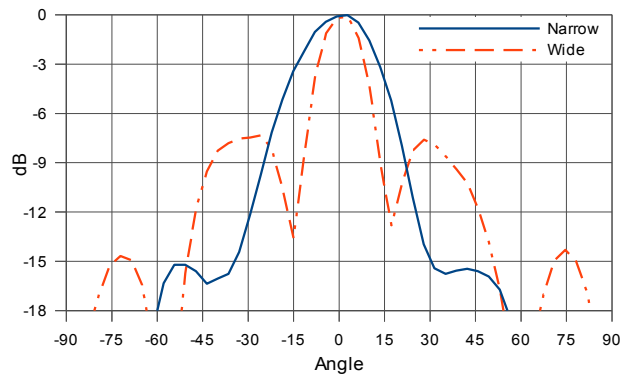

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105




Specification

043SR750	Transceiver
Center Frequency (KHz)	43.0±4.0
Echo Sensitivity 0dB = 20Vp-p	-57 dB min.
Dead Zone	70 cm
Bandwidth (Echo Sensitivity)	2 KHz
Nominal Impedance (Ω)	700
Capacitance at 1KHz ±20%	5700 pF
Max. Driving Voltage (Pulse)	1500Vpp 2% duty cycle tone burst
Total Beam Angle	-3dB 7.5° typical
	-6dB 11.0° typical
Matching Window	Silicone Rubber
Operation Temperature	-20 to 70°C
Storage Temperature	-30 to 80°C


All specification taken typical at 25°C
Low ringing model can be arranged

Dimensions: dimensions are in mm

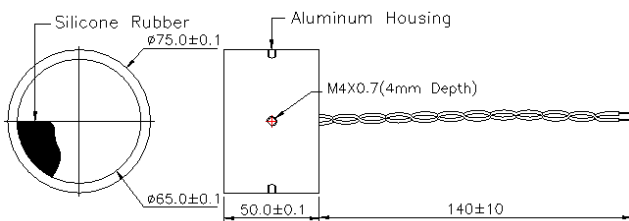


Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

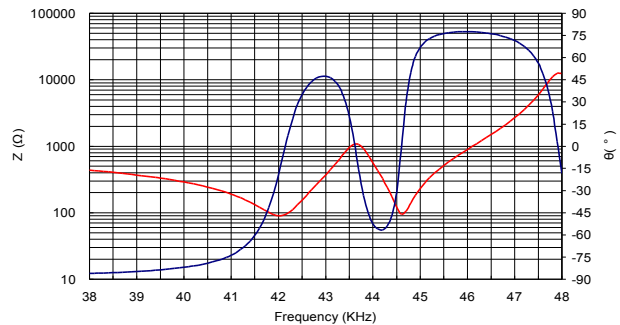


Echo Sensitivity vs. Frequency

Tested at 20Vp-p, 40 bursts

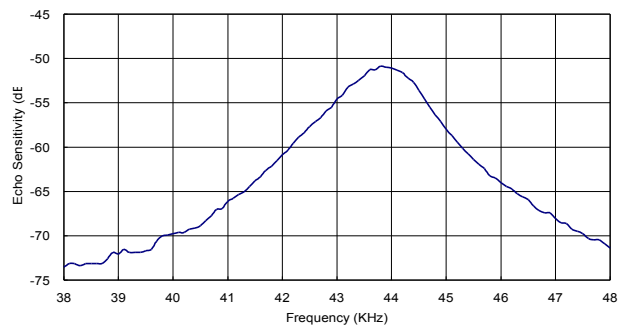


Echo Sensitivity/Ringing

Tested under 20Vp-p, 40 bursts, 100cm

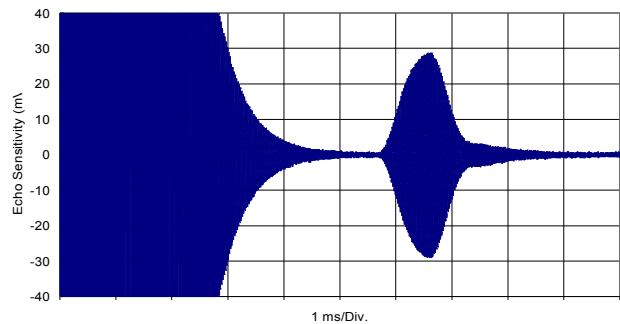

Beam Angle: Tested at 43.0Khz frequency

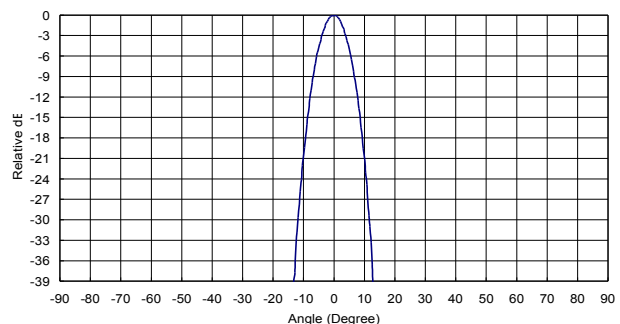


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105



Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

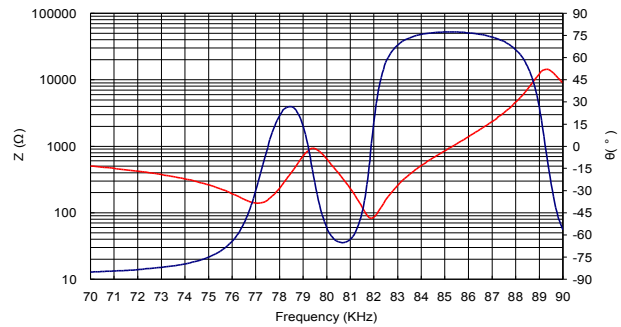


Specification

080SR365	Transceiver
Center Frequency (KHz)	80.0±5.0
Echo Sensitivity 0dB = 20Vp-p @ 50 cm	-57 dB min.
Dead Zone	35 cm
Bandwidth (Echo Sensitivity)	4.5 KHz
Nominal Impedance (Ohm)	700
Capacitance at 1KHz ±20%	2800 pF
Max. Driving Voltage (Pulse)	700Vpp 2% duty cycle
Total Beam Angle	-3dB 8.0° typical -6dB 11.0° typical
Matching Window	Silicone Rubber
Operation Temperature	-20 to 70°C
Storage Temperature	-30 to 80°C


Echo Sensitivity vs. Frequency

Tested at distance of 50cm, 20Vp-p, 40 bursts

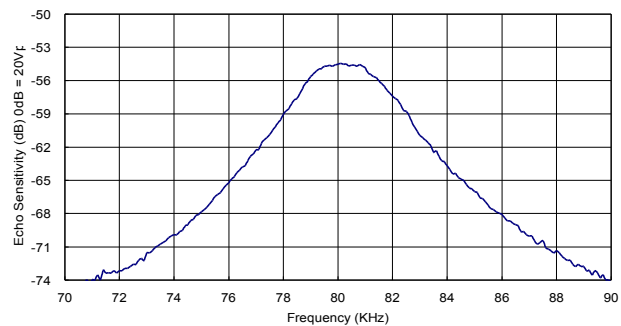


Echo Sensitivity/Ringing

Tested under 20Vp-p, 40 bursts, 50cm

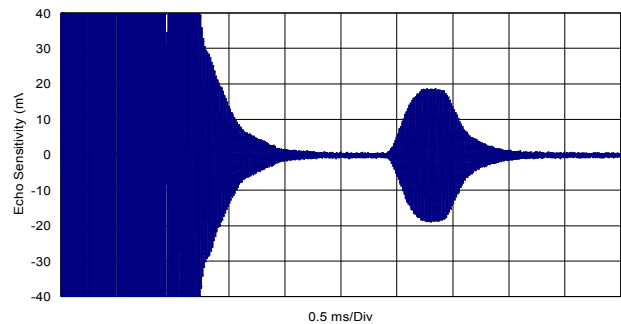


All specification taken typical at 25°C
Low ringing model can be arranged

Dimensions: dimensions are in mm

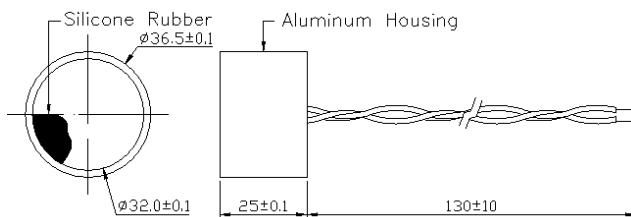


Beam Angle: Tested at 80 KHz frequency

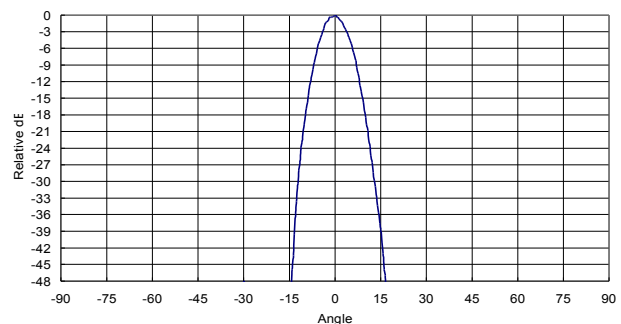


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

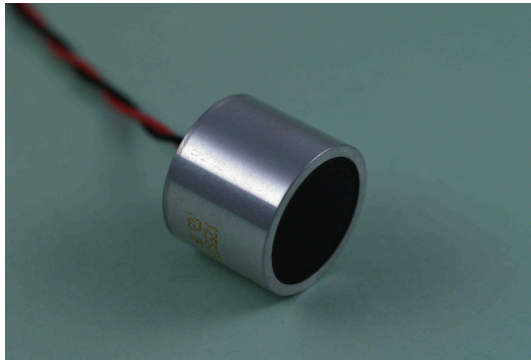

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

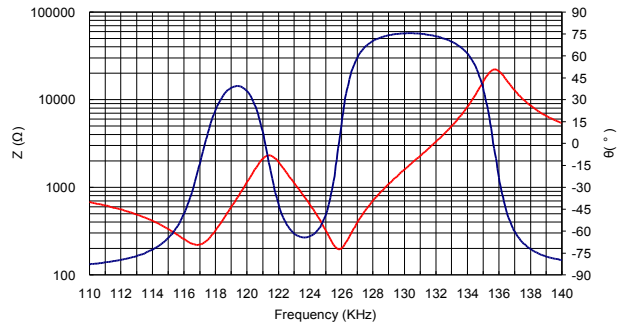


Specification

125SR250	Transceiver
Center Frequency (KHz)	125.0±10.0
Echo Sensitivity 0dB = 20Vp-p @ 25 cm	-55 dB min. (40 bursts)
Dead Zone	35 cm
Bandwidth (Echo Sensitivity)	8 KHz
Nominal Impedance (Ohm)	2000
Capacitance at 1KHz ±20%	1050 pF
Max. Driving Voltage (Pulse)	200Vpp 2% duty cycle tone burst
Total Beam Angle	-3dB 8.0° typical -6dB 11.0° typical
Matching Window	Silicone Rubber
Operation Temperature	-20 to 70° C
Storage Temperature	-30 to 80° C


Echo Sensitivity vs. Frequency

Tested at distance of 25cm, 20Vp-p, 40 bursts

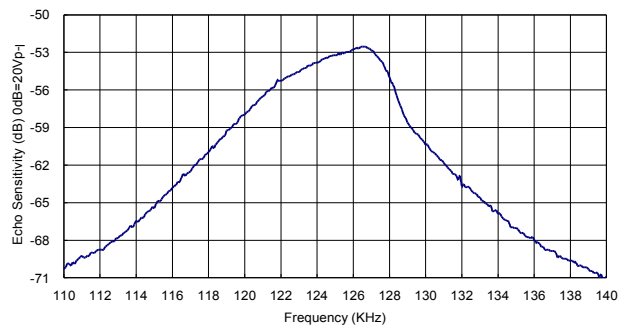


Echo Sensitivity/Ringing

Tested under 20Vp-p, 40 bursts, 25cm

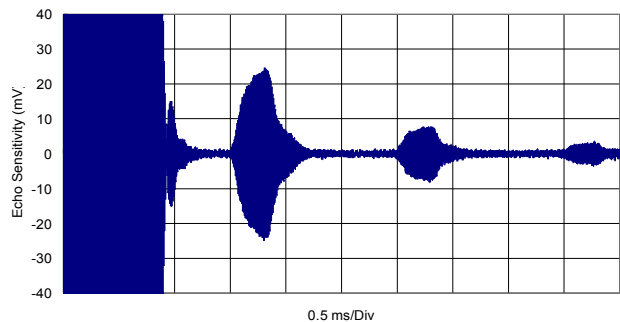


All specification taken typical at 25°C
Low ringing model can be arranged

Dimensions: dimensions are in mm

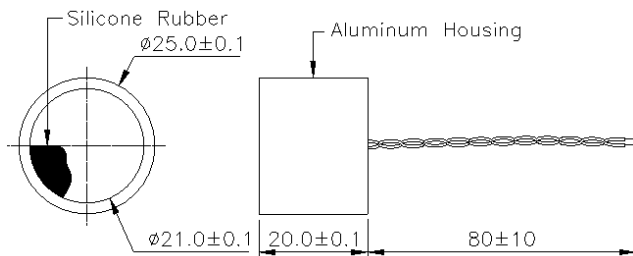

Beam Angle: Tested at 125.0KHz frequency

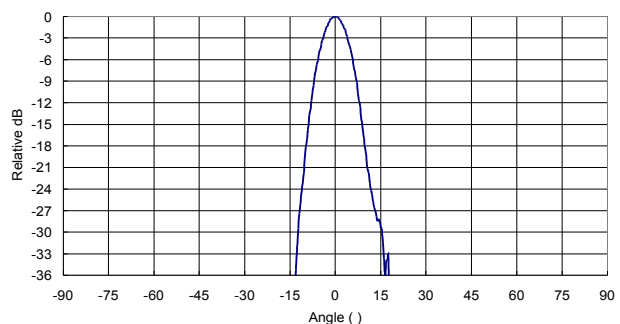


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105




Dimensions: dimensions are in mm

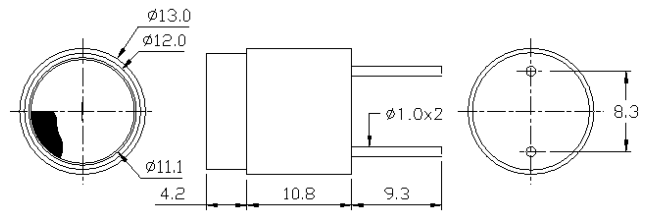

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

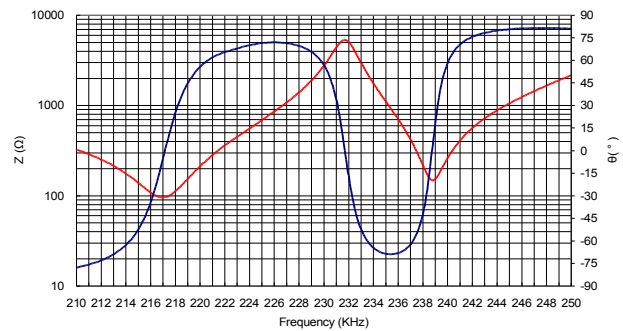

Specification

235SR130	Transceiver
Center Frequency (KHz)	235.0±10.0
Overall Echo Sensitivity 0dB = 20Vp-p @ 25 cm	-61 dB min. (40 bursts)
Bandwidth (Echo Sensitivity)	10KHz
Capacitance at 1KHz ±20%	540 pF
Max. Driving Voltage (Pulse)	80Vpp 10% duty cycle tone burst
Total Beam Angle	-3dB 7.0° typical
	-6dB 10.0° typical
Matching Window	Silicone Rubber
Operation Temperature	-20 to 60°C
Storage Temperature	-30 to 70°C


All specification taken typical at 25°C
Closer frequency tolerance, shorter ringing and wider bandwidth models can be supplied upon request.

Model available:

1	235SR013	Aluminum Housing
---	----------	------------------


Echo Sensitivity

Tested under 20Vp-p @25cm; 0dB=20Vp-p

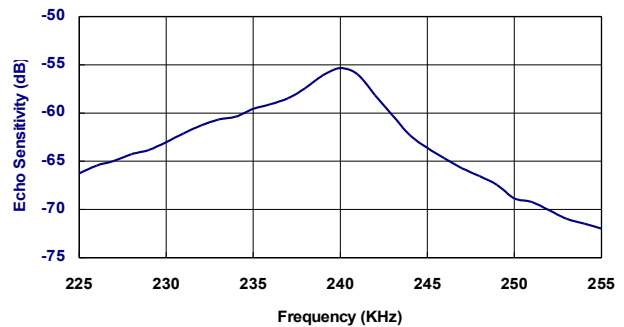


Beam Angle: Tested at 235.0KHz frequency

Reflector: Aluminum Plate L75×W75×T10 (mm)

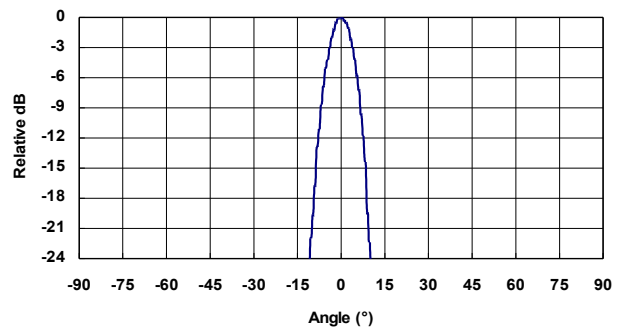


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

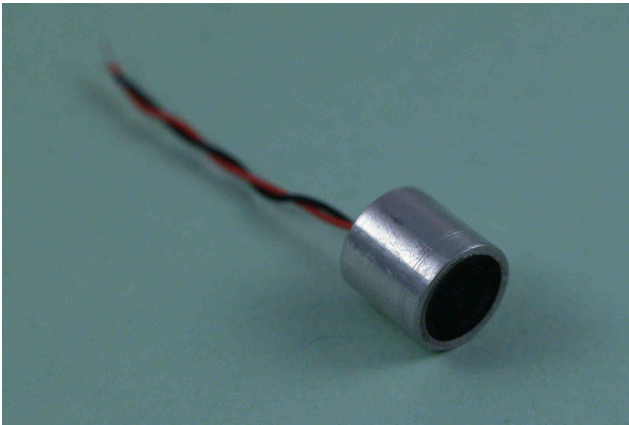

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

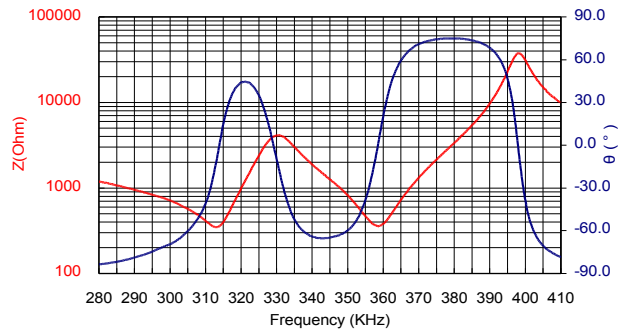


Specification

320SR093	Transceiver
Center Frequency (KHz)	320.0±10.0
Echo Sensitivity 0dB = 20Vp-p, 50 Bursts @ 10 cm	-65 dB min.
Dead Zone	8 cm
Bandwidth (Echo Sensitivity)	10KHz
Nominal Impedance (Ohm)	1200
Capacitance at 1Khz ±20%	270 pF
Max. Driving Voltage (Pulse)	50Vpp 10% duty cycle
Total Beam Angle	-3dB 9.5° typical -6dB 12.5° typical
Matching Window	Silicone Rubber
Operation Temperature	0 to 70°C
Storage Temperature	-20 to 80°C


Echo Sensitivity vs. Frequency

Tested at distance of 10cm, 20Vp-p, 50 bursts

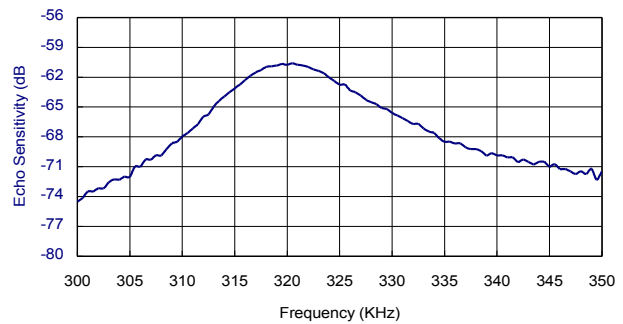


Echo Sensitivity/Ringing

Tested under 20Vp-p, 50 bursts, 10cm

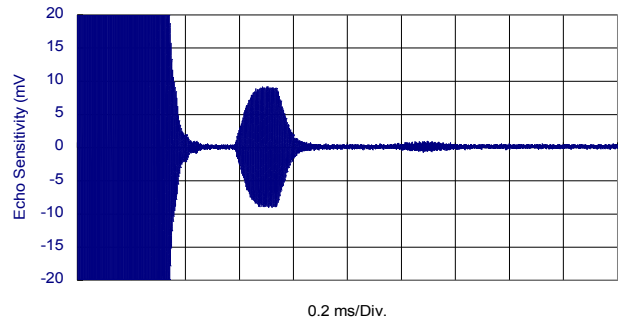


All specification taken typical at 25°C
Low ringing model can be arranged

Dimensions: dimensions are in mm

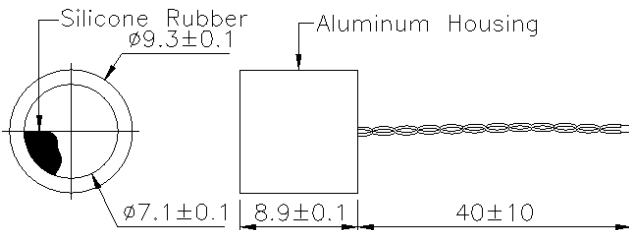

Beam Angle: Tested at 314.0 KHz frequency

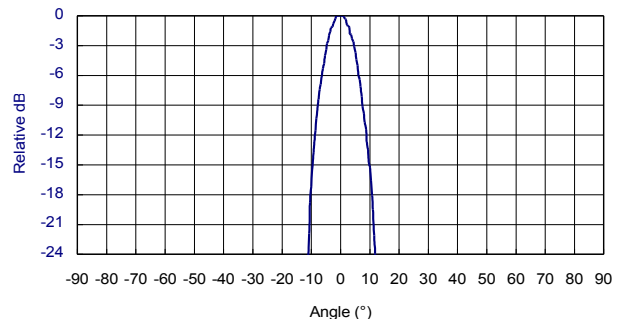


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105



Impedance/Phase Angle vs. Frequency:

Tested under 1Vrms Oscillation Level

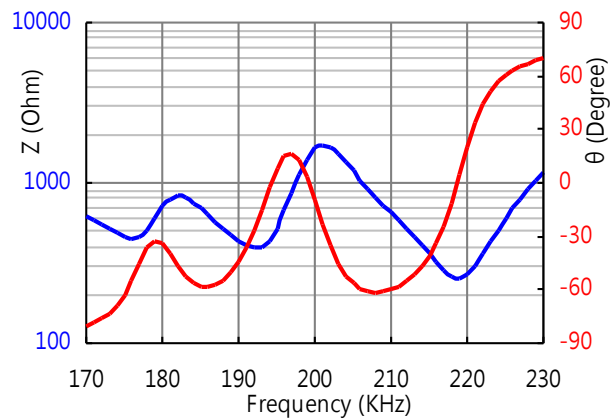


Specification

200GE180	Transceiver
Center Frequency	200.0±10KHz
Echo Sensitivity	-61dB
0dB = 20Vp-p , 30 Bursts Square wave	
Bandwidth (FOM)	10KHz
Nominal Impedance (Ohm)	600
Capacitance at 1Khz ±20%	600 pF
Max. Driving Voltage (Pulse)	50Vpp 10% duty cycle
Total Beam Angle	-6dB 10° typical
Matching Window	Resin with filler
Operation Temperature	-20 to 60°C
Storage Temperature	-30 to 70°C


Echo Sensitivity:

Tested under 20Vp-p @25cm ; 0dB=20Vp-p

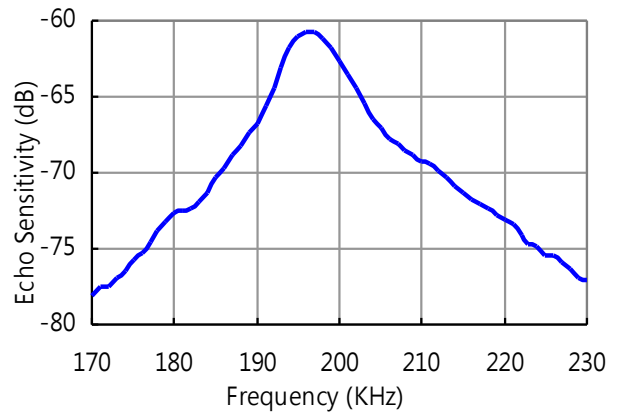

All specification taken typical at 25°C
Closer frequency tolerance, shorter ringing and wider bandwidth models can be supplied upon request.


Beam Angle: Tested at 200.0Khz frequency

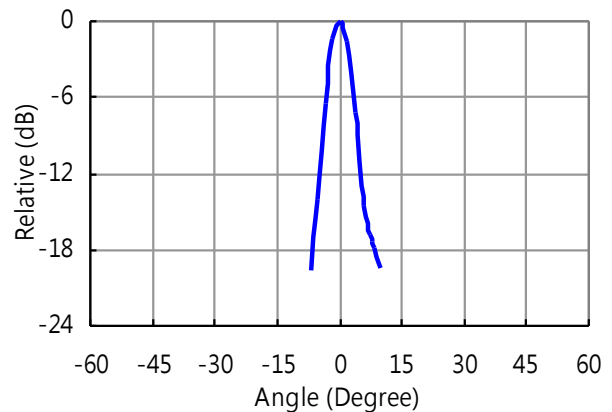

Model available:

1	200GE180	Aluminum Housing
---	----------	------------------

Dimensions: dimensions are in mm

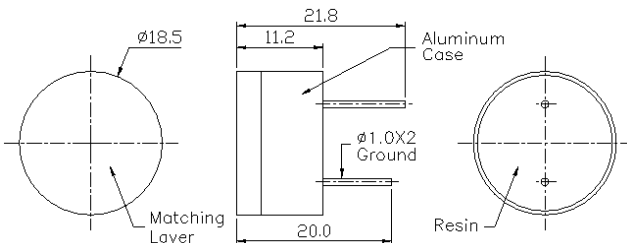

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105



Ultrasonic Transducer Assembled Units


Transducers equip with a 2.5 meters shield cable and covered by a rubber boot with a metal clip for easy installation are very suitable for most of vehicle alarms.

RCA, Amp or Molex type connector at the other cable end is available upon request.

Specification

Model Number	SQS-04	SQS-05	SQS-06
Transducer used	400ST/R100 or 10P	400ST/R120	400ST/R160 or 16P
Cable length	2.5 meters		
Connector used	RCA/Amp/Molex type or others upon request		

Dimensions

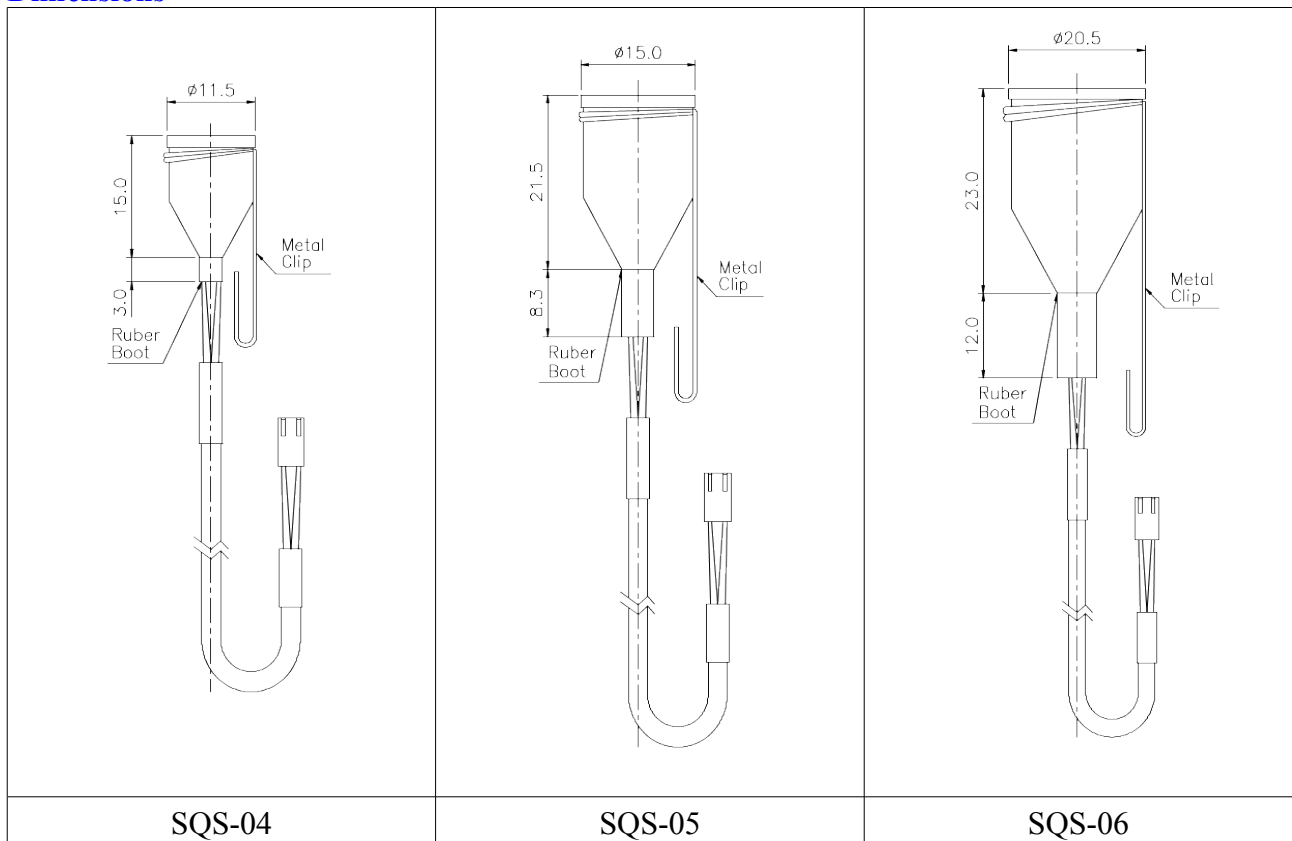


S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105




Dimensions: dimensions are in mm

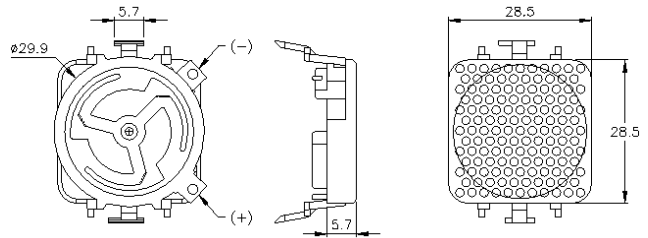


Transmitting Sound Pressure Level


Tested under 300Vac pk-pk, 200Vdc bias @50 cm

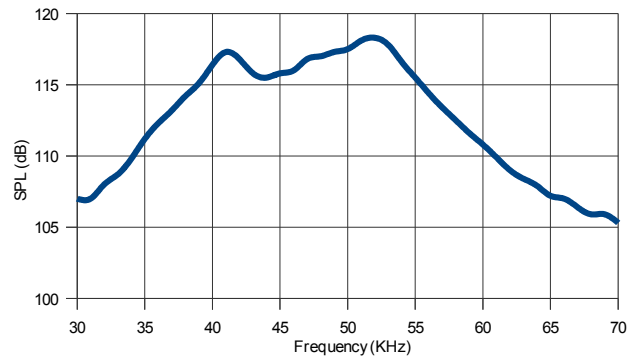

Receiving Sensitivity: Tested under 200Vdc bias

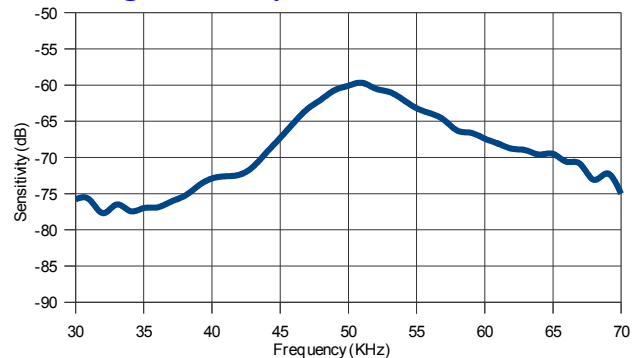

Beam Angle: Tested at 50.0Khz frequency



Specification

500ES290	Transceiver
Center Frequency	50.0±1.0KHz
Transmitting Sound Pressure Level at 50.0KHz; 0dB re 20µPa per 300Vac pk-pk, 200Vdc bias at 50 cm	116.0 dB min.
Receiving Sensitivity at 50.0KHz, 200Vdc bias, 0dB = 1 volt/µbar (0dB = 1 volt/Pa)	-65.0 dB (-45.0 dB)
Capacitance at 1KHz ±20%	600 - 700 pF
Suggested DC Bias Voltage	200 V
Suggested AC Driving Voltage	300V pk-pk
Maximum Combined Voltage	400V
Total Beam Angle	-6dB 13° typical
Operation Temperature	0 to 60°C
Standard Finish	
Foil (Diaphragm):	
1. 500ES290-G	Gold
2. 500ES290-A	Aluminum
Housing	ABS

All specification taken typical at 25°C




S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105




Dimensions: dimensions are in mm

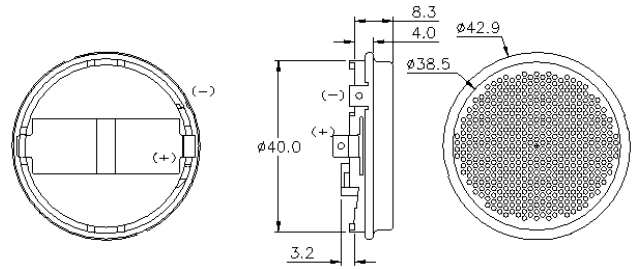

Transmitting Sound Pressure Level

Tested under 300Vac pk-pk, 200Vdc bias @50 cm

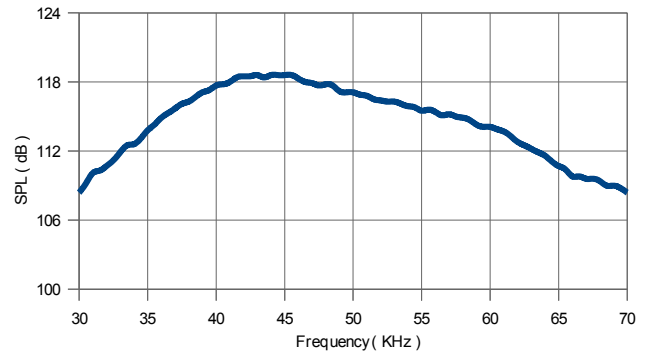

Specification


500ES430	Transceiver
Center Frequency	50.0±1.0KHz
Transmitting Sound Pressure Level at 50.0KHz; 0dB re 20µPa per 300Vac pk-pk, 200Vdc bias at 50 cm	116 dB min.
Receiving Sensitivity at 50.0KHz, 200Vdc bias, 0dB = 1 volt/Pa (0dB =1 volt/µbar)	-43 dB min. (-63 dB) min.
Capacitance at 1KHz ±20%	400 - 500 pF
Suggested DC Bias Voltage	200 V
Suggested AC Driving Voltage	300V pk-pk
Maximum Combined Voltage	400V
Total Beam Angle	-6dB 13° typical
Operation Temperature	0 to 60°C
Standard Finish	
Foil (Diaphragm)	See below
Housing	See below

All specification taken typical at 25°C


Models available

Model	Foil	Housing
500ES43AB	Aluminum	Black Painted Steel
500ES43AS	Aluminum	SUS 304
500ES43GB	Gold	Black Painted Steel
500ES43GS	Gold	SUS 304

Receiving Sensitivity: Tested under 200Vdc bias

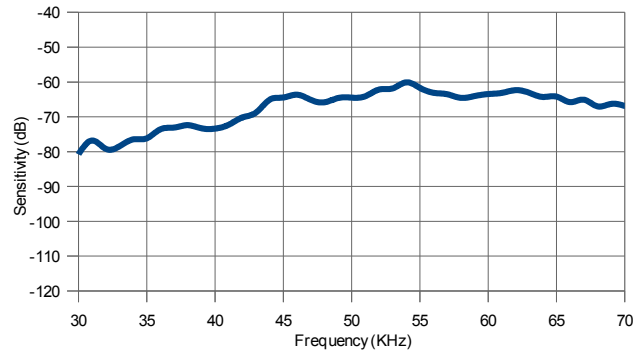

Beam Angle: Tested at 50.0Khz frequency

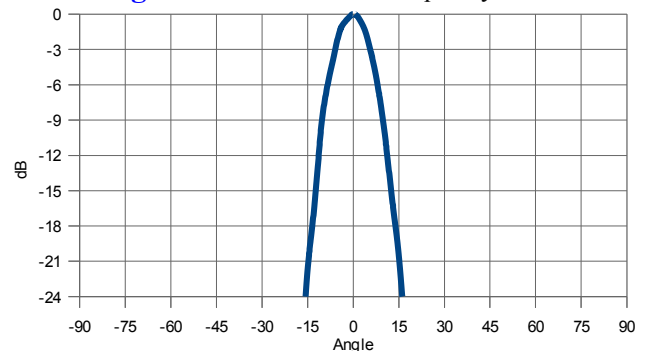

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

Bolt Clamped High Power Transducers



Features

- High efficiency & high output
- Large amplitude
- Low heat generation
- Durability & stability
- Easy connection

Applications

- Ultrasonic cleaners
- Ultrasonic welders
- Ultrasonic processing machines: bonding, drilling, etching, engraving and etc.


Specification

	30402S	45402H	45282H	60282H
Resonant frequency (KHz)	37.5	40.0	28.2	28
Motion Admittance (mMho)	35	15	50	40
Mechanic Q (Qm)	500	500	500	500
Capacitance (pF)	2700	4000	4000	4000
Allowable vibration rate (cm/sec.)	50	50	50	25


All specification taken typical at 25°C

Dimensions


Model: 30402S

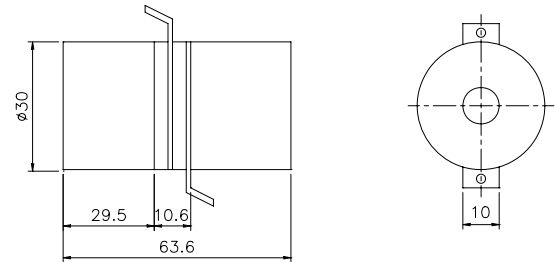


Model: 45402H

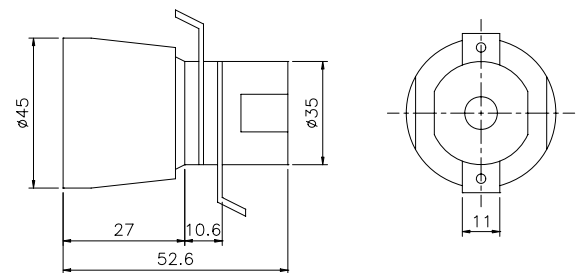

Model: 45282H

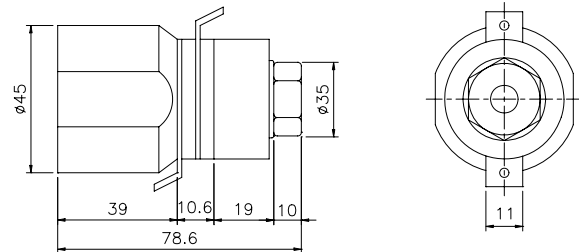


Model: 60282H

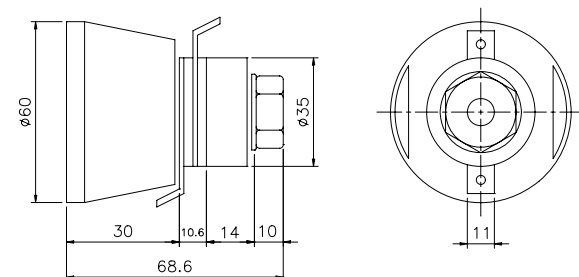

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

Ultrasonic Atomizing Transducers

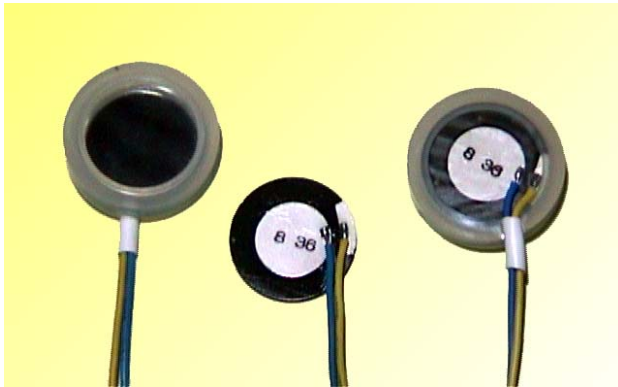

The ultrasonic atomizing transducers using our factory made high Q hard type piezoelectric ceramic element is ideal for atomizing liquids. A very fine mist having a particle diameter of only a few microns can be generated. We are not only supply atomizing element but also entire assembled transducer unit with silicone rubber holder.

Features

- Piezoelectric ceramic element clad with stainless steel for erosion resistance.
- Fine and consistent particle size of less than 3 μ m
- High atomizing efficiency >400 cc/hour
- Less power consumption
- High stability and durability


Applications

- Humidification in refrigerated food displays and storage, living environments, and air conditioning plants.
- Inhalation and disinfecting equipment
- Humidification in industrial process control for lubrication, coating and etc.

Specification:


Model Number	M165D20	M165D25
Resonance Frequency (MHz)	1.65 \pm 0.05	1.65 \pm 0.05
Resonance Impedance (Ohm)	<2.0	<2.0
Capacitance at 1KHz (pF)	2,000 \pm 20%	2,000 \pm 20%
Dissipation Factor at 1KHz	<0.5%	<0.5%
Operation Duration (hour)	>5,000	>5,000
Atomizing Quantity (cc/Hour)	300	400
Input Power (maximum)	25	30
Operation Temperature	0 to 45°C	0 to 45°C
Dimensions	L	110
	T	5
	OD	25
	ID	17.4

Dimensions dimensions are in mm

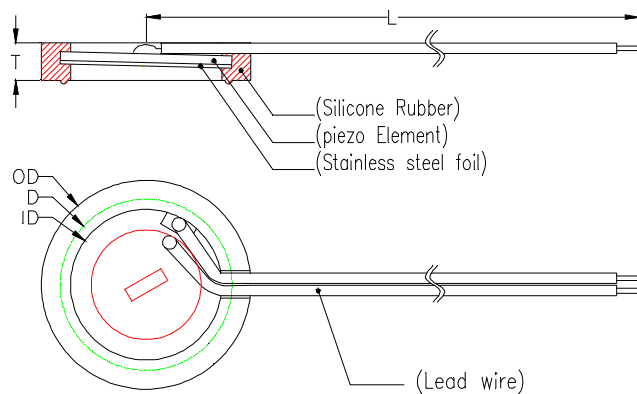

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

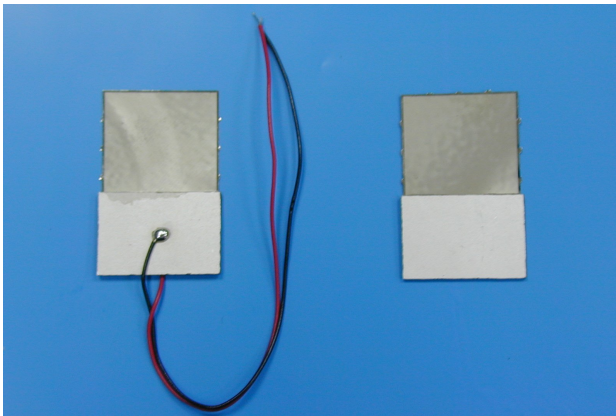

The ultrasonic vibration micro nozzle consists a piezoelectric ceramic and a metal foil, on which over thousands micro nozzles formed. Using the same principle as inkjet printer, this transducer atomizes water or liquids through a matrix of micro holes of around 7-10 μm .

The micro nozzles ultrasonic atomizing transducer can use siphon to draw small amount liquids to the surface of metal foil and then to atomize, which is much efficiency than the conventional ultrasonic atomizer for which a liquid tank with high level liquid has to be always loaded on the surface of ultrasonic transducers.

Features

- Fine and consistent misted particle size
- Adjustable misted particle size
- No loaded liquids require as comparing with conventional atomizers
- High atomizing efficiency
- Less power consumption
- High stability and durability


Applications

- Humidification in refrigerated food displays and storage, living environments, and air conditioning plants.
- Inhalation and disinfecting equipment
- Humidification in industrial process control for lubrication, coating and etc.
- Liquids dispensing systems


Specification:

Resonant Frequency	143 \pm 5	KHz	
Impedance	10	ohm	typ
Capacitance	2300 \pm 20%	pF	@1KHz , 20°C
Dimensions	L	29.1 \pm 0.2	mm
	W	17.3 \pm 0.1	mm
	T	1.0 \pm 0.1	mm
Metal Material	50	μm	PZT Element
Nozzle size	7 \pm 3	μm	Ni-Co Alloy


Impedance/Phase Angle:

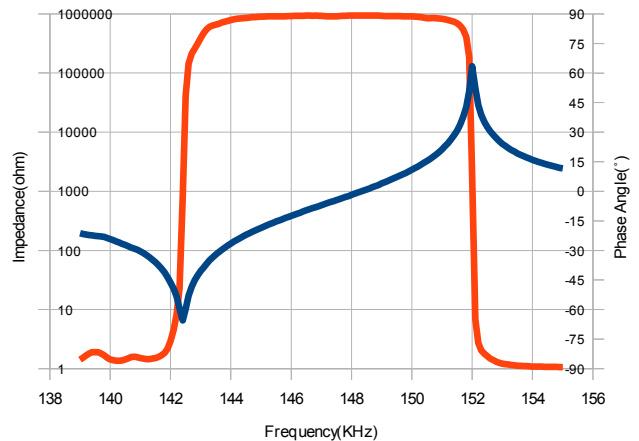

Construction

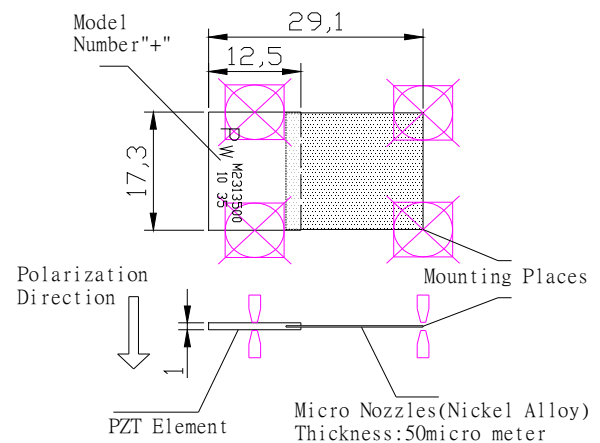


Driving Circuit

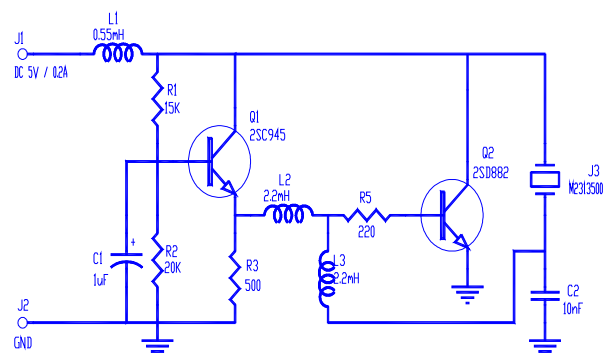

Remark: The negative side faces to the opening, the positive side faces to the liquid source, if driving circuit uses NPN transistor.



Dimensions: dimensions are in mm

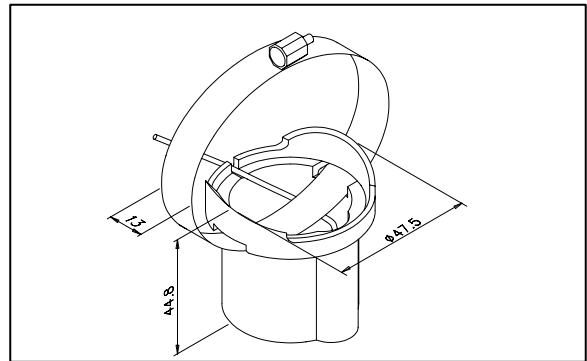

Specification

200LM450	Transceiver
Center Frequency	200±10.0Khz
Bandwidth (FOM -6dB)	25Khz
Transmitting Sound Pressure Level	160dB min.
0dB re 1µPa per 1Vrms at 100cm	
Receiving Sensitivity	-180dB min.
0dB = 1 volt/µPa	
Submerged Impedance (Ohm)	200
Capacitance at 1Khz	±20% 2000 pF
Input Power (Pulse Drive)	50 Watts
Total Beam Angle	-6dB 20°
Cable Length	4.5 m
Molded Connector	RCA Phono plug 90°
Housing Material	Plastic resin


Closer frequency tolerance, shorter ringing and wider bandwidth models can be supplied upon request.

Model available:

1	200LM450	Plastic Housing
---	----------	-----------------

Submerged Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

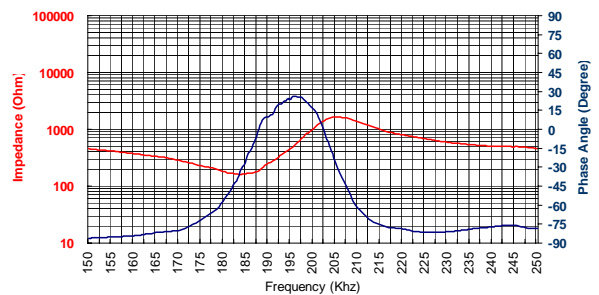

Receiving /Transmitting Sensitivity

Tested at distance of 100cm

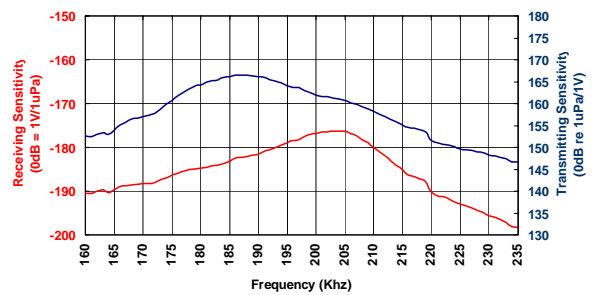


Figure of Merit

(Receiving Sensitivity + Transmitting Sensitivity)

