

VANSONIC ENTERPRISE CO., LTD.

8F.,No.7,Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335




FAX: +886-2-29625220

E-MAIL: vansonic@ms4.hinet.net

1.	MODEL:	26CR08F -M50ND(Black Mylar)-M50NT(Clear Mylar)								
2.	Dimension	Outer Diameter		26	mm.	Baffle Opening		22.5	mm.	
		Height		Refer to Drawing .		Weight		4.6	Grams.	
3.	Magnet	Materials		Rare Earth .		Size		Ø 9.5X1.5	mm.	
4	Nominal Lmpedance	8	Ω	±	15	%	At	1500	Hz.	
5.	Power Rating	Normal		500		mW.	Maximum		1000	mW.
6.	Lowest Resonant Frequency	540		±		20		%		Hz.
7.	Output Sound Pressure Lever (S.P.L.)	83		±		3		db / 0.5 Watt .	0.5 Meter.	
		Average at		600,		800,		1000,		1200
8.	Frequency Range	450		~		20000		Hz.	Average S P L - 10 db.	
9.	Distortion	5	%	Maximum At		1000		Hz.	500	mW.
10.	Abnormal Sound Test	Must Be Normal Test By				2.0		Volts. Sine Wave.		
11.	Load Test	White Noise With Weighted Filter				2.0		Volts.(RMS) 24 Hrs.		
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.								
		Current to the "+" or "Marked" Terminal.								

MOUNTING NOTICE


AT LEAST
0.8mm
FOR
DIAPHRAGM
MOVING

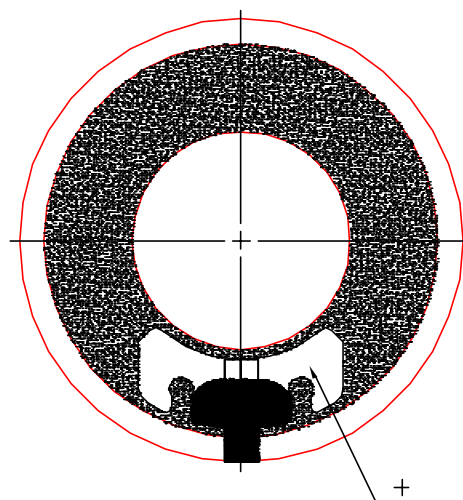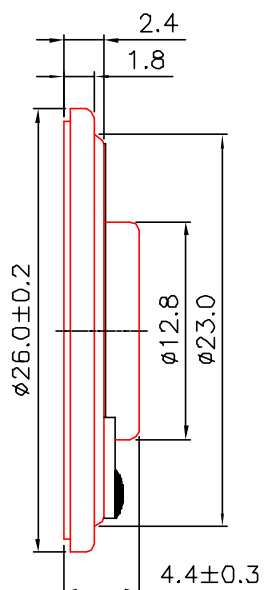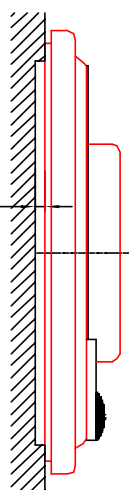

Unit : mm

Housing Material : METAL

26CR08F-M50ND Vol:2.0 (0.5W) Dis:0.5M VANSONIC
X:20.000kHz *Y:80.46dB ZA:Live Curve SSR Fund.

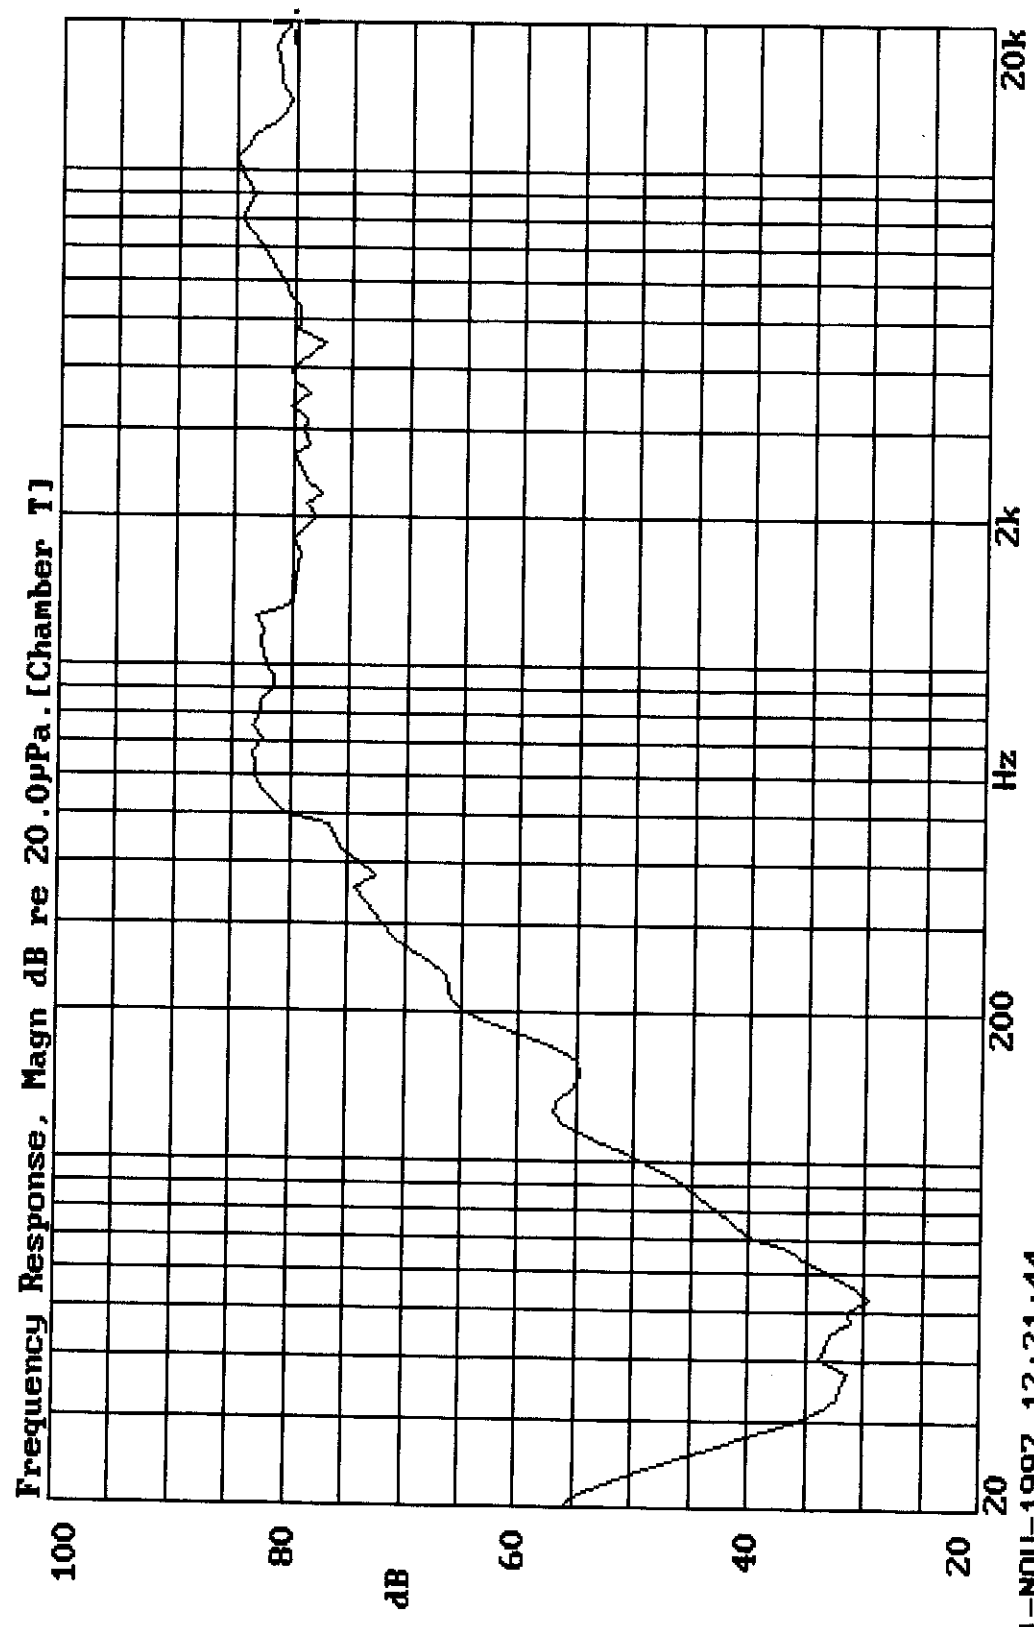

21-NOV-1997 12:21:44

Mode: SSR