

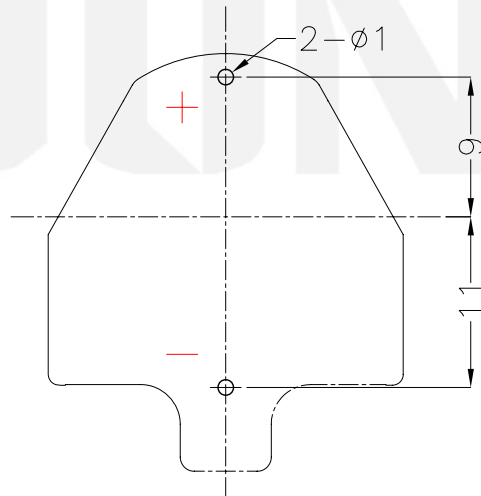
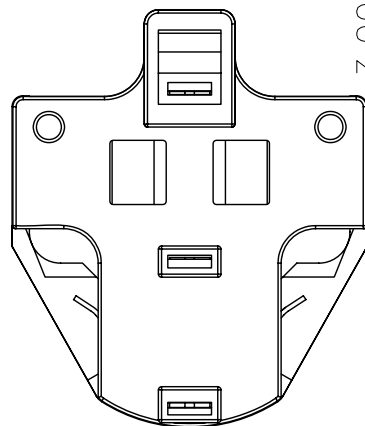
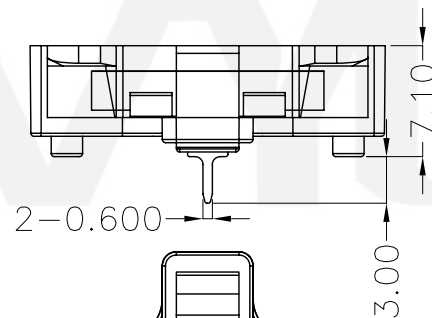


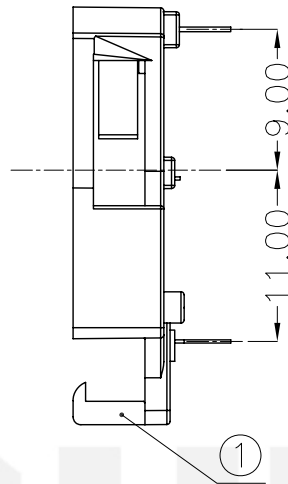

REV.	ECN NO.	REVISED	DATE

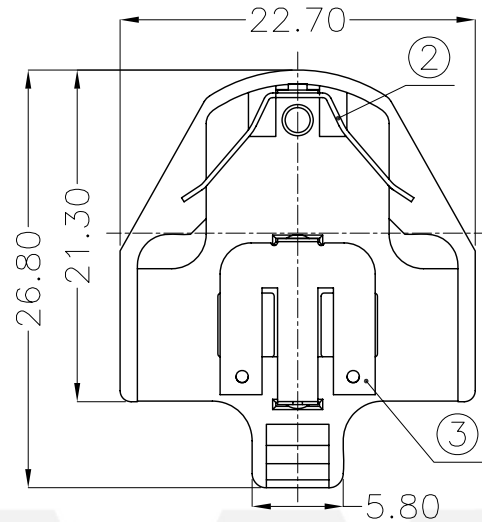

PCB Layout Diagram
Top View

NOTE:

1.MATERIAL:

a.HOUSING:PA66

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING: Sn 100u"-120u")

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

BS-08-A***023

电池座系列

BS-08系列

SMT 180° TYPE

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2017-07-15

ZW DANG

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Sn Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.30mm	Sn Plating
1	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com					
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND	YangFeng	DATE	2017-07-15	TITLE:	
		CHKD	ZhouRuicai	DATE	2017-07-15	BS-2032-8-3 DIP	
		APVD	XueShunyang	DATE	2017-07-15	PART NO.:	
WEIGHT: 1.43g		SCALE: 2:1		SIZE: A4		VIEW: 	
SHEET 1 OF 1		UNIT: mm		REV.: A/0		OBJECT: MY	
						DRAW NO.:MY-CP-0017	