



## CDM Series DIP Switch



CDM series DIP switch, low profile for space saving, gold contact provides high reliability, top tape type for washing process.

Item NO.:	CDM Series
Order(MOQ):	1000pcs
Payment:	100% T/T Before Production
Product Origin:	Zhejiang
Color:	Black
Shipping Port:	Ningbo/Shenzhen
Lead Time :	10 Working Days After Payment

### Technical parameters

Contact Rating:25mA 24VDC(switching), 100mA @50VDC(non-switching)

Electrical Life:2,000 operations min.

Contact Resistance:50m $\Omega$  max.

Insulation Resistance:100M $\Omega$  min.

Dielectric Strength:500VAC/1 min

Operation Force:1,000gf max.

Circuit:SPST

### Application


Industrial control

Automatic machines control



Telecommunication

# Dimension


## CDM SERIES SLIDE TYPE

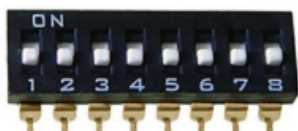


## CONTACT SYSTEM

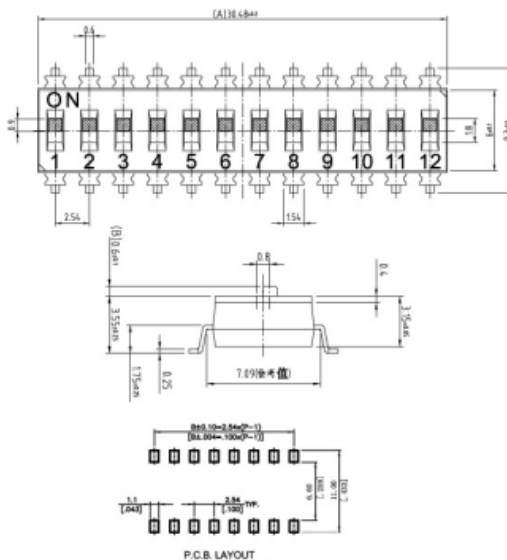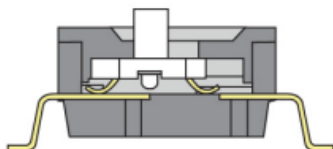

MODEL NO.	NO. POS	A
CDM-02	2	2.54
CDM-03	3	5.08
CDM-04	4	7.62
CDM-05	5	10.16
CDM-06	6	12.70
CDM-07	7	15.24
CDM-08	8	17.78
CDM-09	9	20.32
CDM-10	10	22.86
CDM-12	12	25.40

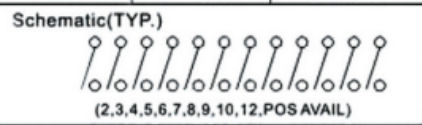

# Order code



### Package Style:

- [ ] = Tube
- T/R= Tape & Reel

### Soldering:

- V = Lead Free Solderable

### Seal:

- [ ] = Regular
- T = Top Tape Sealed <Recessed Actuator Only>

### Number Of Positions:

- 01 = 1 Position
- 02 = 2 Position
- 03 = 3 Position
- 04 = 4 Position
- 05 = 5 Position
- 06 = 6 Position
- 07 = 7 Position
- 08 = 8 Position
- 09 = 9 Position
- 10 = 10 Position
- 12 = 12 Position

### Actuator Type:

- [ ] = Raised Actuator
- R = Recessed Actuator

CDH = Through Hole Type Dip Switch

CDM = Gull Wing Terminal S.M.T