

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/10/07'		LJC 12/10/07'
E	DRAWING UPDATE	JLZ 12/20/18'		

NOTES:
 Specifications:
 1. Contact resistance: 20mΩ Max.
 2. Insulation resistance: 1000MΩ Min.
 3. Dielectric withstanding voltage: 600V AC(Rms) for 1 minute.
 4. Current rating:3A.
 5. Voltage rating:250V AC Rms.
 6. Temperature: -40°C~+105°C.
 Materials:
 1. Contact material: Copper alloy.
 2. Contact plating: Gold plating over nickel.
 3. Insulator material: High temp,Black,UL94-V0.
 Product number code:

DS1022-01 - X X X X X X - X

- Plating level(For gold only)
3A: Level 3A B: Level B
- Packing type
B: Tube
R: Tape on reel
- Pick up support
S: W/ Pick up
X: W/O Pick up
- Dim A type
1: 7.10
or A*.*
- Contact plating
8: Full gold flash
6: Full Tin
- Contacts type
S: SMT type
- No.of contacts
2x2-2x40

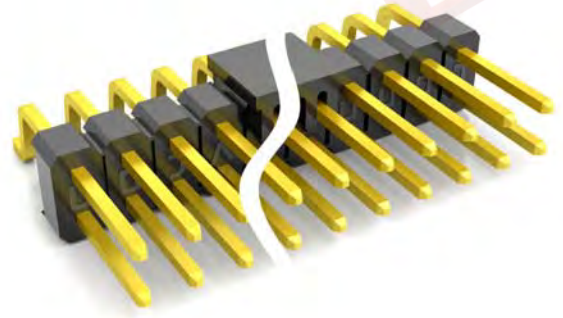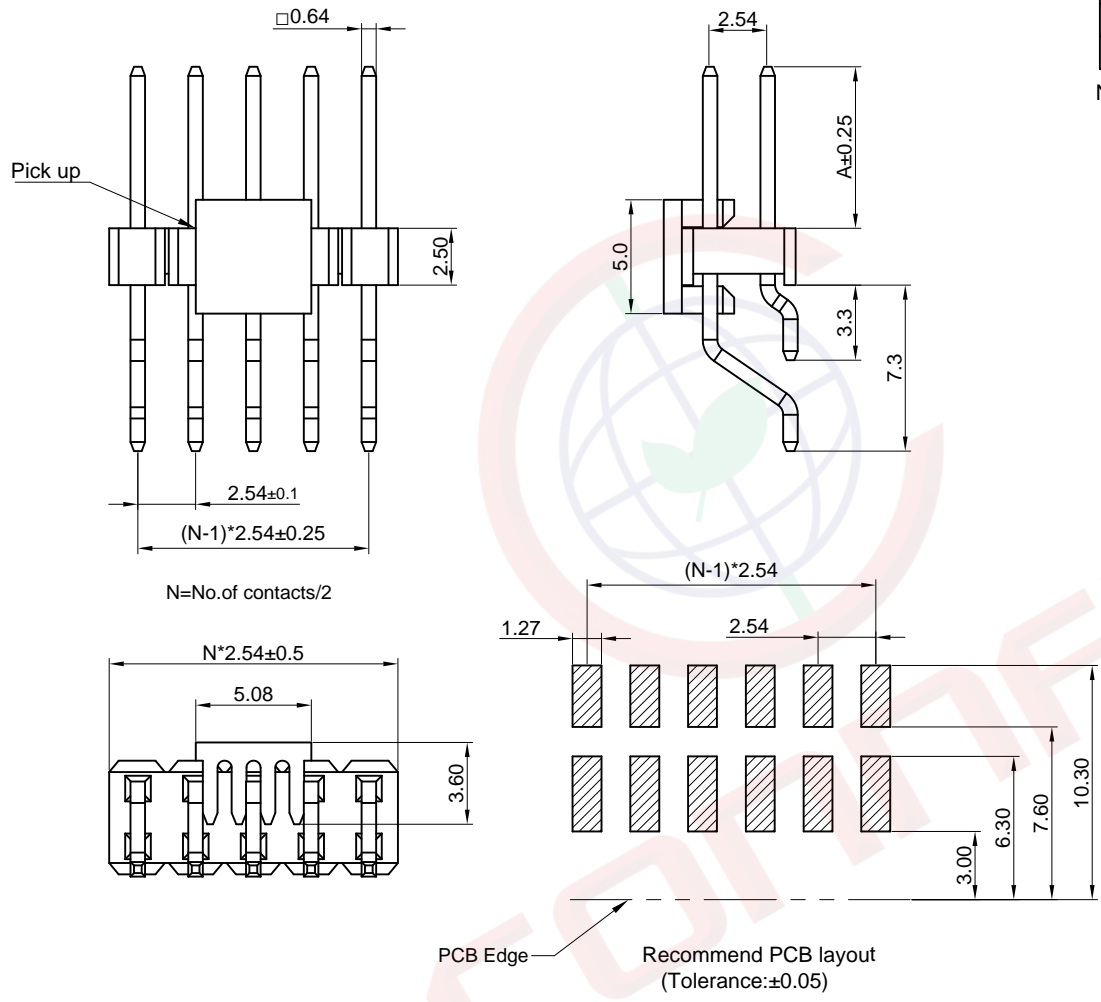

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1022-01-XXXXXX-X-E	

PROJECTION		TITLE	2.54mm PIN HEADER 2 ROW R/A SMT TYPE
UNITS	mm	SERIES	DS1022-01 SERIES
SHEET SIZE	A4		

晨翔电子有限公司
 CONNELY CONNELY ELECTRONIC CO. LTD