

HFLS1E20-762


Plug-in terminal block

DIMENSIONAL DRAWING

OUTLINE DIMENSIONS, WIRING DIAGRAM


Unit:mm



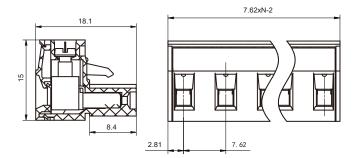

FEATURES

- Adopt screw lift connection technology
- Easy to connect and remove the end of the wire using screwdriver
- Plug-in direction is parallel to wire axis direction




SPECIFICATION

Load	10A 300V (ULstandard) 12A 250V (IEC standard)
Poles	2~12
Pitch	7.62mm
Conductor Cross Section	0.2~2.5mm²/24-12 AWG
Rated Dielectric Strength	3100Vac/min
Rated Withstand Pulse Voltage	e 6kV
Ambient Temperature	-40 °C ~105 °C
Striping Length	7mm
Insulation Material Type/Insula	tion Material Group PA/I

CHARACTERISTIC CURVES

CURRENT CARRYING CAPACITY CURVE

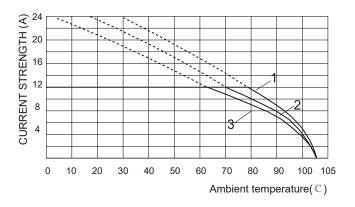

Notes: Curve 1: HFLS1E20-762/S2-GN coordinate with HFLS1D-762/S2-GN Curve 2: HFLS1E20-762/S5-GN coordinate with HFLS1D-762/S5-GN Curve 3: HFLS1E20-762/S12-GN coordinate with HFLS1D-762/S12-GN



ORDERING DATA

ТҮРЕ	POLES	PCS/BOX
HFLS1E20-762/S2-GN	2	170
HFLS1E20-762/S3-GN	3	110
HFLS1E20-762/S4-GN	4	80
HFLS1E20-762/S5-GN	5	60
HFLS1E20-762/S6-GN	6	50
HFLS1E20-762/S7-GN	7	50
HFLS1E20-762/S8-GN	8	40
HFLS1E20-762/S9-GN	9	30
HFLS1E20-762/S10-GN	10	30
HFLS1E20-762/S11-GN	11	30
HFLS1E20-762/S12-GN	12	30

Disclaimer:

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

@ Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.