

SK6013 Low Noise, High PSRR, High Speed, CMOS LDO

GENERAL DESCRIPTION

The SK6013 is a high accuracy, low noise, high speed, low dropout CMOS Linear regulator with high ripple rejection and fast discharge function. The device offers a new level of cost effective 63 devices.

SK6013 can provide product selections of output value in the range of 1.0V~3.6V by every 0.1V step.

The current limiter's fold-back circuit also operates as a short circuit protection and an output current limiter at the output pin.

The SK6013 regulators are available in standard SOT23-5L and DFN1x1-4L packages. Standard products are Pb-free and Halogen-free.


FEATURES

- Input voltage: 2.5V~6.5V
- Output range: 1.0V~3.6V (customized by every 0.1V step)
- Maximum output current: 400mA@ $V_{IN}-V_{OUT}=0.5V$
- PSRR: 75dB @1KHz
- Dropout voltage: 220mV @ $I_{OUT}=200mA$
- Quiescent current : 35 μ A Typ.
- Shut-down current: <1 μ A
- Recommend capacitor: 1 μ F
- Ultra-low output noise: 20 μ V_{RMS}

APPLICATIONS

- Digital cameras
- Cellphones
- Bluetooth and wireless handsets
- Other portable electronic devices


TYPICAL APPLICATION CIRCUIT

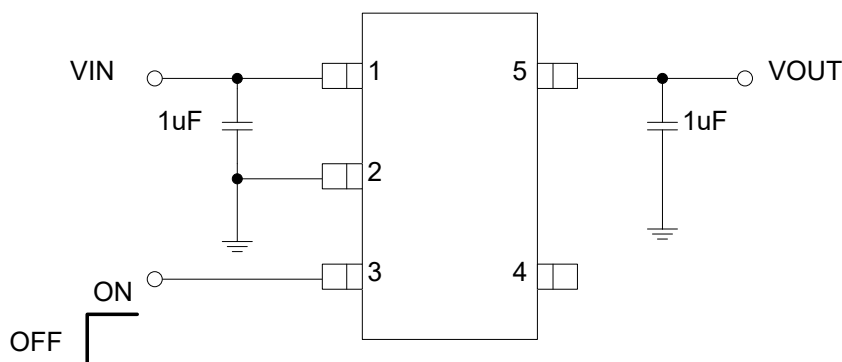

PIN ASSIGNMENT




SOT23-5L



SOT23-5L (Top View)



DFN1x1-4L

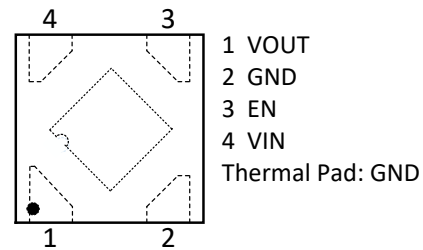


DFN1x1-4L (Top View)

PART NUMBER RULES

SK6013[1][2][3]

Code	Description
[1]	V _{OUT} discharge " ": w/o fast discharge A/B: with fast discharge
[2]	Package: S5: SOT23-5L D4: DFN1x1-4L
[3]	Voltage version: XX: 1.0V~3.6V by 0.1V step Example: 28: 2.8V

MARKING DESCRIPTION:

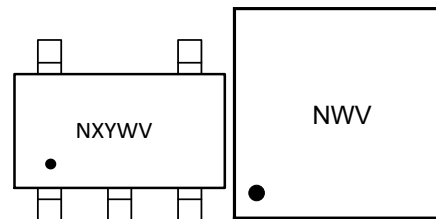

SOT23-5L

DFN1x1-4L

"N": Product code

"X": Package factory

"Y": Wafer foundry vendor.

"W": The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "a" stands for week 27, "z" stands for week 52.

"V": Output voltage code.

ORDERING INFORMATION

PART NO	PACAKGE	V _{OUT} DISCHARGE	TEMPERATURE	TAPE & REEL
SK6013S5-XX ^{Note}	SOT23-5L	No	-40 ~ +85℃	3000/REEL
SK6013BS5-XX ^{Note}	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013AD4-XX ^{Note}	DFN1x1-4L	Yes	-40 ~ +85℃	10000/REEL

Note:XX indicates 1.0V~3.6V by 0.1V step. For example, 28 means product outputs 2.8V

PACKAGE INFORMATION

PART NO	PACAKGE	V _{OUT} DISCHARGE	TEMPERATURE	TAPE & REEL
SK6013S5-18	SOT23-5L	No	-40 ~ +85℃	3000/REEL
SK6013S5-28	SOT23-5L	No	-40 ~ +85℃	3000/REEL
SK6013S5-30	SOT23-5L	No	-40 ~ +85℃	3000/REEL
SK6013S5-33	SOT23-5L	No	-40 ~ +85℃	3000/REEL
SK6013BS5-12	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013BS5-15	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013BS5-18	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013BS5-25	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013BS5-28	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013BS5-30	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013BS5-33	SOT23-5L	Yes	-40 ~ +85℃	3000/REEL
SK6013AD4-12	DFN1x1-4L	Yes	-40 ~ +85℃	10000/REEL
SK6013AD4-18	DFN1x1-4L	Yes	-40 ~ +85℃	10000/REEL
SK6013AD4-25	DFN1x1-4L	Yes	-40 ~ +85℃	10000/REEL
SK6013AD4-28	DFN1x1-4L	Yes	-40 ~ +85℃	10000/REEL
SK6013AD4-30	DFN1x1-4L	Yes	-40 ~ +85℃	10000/REEL
SK6013AD4-33	DFN1x1-4L	Yes	-40 ~ +85℃	10000/REEL

PIN DESCRIPTION

PIN NO	SYMBOL	I/O	DESCRIPTION
SOT23-5L			
1	VIN	Power	Input
2	GND	Ground	Ground
3	EN	I	Enable (active high, do not float)
4	NC	/	Not connected
5	VOUT	O	Output

PIN NO	SYMBOL	I/O	DESCRIPTION
DFN1x1-4L			
1	VOUT	O	Output
2	GND	Ground	Ground
3	EN	I	Enable (active high, do not float)
4	VIN	Power	Input

ABSOLUTE MAXIMUM RATINGS^(Note)

SYMBOL	ITEMS		VALUE	UNIT
V_{IN}	Input Voltage		-0.3~8	V
I_{OUT}	Output Current		550	mA
P_{DMAX}	Power Dissipation	SOT23-5L	0.3	W
		DFN1x1-4L	0.6	
T_J	Junction Temperature		-40~125	°C
T_A	Ambient Temperature		-40~85	°C
T_{STG}	Storage Temperature		-55 to 150	°C
T_{SOLDER}	Package Lead Soldering Temperature		260°C, 10s	

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED OPERATING RANGE


SYMBOL	ITEMS	VALUE	UNIT
V_{IN}	Supply Voltage	2.5to 6.5	V
I_{OUT}	Output Current	<300	mA
T_{OPT}	Operating Temperature	-40 to +85	°C

ELECTRICAL CHARACTERISTICS


The following specifications apply for $V_{OUT}=2.8V$, $T_A=25^{\circ}C$, unless specified otherwise.

SYMBOL	ITEMS	CONDITIONS	MIN	TYP	MAX	UNIT
V_{IN}	Input Voltage				6.5	V
V_{OUT}	Output Range	$V_{OUT}<2V$, $V_{IN}=2.7V$, $I_{OUT}=1mA$	-3	V_{OUT}	3	%
		$V_{OUT}\geq 2V$, $I_{OUT}=1mA$	-2	V_{OUT}	2	
I_Q	Quiescent Current	$V_{OUT}=2.8V$, $I_{OUT}=0$		35		μA
I_{LIMIT}	Current Limit	$V_{IN}=V_{EN}=4.5V$		500		mA
V_{DROP}	Dropout Voltage	$V_{OUT}=2.8V$, $I_{OUT}=200mA$		220	250	mV
		$V_{OUT}=2.8V$, $I_{OUT}=300mA$		320	350	
ΔV_{LINE}	Line Regulation	$V_{IN}=2.7\sim 5.5V$, $I_{OUT}=1mA$		0.01	0.15	%/V
ΔV_{LOAD}	Load Regulation	$V_{OUT}=2.8V$, $I_{OUT}=1\sim 300mA$		40	70	mV
I_{SHORT}	Short Current	$V_{EN}=V_{IN}$, V_{OUT} Short to GND with 1Ω		80		mA
I_{SHDN}	Shut-down Current	$V_{EN}=0V$			1	μA
PSRR	Power Supply Rejection Rate	$V_{IN}=5V_{DC}+0.5V_{P-P}$ $F=1KHz$, $I_{OUT}=10mA$		75		dB
		$V_{IN}=5V_{DC}+0.5V_{P-P}$ $F=1MHz$, $I_{OUT}=10mA$		55		
V_{ENH}	EN logic high voltage	$V_{IN}=5.5V$, $I_{OUT}=1mA$	1.2		V_{IN}	V
V_{ENL}	EN logic low voltage	$V_{IN}=5.5V$, $V_{OUT}=0V$			0.4	V
I_{EN}	EN Input Current	$V_{EN}=0$ to $5.5V$			1.0	μA
e_{NO}	Output Noise Voltage	10Hz to 100KHz, $C_{OUT}=1\mu F$		20		μV_{RMS}

SIMPLIFIED BLOCK DIAGRAM

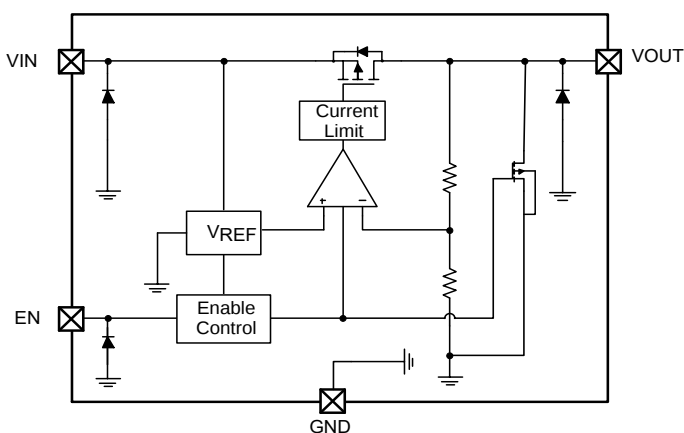







With auto-discharge

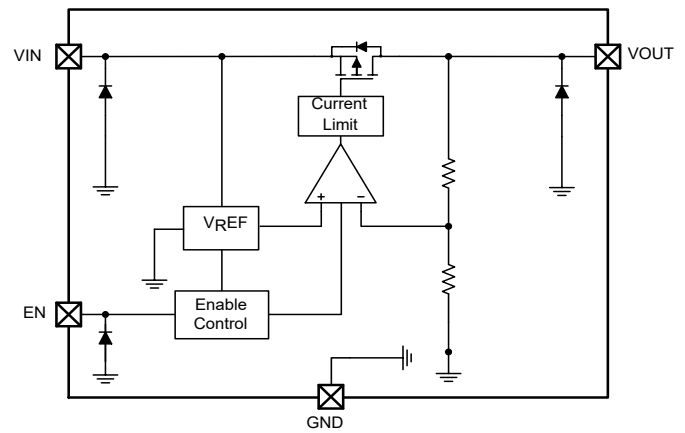


Without auto-discharge

TYPICAL PERFORMANCE CHARACTERISTICS


$C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $V_{IN}=4.5V$, $V_{OUT}=2.8V$, $T_A=25^\circ C$, unless specified otherwise.

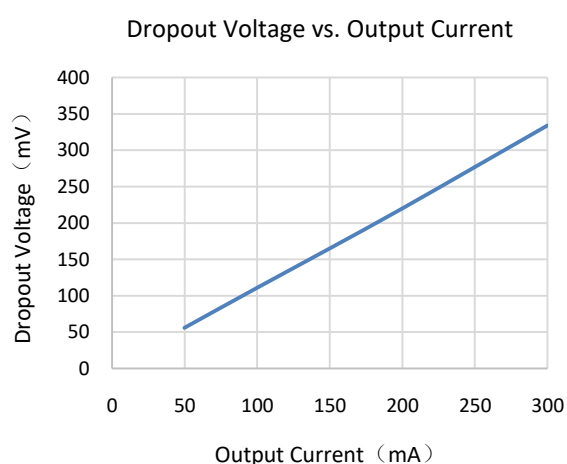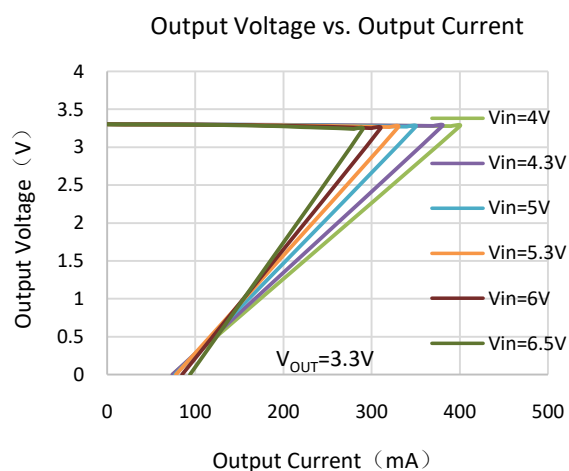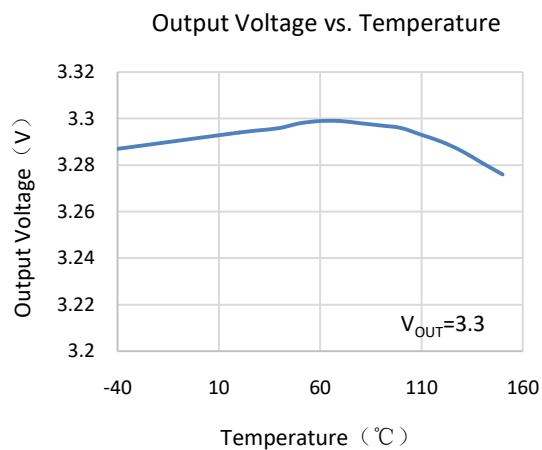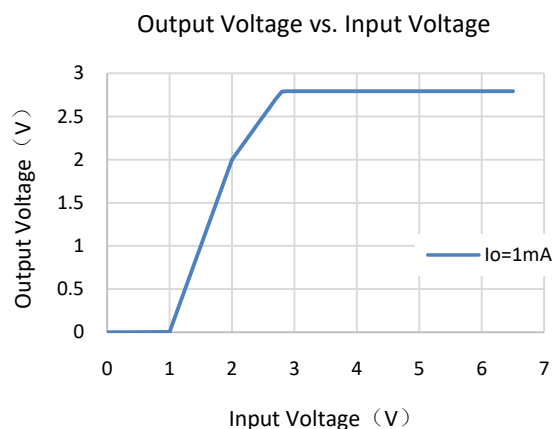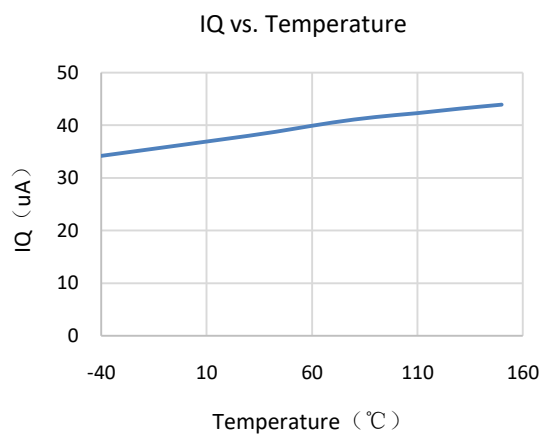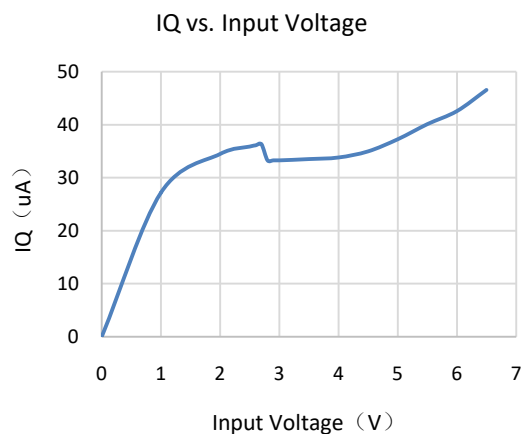

PSRR vs. Frequency

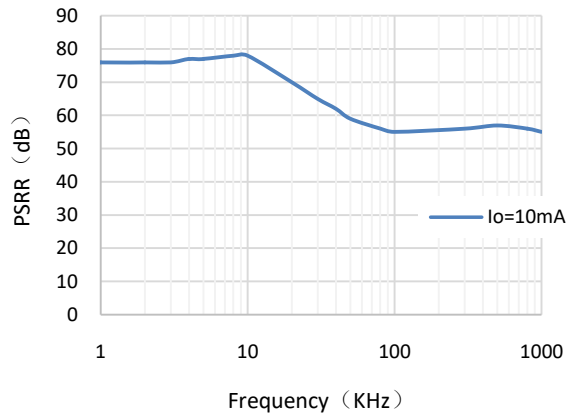


Current Limit vs. Input Voltage

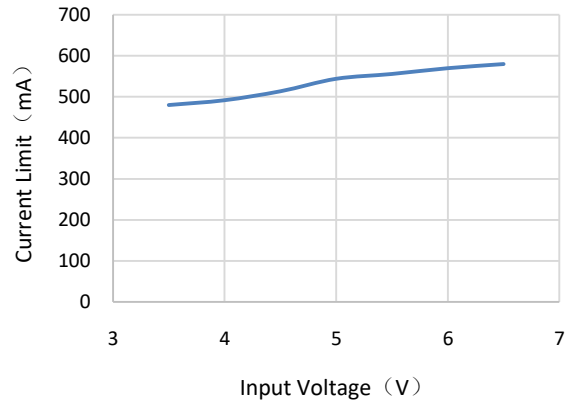

EN ON / OFF

$V_{EN}=0V$ to $4.5V$

$I_{OUT}=10mA$

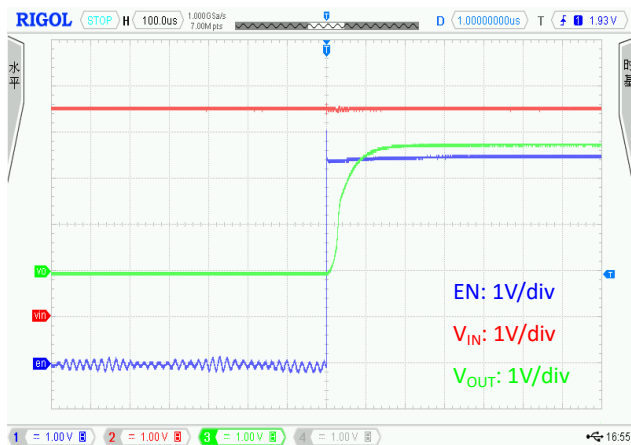

$V_{EN}=4.5V$ to $0V$

$I_{OUT}=10mA$



Power ON / OFF

$V_{IN}=0V$ to $4.5V$

$I_{OUT}=10mA$



$V_{IN}=4.5V$ to $0V$


$I_{OUT}=10mA$



Line Transient


$V_{IN}=4V$ to $5V$

$I_{OUT}=10mA$

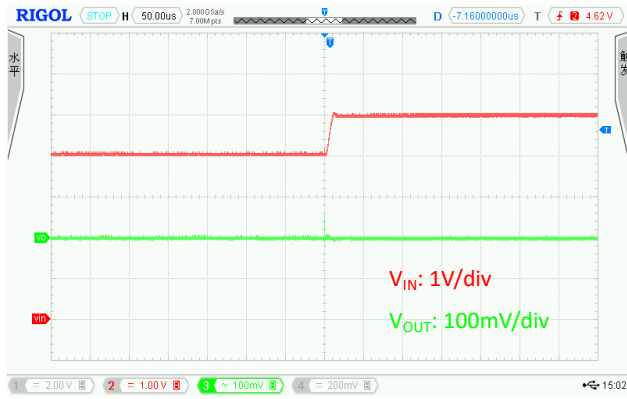

$V_{IN}=5V$ to $4V$


$I_{OUT}=10mA$

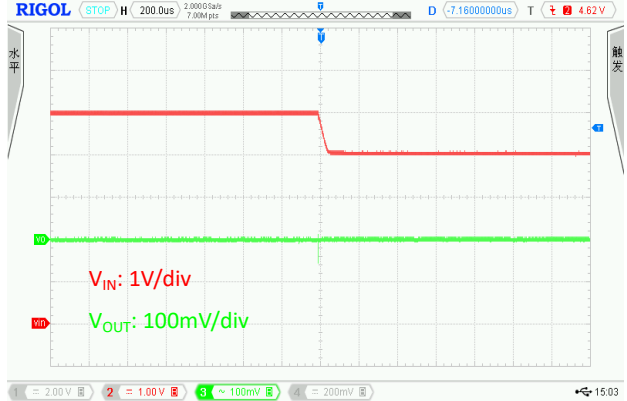


Load Transient

$V_{IN}=4.5V$


$I_{OUT}=1mA$ to $60mA$

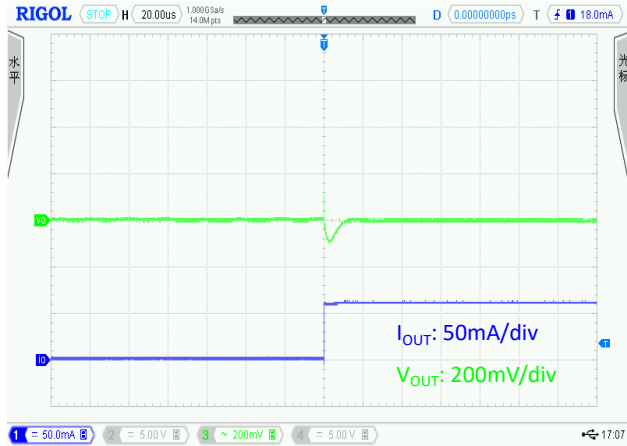


$V_{IN}=4.5V$ $I_{OUT}=60mA$ to $1mA$

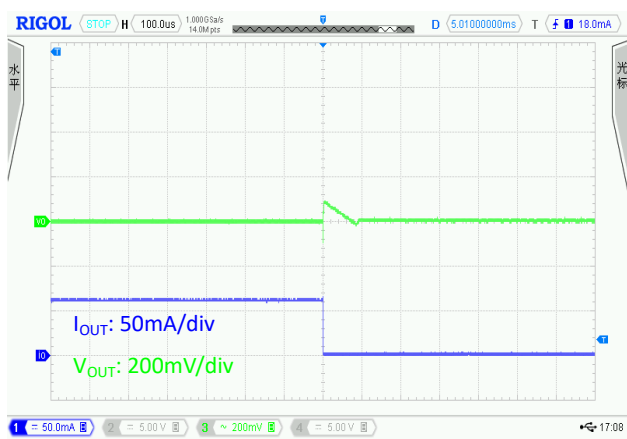

$V_{IN}=4.5V$ $I_{OUT}=1mA$ to $200mA$

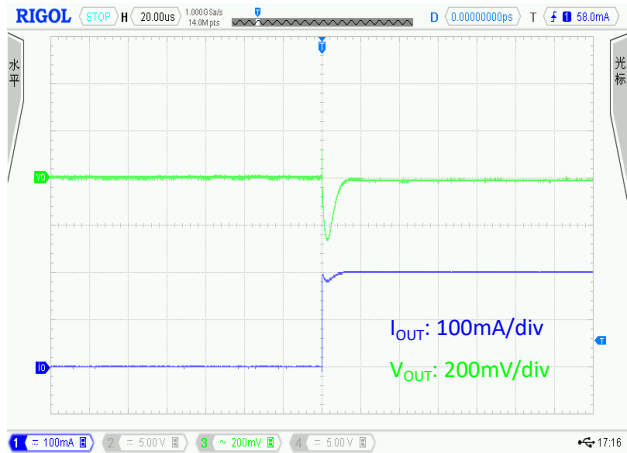


$V_{IN}=4.5V$ $I_{OUT}=200mA$ to $1mA$

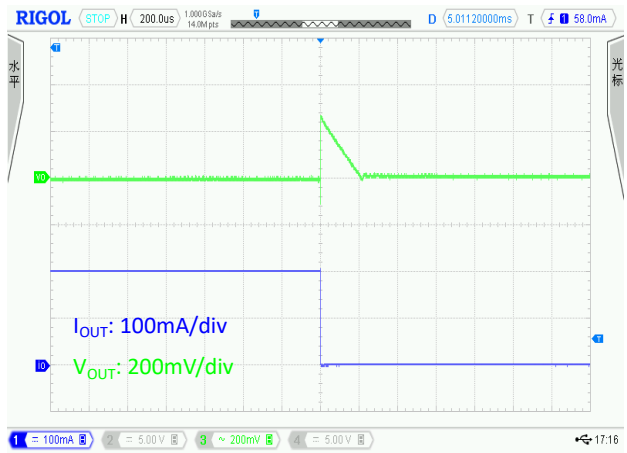

PACKAGE OUTLINE




Package	SOT23-5L	Devices per reel	3000Pcs	Unit	mm
---------	----------	------------------	---------	------	----

Package Dimension:

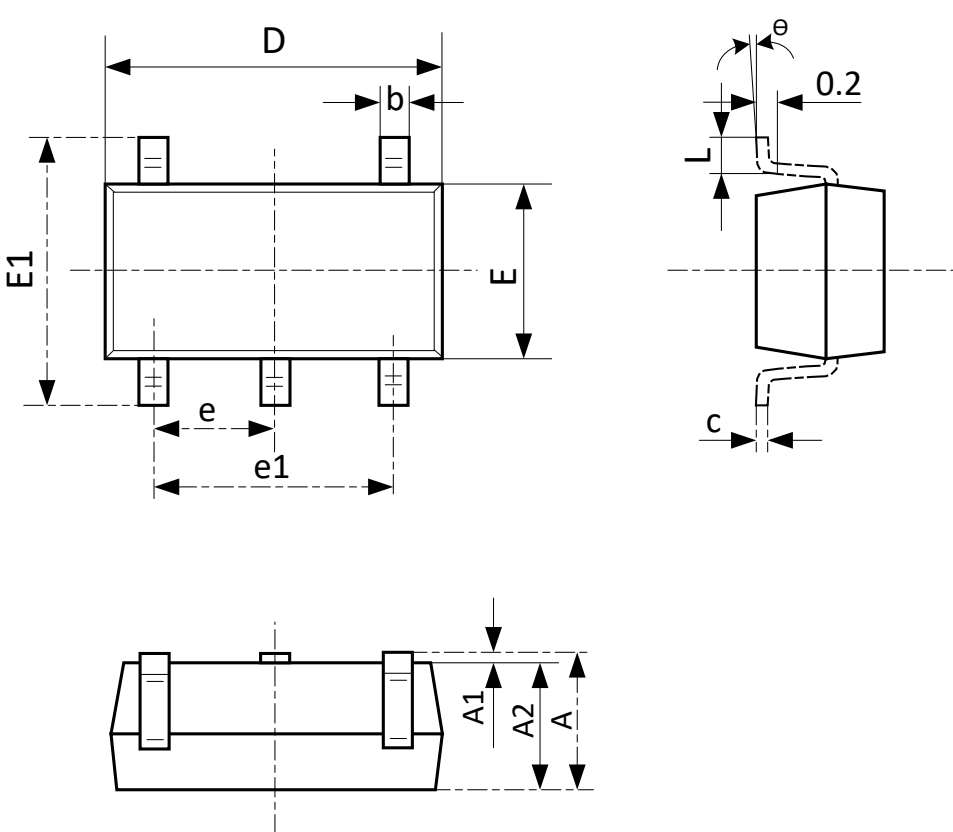

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°C	8°C	0°C	8°C


PACKAGE OUTLINE

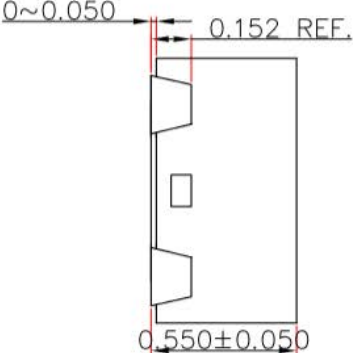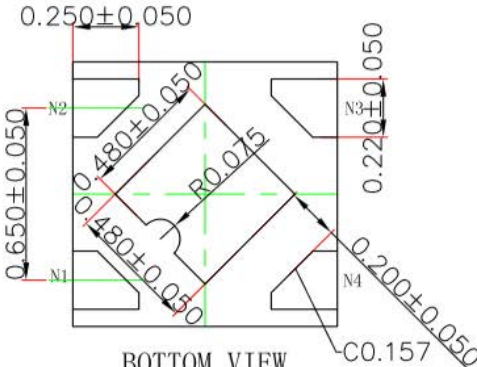Package	DFN1x1-4L	Devices per reel	10000Pcs	Unit	mm
Package Dimension #1:					
 TOP VIEW [顶视图]  SIDE VIEW 侧视图  BOTTOM VIEW 背视图					

PACKAGE OUTLINE


Package	DFN1x1-4L	Devices per reel	10000Pcs	Unit	mm
---------	-----------	------------------	----------	------	----

Package Dimension #2:

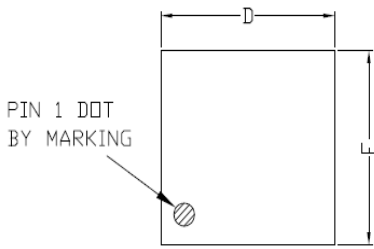


PIN 1 DOT
BY MARKING

TOP VIEW



PIN #1 IDENTIFICATION
CHAFMER 0.12MM

BOTTOM VIEW



SIDE VIEW

COMMON DIMENSIONS(MM)			
PKG.	X1EXTREME THIN		
REF.	MIN.	NOM.	MAX
A	0.40	-	0.50
A1	0.00	-	0.05
A3	0.125REF.		
D	0.95	1.00	1.05
E	0.95	1.00	1.05
b	0.15	0.20	0.25
L	0.15	0.25	0.35
D2	0.38	0.48	0.58
E2	0.38	0.48	0.58
e	0.65 BSC		

REMARK:
LEAD FINISH: NIPDAU

Tape

