


Low noise JFET dual operational amplifiers

Datasheet - production data

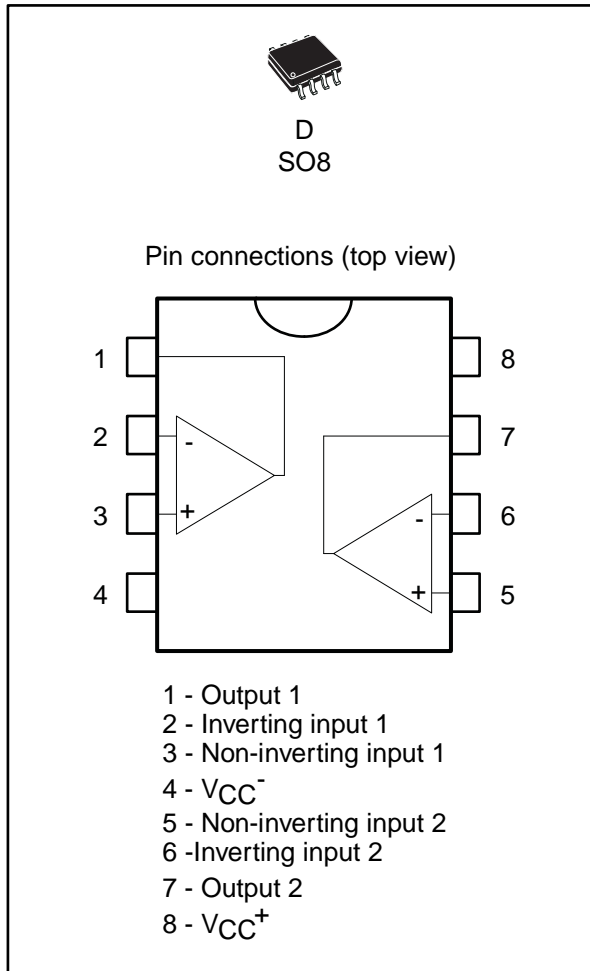

Features

- Wide common-mode (up to V_{CC}^+) and differential voltage range
- Low input bias and offset current
- Low noise $e_n = 15 \text{ nV}/\sqrt{\text{Hz}}$ (typ)
- Output short-circuit protection
- High input impedance JFET input stage
- Low harmonic distortion: 0.01 % (typical)
- Internal frequency compensation
- Latch-up free operation
- High slew rate: $16 \text{ V}/\mu\text{s}$ (typ)

Related products

- See TL071 for single op amp version
- See TL074 for quad op amp version

Description

The TL072, TL072A, and TL072B are high speed JFET input dual operational amplifiers incorporating well-matched, high-voltage JFET and bipolar transistors in a monolithic integrated circuit.


The devices feature high slew rates, low input bias and offset current, and low offset voltage temperature coefficients.

Contents

| | | |
|----------|--|-----------|
| 1 | Schematic diagram..... | 3 |
| 2 | Absolute maximum ratings and operating conditions | 4 |
| 3 | Electrical characteristics | 5 |
| 4 | Parameter measurement information | 10 |
| 5 | Typical application | 11 |
| 6 | Package information | 12 |
| | 6.1 SO8 package information..... | 12 |
| 7 | Ordering information..... | 14 |
| 8 | Revision history | 15 |

1 Schematic diagram

Figure 1: Schematic diagram

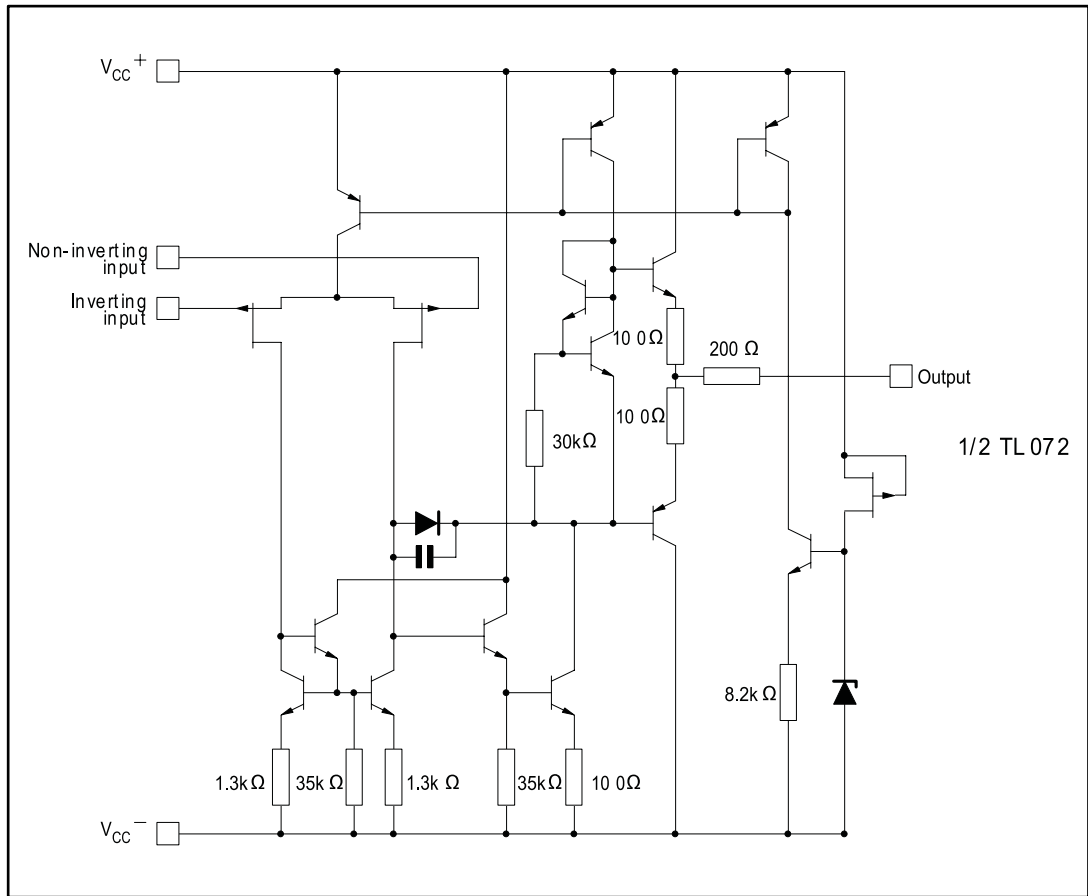

2 Absolute maximum ratings and operating conditions

Table 1: Absolute maximum ratings

| Symbol | Parameter | TL072I, AI, BI | TL072C, AC, BC | Unit |
|------------|--|----------------|----------------|------|
| V_{CC} | Supply voltage ⁽¹⁾ | ±18 | | V |
| V_{in} | Input voltage ⁽²⁾ | ±15 | | |
| V_{id} | Differential input voltage ⁽³⁾ | ±30 | | |
| R_{thja} | Thermal resistance junction to ambient, SO8 ⁽⁴⁾ | 125 | | °C/W |
| R_{thjc} | Thermal resistance junction to case, SO8 ⁽⁴⁾ | 40 | | |
| | Output short-circuit duration ⁽⁵⁾ | Infinite | | |
| T_{stg} | Storage temperature range | -65 to +150 | | °C |
| ESD | HBM: human body model ⁽⁶⁾ | 1 | | kV |
| | MM: machine model ⁽⁷⁾ | 200 | | V |
| | CDM: charged device model ⁽⁸⁾ | 1.5 | | kV |

Notes:

⁽¹⁾All voltage values, except the differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between V_{CC}^+ and V_{CC}^- .

⁽²⁾The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.

⁽³⁾Differential voltages are the non-inverting input terminal voltages with respect to the inverting input terminal.

⁽⁴⁾Short-circuits can cause excessive heating. Destructive dissipation can result from simultaneous short-circuits on all amplifiers.

⁽⁵⁾The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

⁽⁶⁾Human body model: 100 pF discharged through a 1.5 kΩ resistor between two pins of the device. This is done for all couples of pin combinations with other pins floating.

⁽⁷⁾Machine model: a 200 pF cap is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5 W). This is done for all couples of pin combinations with other pins floating.

⁽⁸⁾Charged device model: all pins plus package are charged together to the specified voltage and then discharged directly to the ground.

Table 2: Operating conditions

| Symbol | Parameter | TL072I, AI, BI | TL072C, AC, BC | Unit |
|------------|--------------------------------------|----------------|----------------|------|
| V_{CC} | Supply voltage | 6 to 36 | | V |
| T_{oper} | Operating free-air temperature range | -40 to +125 | 0 to +70 | °C |

3 Electrical characteristics

Table 3: Electrical characteristics at VCC = ±15 V, Tamb = +25 °C (unless otherwise specified).

| Symbol | Parameter | TL072I, AC, AI, BC, BI | | | TL072C | | | Unit | |
|----------------------|--|------------------------|------------|------|--------|------------|------|-------|----|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | | |
| V _{io} | Input offset voltage (R _s = 50 Ω) T _{amb} = +25 °C | TL072 | | 3 | 10 | | 3 | 10 | mV |
| | | TL072A | | 3 | 6 | | | | |
| | | TL072B | | 1 | 3 | | | | |
| | Input offset voltage (R _s = 50 Ω) T _{min} ≤ T _{amb} ≤ T _{max} | TL072 | | | 13 | | | 13 | |
| | | TL072A | | | 7 | | | | |
| | | TL072B | | | 5 | | | | |
| ΔV _{io} /ΔT | Input offset voltage drift | | 10 | | | 10 | | μV/°C | |
| I _{io} | Input offset current, T _{amb} = +25 °C ⁽¹⁾ | | 5 | 100 | | 5 | 100 | pA | |
| | Input offset current, T _{min} ≤ T _{amb} ≤ T _{max} | | | 4 | | | 10 | nA | |
| I _{ib} | Input bias current, T _{amb} = +25 °C ⁽¹⁾ | | 20 | 200 | | 20 | 200 | pA | |
| | Input bias current, T _{min} ≤ T _{amb} ≤ T _{max} ⁽¹⁾ | | | 20 | | | 20 | nA | |
| A _{vd} | Large signal voltage gain (R _L = 2 kΩ, V _o = ±10 V), T _{amb} = +25 °C | 50 | 200 | | 25 | 200 | | V/mV | |
| | Large signal voltage gain (R _L = 2 kΩ, V _o = ±10 V), T _{min} ≤ T _{amb} ≤ T _{max} | 25 | | | 15 | | | | |
| SVR | Supply voltage rejection ratio (R _S = 50 Ω), T _{amb} = +25 °C | 80 | 86 | | 70 | 86 | | dB | |
| | Supply voltage rejection ratio (R _S = 50 Ω), T _{min} ≤ T _{amb} ≤ T _{max} | 80 | | | 70 | | | | |
| I _{CC} | Supply current, no load, T _{amb} = +25 °C | | 1.4 | 2.5 | | 1.4 | 2.5 | mA | |
| | Supply current, no load, T _{min} ≤ T _{amb} ≤ T _{max} | | | 2.5 | | | 2.5 | | |
| V _{icm} | Input common mode voltage range | ±11 | -12 to +15 | | ±11 | -12 to +15 | | V | |
| CMR | Common mode rejection ratio (R _S = 50 Ω), T _{amb} = +25 °C | 80 | 86 | | 70 | 86 | | dB | |
| | Common mode rejection ratio (R _S = 50 Ω), T _{min} ≤ T _{amb} ≤ T _{max} | 80 | | | 70 | | | | |
| I _{os} | Output short-circuit current, T _{amb} = +25 °C | 10 | 40 | 60 | 10 | 40 | 60 | mA | |
| | Output short-circuit current, T _{min} ≤ T _{amb} ≤ T _{max} | 10 | | 60 | 10 | | 60 | | |
| ±V _{opp} | Output voltage swing, T _{amb} = +25 °C | R _L = 2 kΩ | 10 | 12 | | 10 | 12 | V | |
| | | R _L = 10 kΩ | 12 | 13.5 | | 12 | 13.5 | | |
| | Output voltage swing, T _{min} ≤ T _{amb} ≤ T _{max} | R _L = 2 kΩ | 10 | | | 10 | | | |
| | | R _L = 10 kΩ | 12 | | | 12 | | | |

Electrical characteristics

TL072, TL072A, TL072B

| Symbol | Parameter | TL072I, AC, AI, BC, BI | | | TL072C | | | Unit |
|-----------------|---|------------------------|-----------|------|--------|-----------|------|--------------------------------------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| SR | Slew rate, $V_{in} = 10\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, unity gain | 8 | 16 | | 8 | 16 | | V/ μs |
| t_r | Rise time, $V_{in} = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, unity gain | | 0.1 | | | 0.1 | | μs |
| K_{ov} | Overshoot, $V_{in} = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, unity gain | | 10 | | | 10 | | % |
| GBP | Gain bandwidth product, $V_{in} = 10\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $F = 100\text{ kHz}$ | 2.5 | 4 | | 2.5 | 4 | | MHz |
| R_i | Input resistance | | 10^{12} | | | 10^{12} | | Ω |
| THD | Total harmonic distortion, $F = 1\text{ kHz}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $A_v = 20\text{ dB}$, $V_o = 2\text{ V}_{pp}$ | | 0.01 | | | 0.01 | | % |
| e_n | Equivalent input noise voltage, $R_S = 100\ \Omega$, $F = 1\text{ kHz}$ | | 15 | | | 15 | | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |
| ϕ_m | Phase margin | | 45 | | | 45 | | degrees |
| V_{o1}/V_{o2} | Channel separation, $A_v = 100$ | | 120 | | | 120 | | dB |

Notes:

(1) The input bias currents are junction leakage currents which approximately double for every 10 °C increase in the junction temperature.

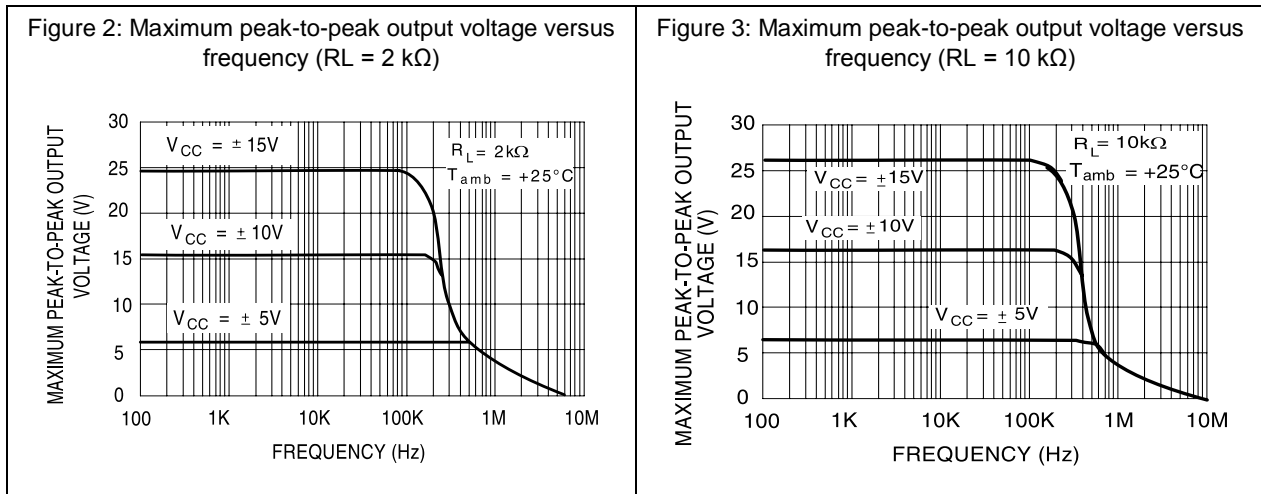


Figure 4: Maximum peak-to-peak output voltage versus frequency

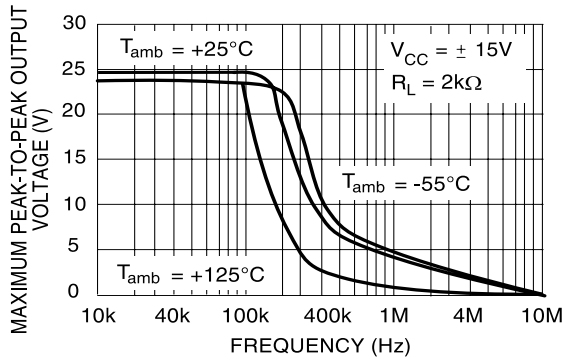


Figure 5: Maximum peak-to-peak output voltage versus free air temperature

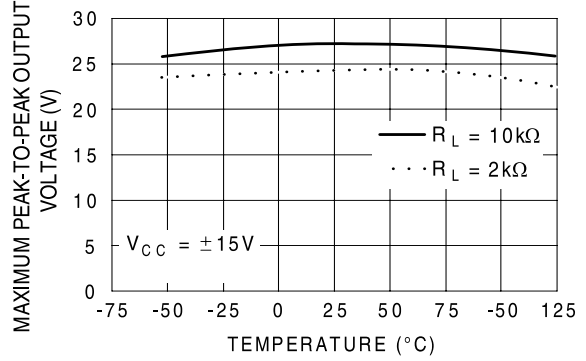


Figure 6: Maximum peak-to-peak output voltage versus load resistance

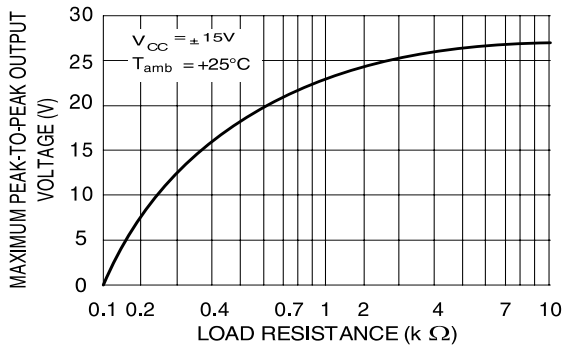


Figure 7: Maximum peak-to-peak output voltage versus supply voltage

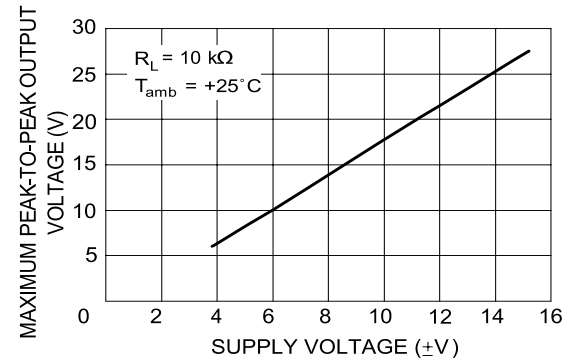


Figure 8: Input bias current versus free air temperature

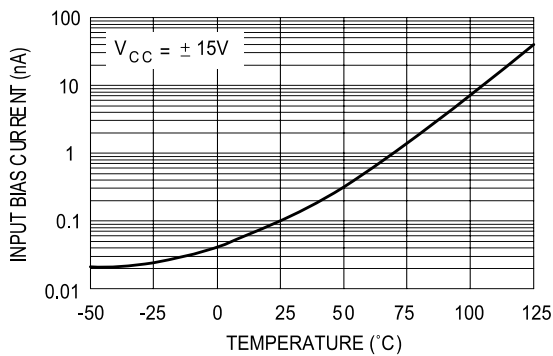


Figure 9: Large signal differential voltage amplification versus free air temperature

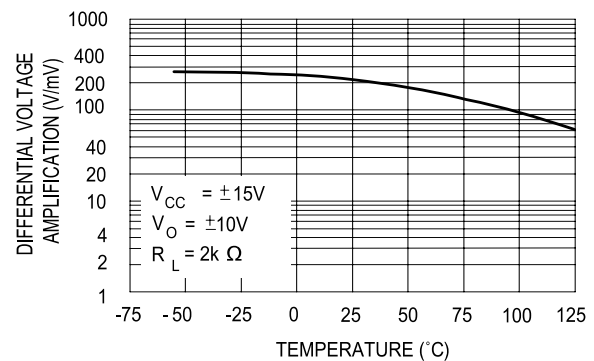


Figure 10: Large signal differential voltage amplification and phase shift versus frequency

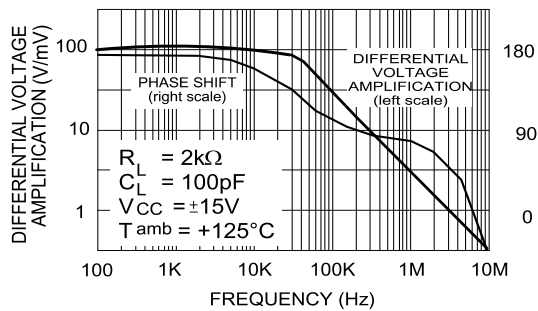


Figure 11: Total power dissipation versus free air temperature

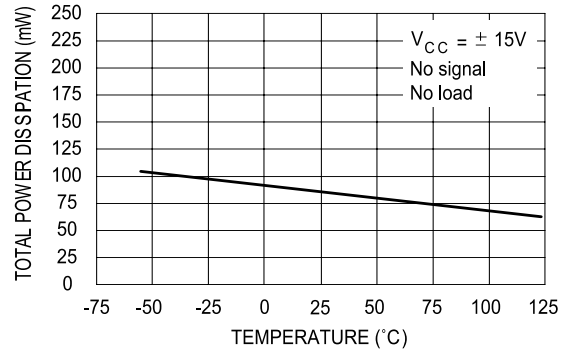


Figure 12: Supply current per amplifier versus free air temperature

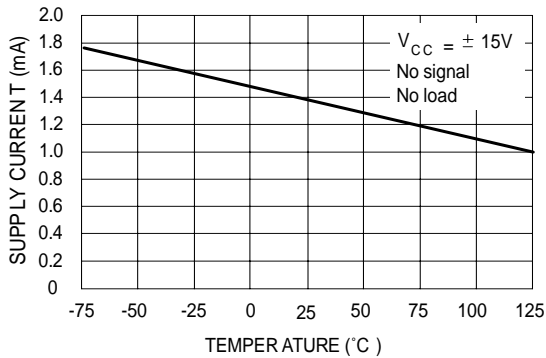


Figure 13: Common mode rejection ratio versus free air temperature

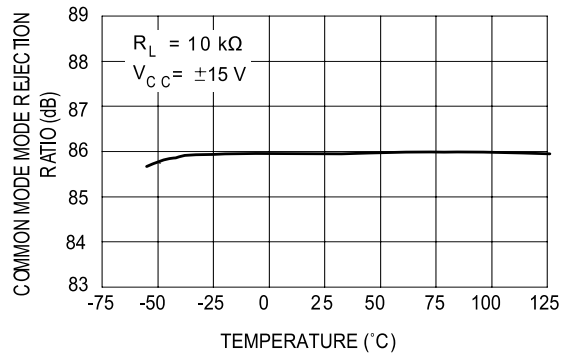


Figure 14: Voltage follower large signal pulse response

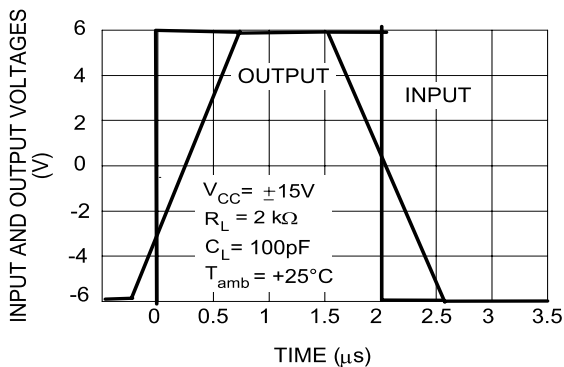


Figure 15: Output voltage versus elapsed time

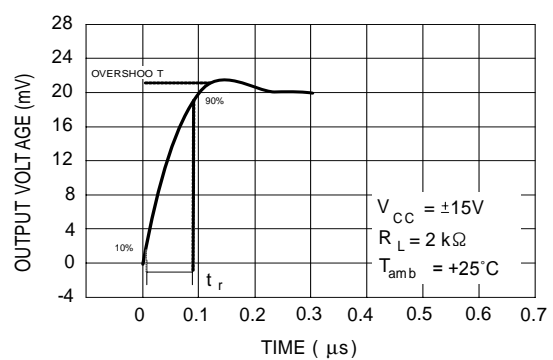


Figure 16: Equivalent input noise voltage versus frequency


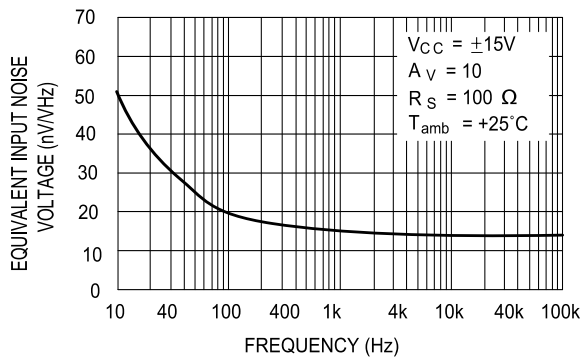


Figure 17: Total harmonic distortion versus frequency

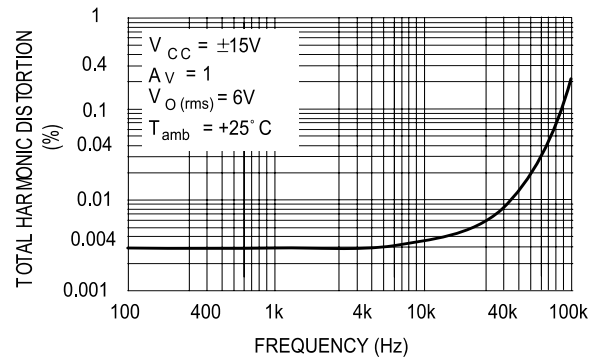

4 Parameter measurement information

Figure 18: Voltage follower



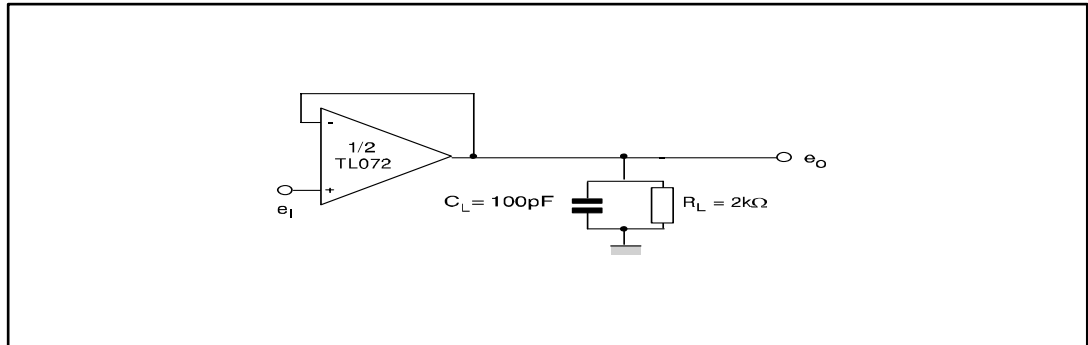


Figure 19: Gain-of-10 inverting amplifier

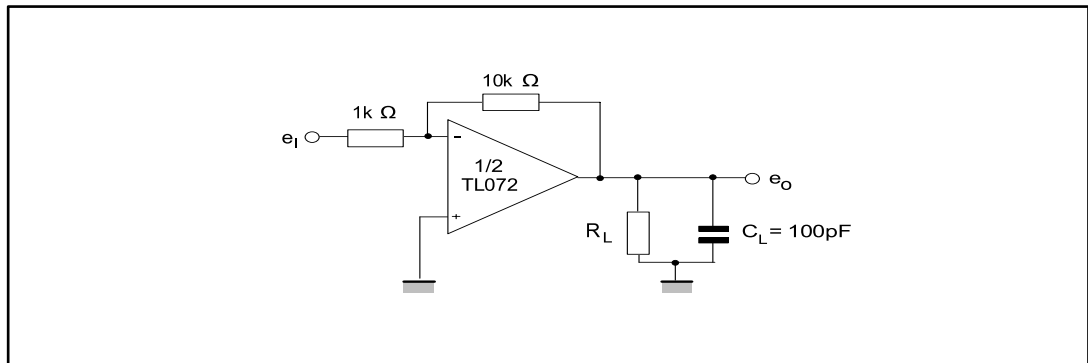

5 Typical application

Figure 20: 100 kHz quadruple oscillator

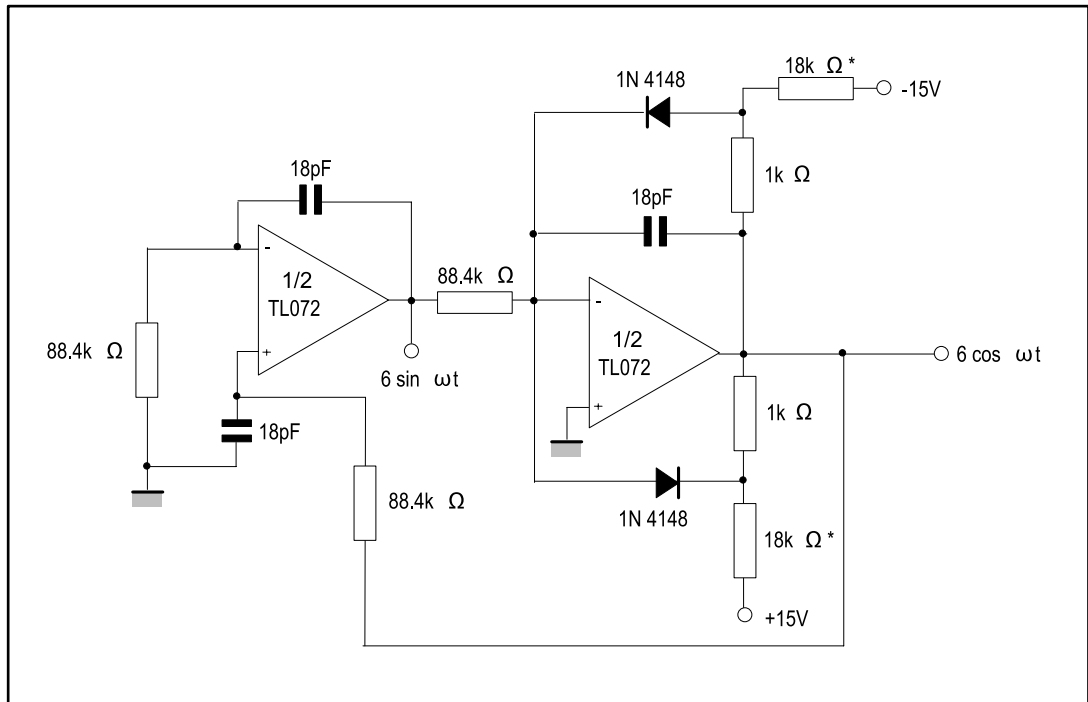

1. The resistor values of [Figure 20](#) may be adjusted for a symmetrical output

6 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

6.1 SO8 package information

Figure 21: SO8 package mechanical drawing

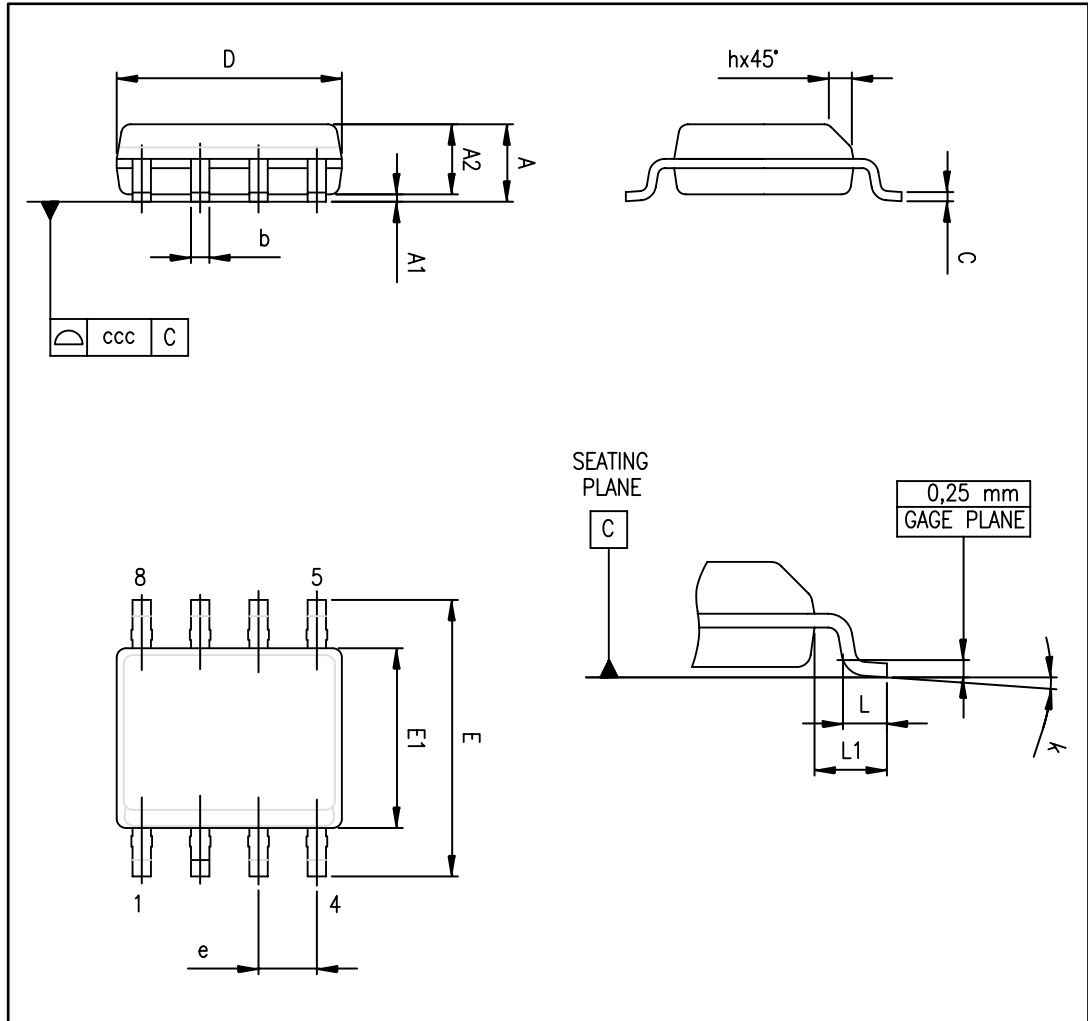


Table 4: SO8 package mechanical data

| Ref. | Dimensions | | | | | |
|------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | | 1.75 | | | 0.069 |
| A1 | 0.10 | | 0.25 | 0.004 | | 0.010 |
| A2 | 1.25 | | | 0.049 | | |
| b | 0.28 | | 0.48 | 0.011 | | 0.019 |
| c | 0.17 | | 0.23 | 0.007 | | 0.010 |
| D | 4.80 | 4.90 | 5.00 | 0.189 | 0.193 | 0.197 |
| E | 5.80 | 6.00 | 6.20 | 0.228 | 0.236 | 0.244 |
| E1 | 3.80 | 3.90 | 4.00 | 0.150 | 0.154 | 0.157 |
| e | | 1.27 | | | 0.050 | |
| h | 0.25 | | 0.50 | 0.010 | | 0.020 |
| L | 0.40 | | 1.27 | 0.016 | | 0.050 |
| k | 1° | | 8° | 1° | | 8° |
| ccc | | | 0.10 | | | 0.004 |

7 Ordering information

Table 5: Order codes

| Order code | Temperature range | Package | Packing | Marking |
|---------------------------|-------------------|------------------------|---------------|---------|
| TL072IDT | -40 °C, +125 °C | SO8 | Tape and reel | 072I |
| TL072AIDT | | | | 072AI |
| TL072BIDT | | | | 072BI |
| TL072CDT | 0 °C, +70 °C | | | 072C |
| TL072ACDT | | | | 072AC |
| TL072BCDT | | | | 072BC |
| TL072IYDT ⁽¹⁾ | -40 °C, +125 °C | SO8 (automotive grade) | | 072IY |
| TL072AIYDT ⁽¹⁾ | | | | 072AIY |
| TL072BIYDT ⁽¹⁾ | | | | 072BIY |

Notes:

⁽¹⁾ Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 & Q002 or equivalent.

8 Revision history

Table 6: Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 28-Mar-2001 | 1 | Initial release. |
| 02-Apr-2004 | 2 | Correction to pin connection diagram on cover page. Unpublished. |
| 04-Dec-2006 | 3 | Modified graphics in package mechanical data. |
| 06-Mar-2007 | 4 | Expanded order codes table and added automotive grade order codes. See Table 5: "Order codes" . Added thermal resistance and ESD tolerance in Table 1: "Absolute maximum ratings" . Added Table 2: "Operating conditions" . Updated package mechanical data to make it compliant with the latest JEDEC standards. |
| 13-Mar-2008 | 5 | ESD HBM value modified in AMR table. Re-ordered order codes table. Removed TL072BIY and TL072AIY order codes from order code table. Corrected footnote for automotive grade order codes in order codes table. |
| 15-Jul-2008 | 6 | Removed information concerning military temperature range (TL072Mx, TL072AMx, TL072BMx). Added order codes for automotive grade products in Table 5: "Order codes" . |
| 04-Jul-2012 | 7 | Removed part numbers TL072IYD, TL072AIYD, TL072BIYD. Updated Table 5: "Order codes" . |
| 19-Jun-2014 | 8 | Removed DIP8 package Added Related products Table 2: "Operating conditions" : temperature range for "I" versions changed from "-40 °C, +105 °C" to "-40 °C, +125 °C". Table 3: Electrical characteristics at VCC = ±15 V, Tamb = +25 °C (unless otherwise specified) : replaced DV_{io} with $\Delta V_{io}/\Delta T$. Table 5: "Order codes" : temperature range for "I" version order codes changed from "-40 °C, +105 °C" to "-40 °C, +125 °C"; removed tube packing and related order codes. Updated disclaimer |

Please Read Carefully

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics:

[TL072ACN](#) [TL072ACD](#) [TL072CD](#) [TL072CN](#) [TL072IN](#) [TL072ID](#) [TL072IDT](#) [TL072ACDT](#) [TL072CDT](#) [TL072BCDT](#)
[TL072BIN](#) [TL072BIDT](#) [TL072BIYDT](#)