

SPECIFICATION

产品规格书

REFOND P/N 产品型号
RF-MTCGWxZ18242-A0

☒ R&D 研发

☐ Mass Product 量产供货

Contents 目录

1.Description 产品介绍	3
1.1General Description 产品描述	3
1.2Features 产品特征	3
1.3Application 产品应用	3
1.4Size chart 产品尺寸图	4
1.5Product Parameters 产品参数	4
1.6LED Strip Schematic And Interface Definition 灯带电性规格	5
2.Packaging 产品包装	5
2.1Packaging Specification 包装规格	5
2.2Label Form Specification 标签规格	5
2.3Moisture Resistant Packing 防潮包装	5
2.4Cardboard Box 包装纸箱	6
3.Strip Reliability Test 灯条可靠性实验	6
4.Product use and installation instructions 产品使用安装说明	7
5.Product use precautions 产品使用注意事项	8

REFOND

1. Description 产品介绍

1.1 General Description 产品描述



Notes 备注: The product consists of SMD5050RGBW LED(60PCS/M) white light and FPC soft plate composed of DC24V constant pressure LED soft lamp band.

产品由 SMD5050RGBW LED(60PCS/M)和 FPC 软板组成 DC24V 恒压 LED 软灯带。

1.2 Features 产品特征


- ▶ LED lamp with light source is 5050RGBW, with high density, high luminous efficiency, less heat, no mercury, environmental performance;
LED 灯带的光源是 5050RGBW, 具有高发光效率, 较少的热量, 无汞, 环保的性能;
- ▶ RGB light belt with color diversity selection, color effects can be selected: monochrome red light, monochrome green light, monochrome blue light, monochrome white light, monochrome gradient, multi-color gradient, multi-color transformation, 7 color cycle and so on;
RGB 灯带具有颜色多样性选择, 颜色效果可选: 单色红光、单色绿光、单色蓝光、单色白光、单色渐变、多色渐变、多色变换、7 彩循环等等;
- ▶ Low voltage DC24V constant voltage driving to ensure safe and reliable running ,Basically covers matching market RGB controller use;
低压 DC24V 恒压驱动, 确保运行安全可靠, 基本涵盖匹配市面上 RGB 控制器使用;
- ▶ RoHS, CE compliant.
符合 CE,RoHS.

1.3 Application 产品应用

- ▶ Home decoration (staircase lighting, hall aisle lighting, lighting decoration, edge hook decoration)
家居装饰 (阶梯照明、大厅走道照明、灯光装饰、边缘勾边装饰)
- ▶ Event venue decoration, exhibition venue decoration, exhibition hall decoration, showcases, window, props and other decorative lighting applications
活动会场布景、展览会场装饰、展馆装饰、展柜、橱窗、道具等应用装饰照明
- ▶ Linear light source and other applications
线型灯具光源等应用
- ▶ General use.

其他应用

1.4Size chart 产品尺寸图

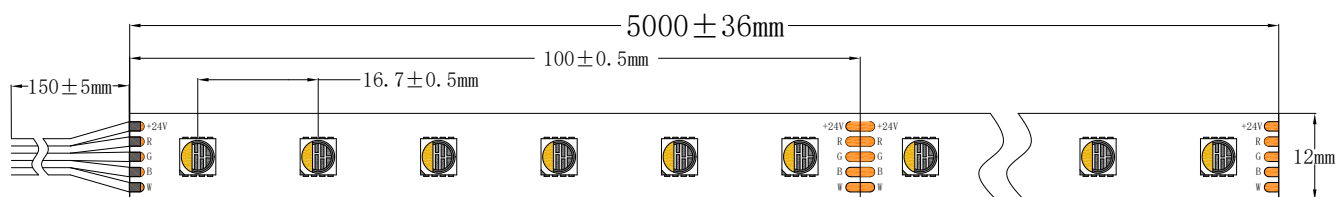

	Dimension 尺寸	Specification 规格	Tolerance 公差
L	Strip Length 灯条长度	5000	±36
W	Strip PCB Width 灯条 PCB 宽度	12	±0.2
H1	PCB Thickness PCB 厚度	0.25	±0.15
H2	Height of Strip 灯条高度	1.8	±0.1

Notes 备注: The product is 500mm single, cascade 10(5m), 6PCS lamps as a group can be cut, single end out of the line, can be arbitrary stitching.

产品单条 500mm, 级联 10 条 (5m), 6PCS 灯为一组可剪, 单端出线, 可任意拼接.


1.5Product Parameters 产品参数

Refond PN 瑞丰产品料号	灯条参数Strip Characteristics							
	CCT/Wave 色温/波长 (K/nm)	Viewing Angle 发光角度 (°)	CRI 显指 (Ra)	FLUX 光通量 (lm/M)	Eff 光效 (lm/w)	VF 电压 (V)	IF 电流 (mA)	Power 功率 (W/M)
	Typ	Typ	Typ	Typ	Typ	Typ	Typ	Typ
RF-MTCGW3Z18242-A0 IP20	RGBW3 000K	120	—	—	—	24	750	18
RF-MTCGW4Z18242-A0 IP20	RGBW4 000K	120	—	—	—	24	750	18

Notes 备注:


- 1 meter test parameter.1 米的测试参数
- The tolerance of the above parameters is ± 10%.上述标准参数误差范围在±10%.

1.6 LED Strip Schematic And Interface Definition 灯带电性规格

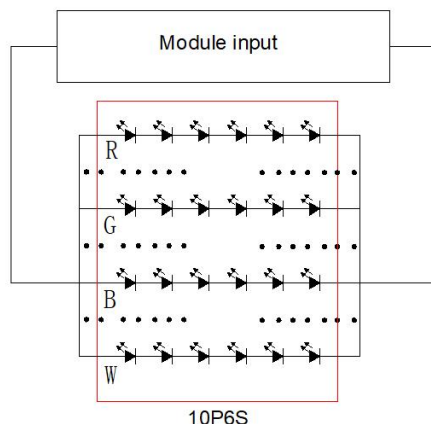

2. Packaging 产品包装

2.1 Packaging Specification 包装规格

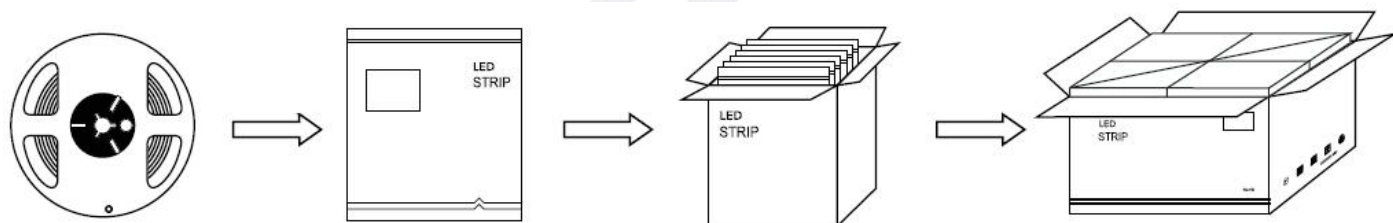

2.2 Label Form Specification 标签规格

Refond LED Flexible Strips

P/N: RF-MTCGW3Z18242-A0

Item code:


LED TYPE: 5050 Color: RGBW***K

Voltage: 24V Power: 18W/M


IP Rate: IP20 Length: 5M/Reel

Date: 2024-xx-xx

2.3 Moisture Resistant Packing 防潮包装

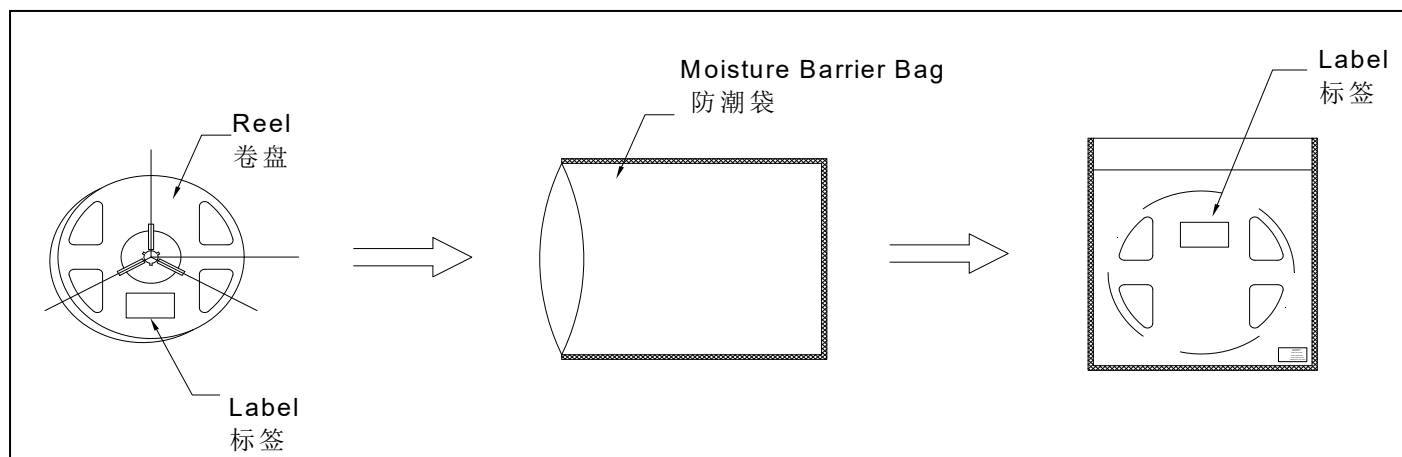

2.4 Cardboard Box 包装纸箱

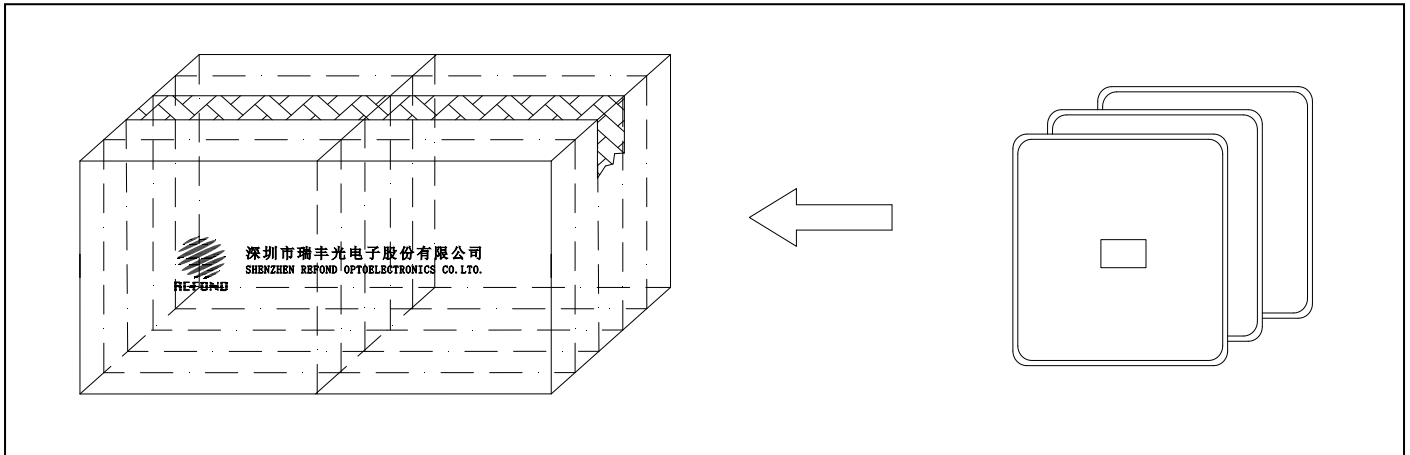

3.Strip Reliability Test 灯条可靠性实验

Tab 3-1 Strip Reliability Test 灯条可靠性实验

Test Item/ 测试项目	Test Conditions/ 测试条件	Test Time/ 测试时长	Number of Test/ 测试数量	Judgement Criteria/ 判定标准
Operating Life at Room Temperature/ 常温测试	$T_A=25^{\circ}\text{C}$ DC24V $T_j<115^{\circ}\text{C}$	1000Hrs	0/6	1. $\Delta\Phi<30\%$, $V_f<110\%$, $\text{CIE}\Delta x/\Delta y<0.015$ 2.No catastrophic failure
Operating Life at High Temperature/ 高温测试	$T_A=80^{\circ}\text{C}$ DC24V $T_j<115^{\circ}\text{C}$	1000Hrs	0/6	
Operating Life at High Temperature and Humidity/ 高温高湿测试	70°C $R_H=90\%$ DC24V $T_j<115^{\circ}\text{C}$	1000Hrs	0/6	
Thermal Shock/ 冷热冲击	-40°C 15min $\uparrow\downarrow 10\text{S}$ 80°C 15min	300 cycle	0/6	No DeadLED

Notes 备注: The above reliability test is based on the results of Ruifeng's existing experimental platform LED light bar verified under good heat dissipation conditions. 以上可靠性测试是基于瑞丰现有实验平台 LED 灯条在良好散热条件验证下的结果。

4.Product use and installation instructions 产品使用安装说明

► Clean the installation surface.

将安装表面进行清理干净。

► Take out the flexible strip from the reel.

将柔性灯带从卷盘上取出。

► Place the products close to the mounting surface in sequence.


将产品依次序紧贴于安装表面。

► After mounting the flexible strip on the surface, connect the power supply lead of this product to the driver output terminal and do proper insulation treatment, paying attention to the polarity of the lead.

将柔性灯带安装表面后，将本产品供电导线连接到驱动器输出端中，并做适当绝缘处理，注意导线极性。

► After the product cable is installed, connect the driver to the test power to supply power to the driver.

产品连接线安装完成后，将驱动器连接到市电当中，对驱动器进行供电。

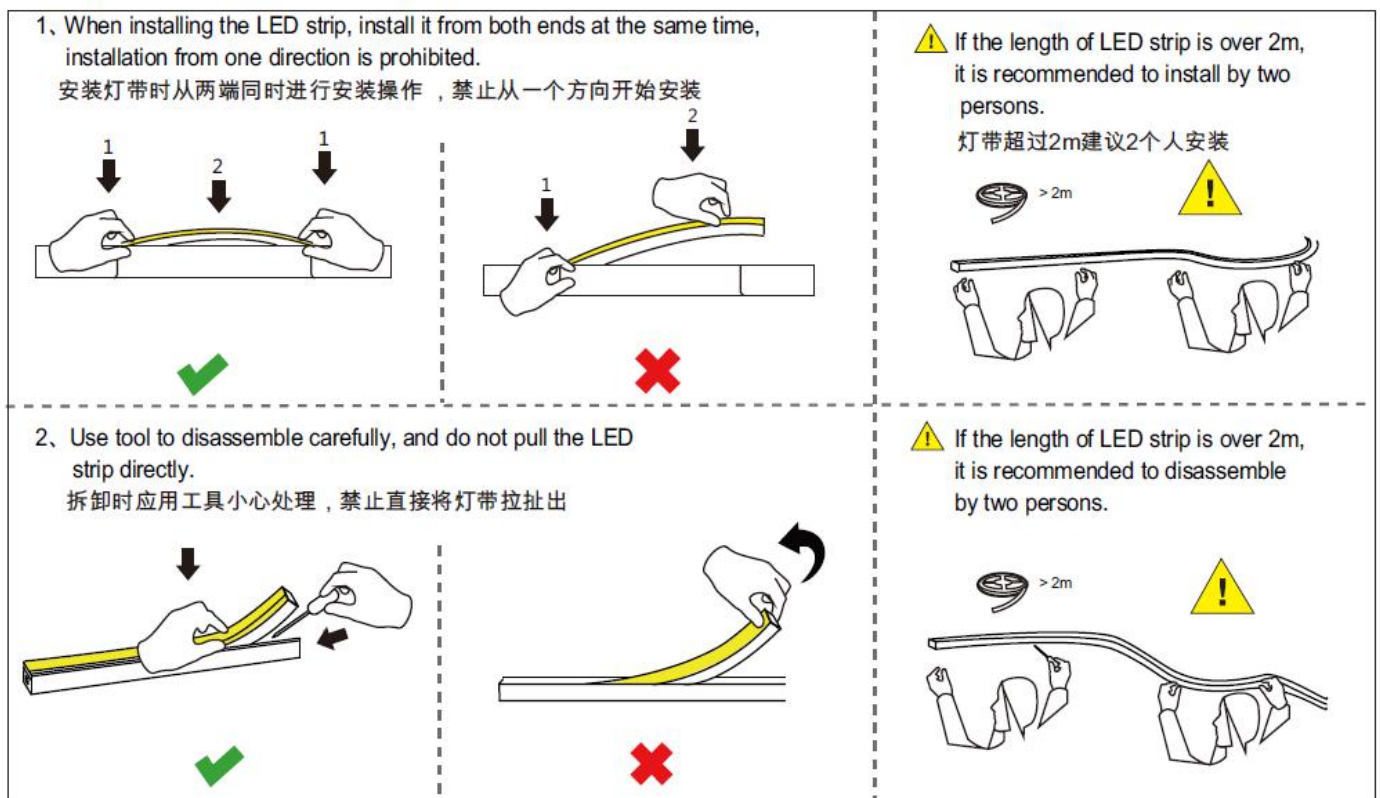

5.Product use precautions 产品使用注意事项

- ▶ The power supply voltage should be the same as that indicated on the LED flexible strip, and appropriate safety devices should be installed.
电源电压应与 LED 软灯带所标示一致，并安装适当保险装置。
- ▶ Observe if the positive and negative poles of the power supply before installation, and connect them properly, otherwise the light strip will be damaged.
安装前观察好电源正负极后，正确连接，否则会损坏灯带。
- ▶ Do not apply power to the light strip during the installation of the goods. To avoid short-circuit failure of the light strip caused by operating errors during operation, the power can only be connected under the condition of connection, installation and correctness.
请勿在安装货装配灯带过程中通电操作，避免作业过程中操作失误导致灯带短路失效，只有接驳、安装好且正确的情况下才能接通电源。
- ▶ The flexible LED strip can only be cut at the silk-screened scissors mark on the light strip, and other places will damage the circuit of the light strip and cause some of the lamp beads to fail.
LED 软灯带只能在灯带上丝印有剪刀标记处剪开，其他地方剪开会损坏灯带电路回路，导致部分灯珠不亮现象。
- ▶ The interface must be firm and free from short-circuit risks.
接口必须牢固，无短路隐患。





Declare 申明

This specification is written both in English and in Chinese and the latter is formal.

立口和校书以中其字不书字 其左中容以中其版本为注