

Characteristics



SRB05-E



SRB08-E






| | | | |
|------------------------|--------------------------|---------------|---------|
| Type | | SRB05-E | SRB08-E |
| Nominal load | Current | A | 12 |
| | Voltage | V | 300 |
| Dielectric strength | Between coil and contact | V/min | 4000 |
| | Between contacts | V/min | 2500 |
| Max. tightening torque | Nm | 1.0 | |
| Wire size | AWG/mm ² | 20-14/0.5-2.5 | |
| Ambient temperature | °C | -40~+85 | |
| Unit weight | g | 33 | 37 |


Accessories

| Socket | ID tag | Module |
|---------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| SRB05-E |  SR2P |  AMD |
| SRB08-E | | |

Clip selection table

| Relay H (mm) | 15 | 20 | 25 |
|--------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Clip Type |  SR15L |  SR20F |  SR25C |

Dimensions (mm)

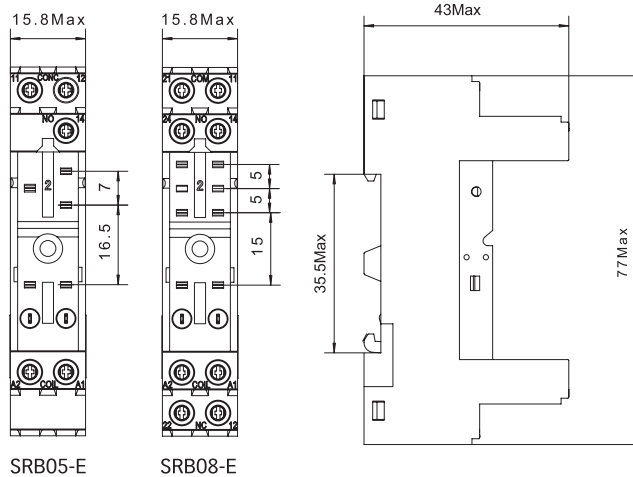

Connection Diagrams

