

### ■ 特性 Feature




- 體積小、耐熱性好  
Small size, good heat resistance
- 溫度係數小、阻值精度高  
Small temperature coefficient, high precision resistance
- 短時間超負載性能優  
Ultra-short-term load, excellent performance
- 可制作成無感型  
Can be made into non-sensitized

### ■ 訂貨方式 How To Order

KN	5W	P	12Ω	J
a	b	c	d	e

- a: 名稱 Product code
- b: 額定電力 Rated power
- c: 形式 Type
- d: 電阻值 Resistance value
- e: 容許誤差 Tolerance

### ■ 構造 & 尺寸 Construction & Dimension

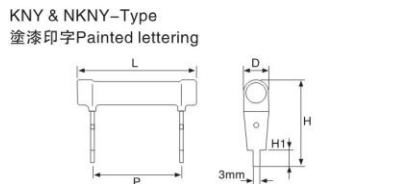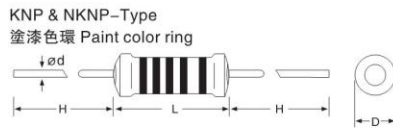


Type	Size	L ± 0.5	D ± 0.6	H ± 3	ød ± 0.05	Resistance range		Tolerance
						KNP	NKNP	
1/4W,1/2WS		6.5	2.4	27	0.48	0.1 Ω~30 Ω	0.05~15 Ω	F: ± 1% G: ± 2% J: ± 5%
1/2W,1WS		9.2	3.3	26	0.50	0.1 Ω~82 Ω	0.05~41 Ω	
1W,2WS		11	4.5	28/35	0.65	0.01 Ω~200 Ω	0.01~50 Ω	
2W,3WS		15	5.0	34	0.75	0.01 Ω~500 Ω	0.01~110 Ω	
3W,5WS		18	6.0	33	0.75	0.01 Ω~1K Ω	0.01~250 Ω	
5W,7WS		25	8.0	35	0.75	0.01 Ω~5K Ω	0.01~750 Ω	


Type	Size	L ± 1	D ± 0.6	H ± 3	ød ± 0.05	Resistance range		Tolerance
						KNP	NKNP	
7W		31	8	35	0.78	0.01~3K Ω	0.01~1.5K Ω	F: ± 1% G: ± 2% J: ± 5%
10W		41	8	35	0.78	0.01~8K Ω	0.01~4K Ω	
15W		52	8	35	0.78	0.01~10K Ω	0.01~5K Ω	
20W		61	8	35	0.78	0.01~12K Ω	0.01~6K Ω	
25W		61	8	35	0.78	0.01~12K Ω	0.01~6K Ω	
30W		70	8	35	0.78	0.01~15K Ω	0.01~7.5K Ω	

Type	Size	L ± 0.5	D ± 0.6	P ± 3	H ± 0.5	H1 ± 0.5	Resistance range		Tolerance
							KNP	NKNP	
5W		24	8	14	23	4.5	0.01 Ω~1.5K Ω	0.01 Ω~750 Ω	F: ± 1% G: ± 2% J: ± 5%
7W		31	8	22	23	4.5	0.01 Ω~3K Ω	0.01 Ω~1.5K Ω	
10W		41	8	32	23	4.5	0.01 Ω~8K Ω	0.01 Ω~4K Ω	
15W		52	8	42	23	4.5	0.01 Ω~10K Ω	0.01 Ω~5K Ω	
20W		61	8	52	23	4.5	0.01 Ω~12K Ω	0.01 Ω~6K Ω	
30W		70	8	62	23	4.5	0.01 Ω~15K Ω	0.01 Ω~7.5K Ω	

### ■ 表面溫升曲線 Electrical Performance

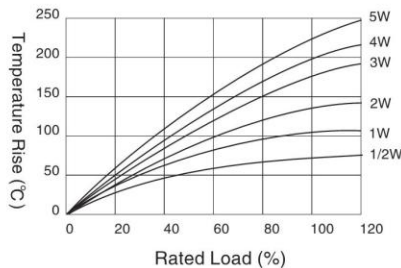

### ■ 降功率曲線 Derating Curve

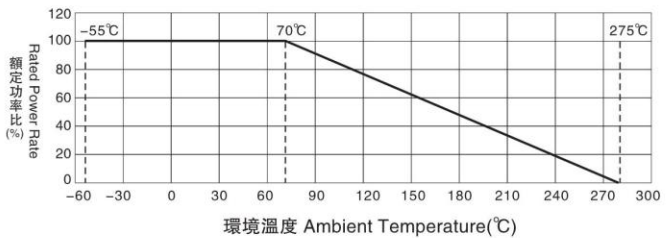

### ■ 電氣性能 Characteristics

Characteristics	Specifications	Test methods
T.C.R	± 300PPM/°C	$\frac{R2-R1}{R1*(T2-T1)} * 10^5$ (PPM)/°C
Load life	Resistance change rate ± (5%R+0.05 Ω) MAX With no evidence of mechanical damage.	Resistance change after 1000hrs operating at rated voltage with duty cycle of 1.5hrs ON 0.5hrs OFF at 70°C ± 2°C.
Short time over load	± (2%R+0.05 Ω)	2.5 times the rated voltage or maximum overload voltage (whichever is less), testing 5 seconds
Insulation resistance	500M Ω or more	V-block
Electric withstanding voltage	Resistance change ± (0.5%R ± 0.05 Ω). No evidence of flashover mechanical damage, Arcing or insulation breakdown.	Resistance shall be clamped in the trough of a 90 metallic v-block and shall be test at specified in the above list for 60 seconds.
Solder ability	95% coverage minimum	Test temperatures of solder 260 ± 5°C Dwell time in solder: 3 ± 0.5 sec
Join intensity	No terminal wire loosening and breakage shall occur.	Bending strength load 90° reciprocation twice