



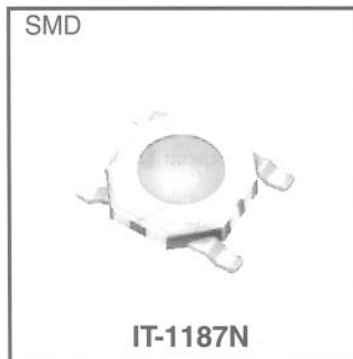


SMD Tact Switches

High-Density SMD



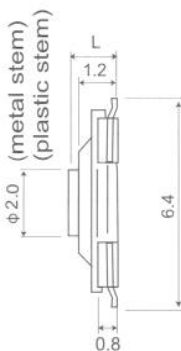


- 1.Rating: DC12V 50mA
- 2.Travel: $0.2 \pm 0.1\text{mm}$
- 3.Operating Force: $160 \pm 30\text{g}$
 $250 \pm 50\text{g}$
- 4.Contact Resistance: $100\text{m} \Omega$ Max.
- 5.Life: 100,000 Cycles Min.




- 1.Rating: DC12V 50mA
- 2.Travel: $0.25 \pm 0.1\text{mm}$
- 3.Operating Force: $160 \pm 30\text{g}$
 $250 \pm 50\text{g}$
- 4.Contact Resistance: $100\text{m} \Omega$ Max.
- 5.Life: 100,000 Cycles Min.

Model No.	Knob(L)
IT-1187	1.5
IT-1187A	4.3
IT-1187B	1.7
IT-1187C	3.1

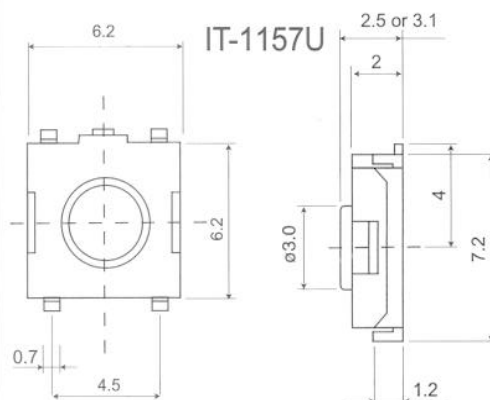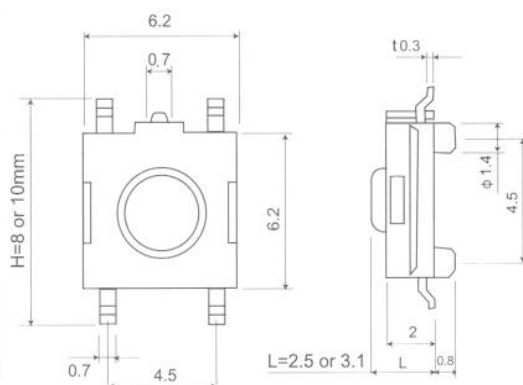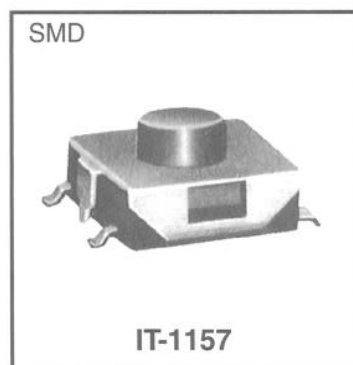

IT-1157 Series Order Code Explanation

IT-1157
IT-1157U

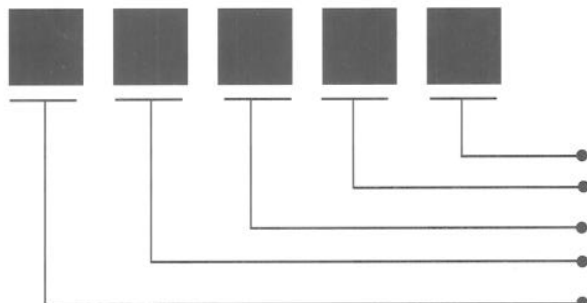

- 1.Rating: DC12V 50mA
- 2.Travel: $0.25 \pm 0.1\text{mm}$
- 3.Operating Force: 130, 160, $\pm 30\text{g}$, $250 \pm 50\text{g}$
- 4.Contact Resistance: $100\text{m} \Omega$ Max.
- 5.Life: 100,000 Cycles Min.

Item	Code
Operating Force	130g, 160g, 250g
With Ground Cover, Without Ground Cover	P, D
With Embossing Case, Without Embossing Case	E, N
Stem Height(L): 2.5mm, 3.1mm	S, H
Ter' Length(H): 8.0mm, 10.0mm	A, B