

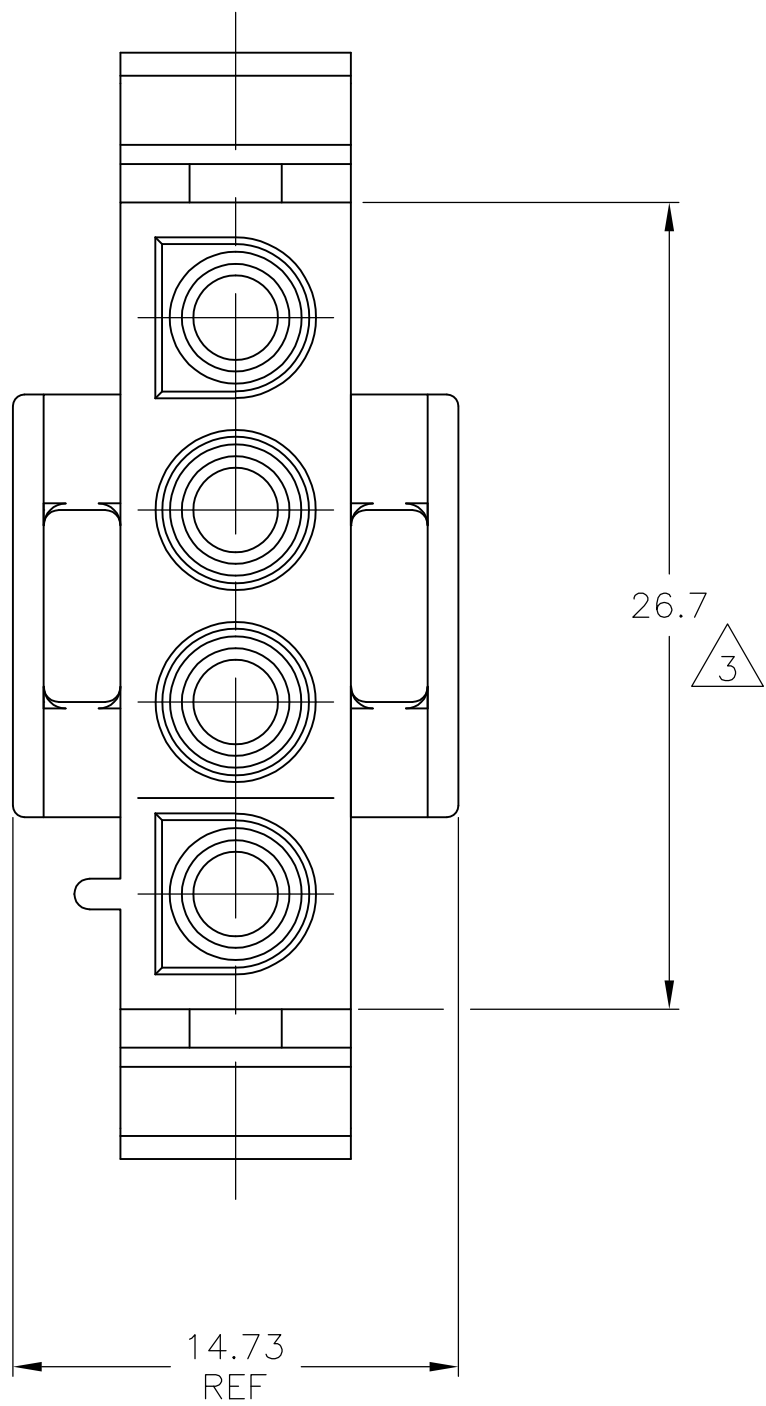
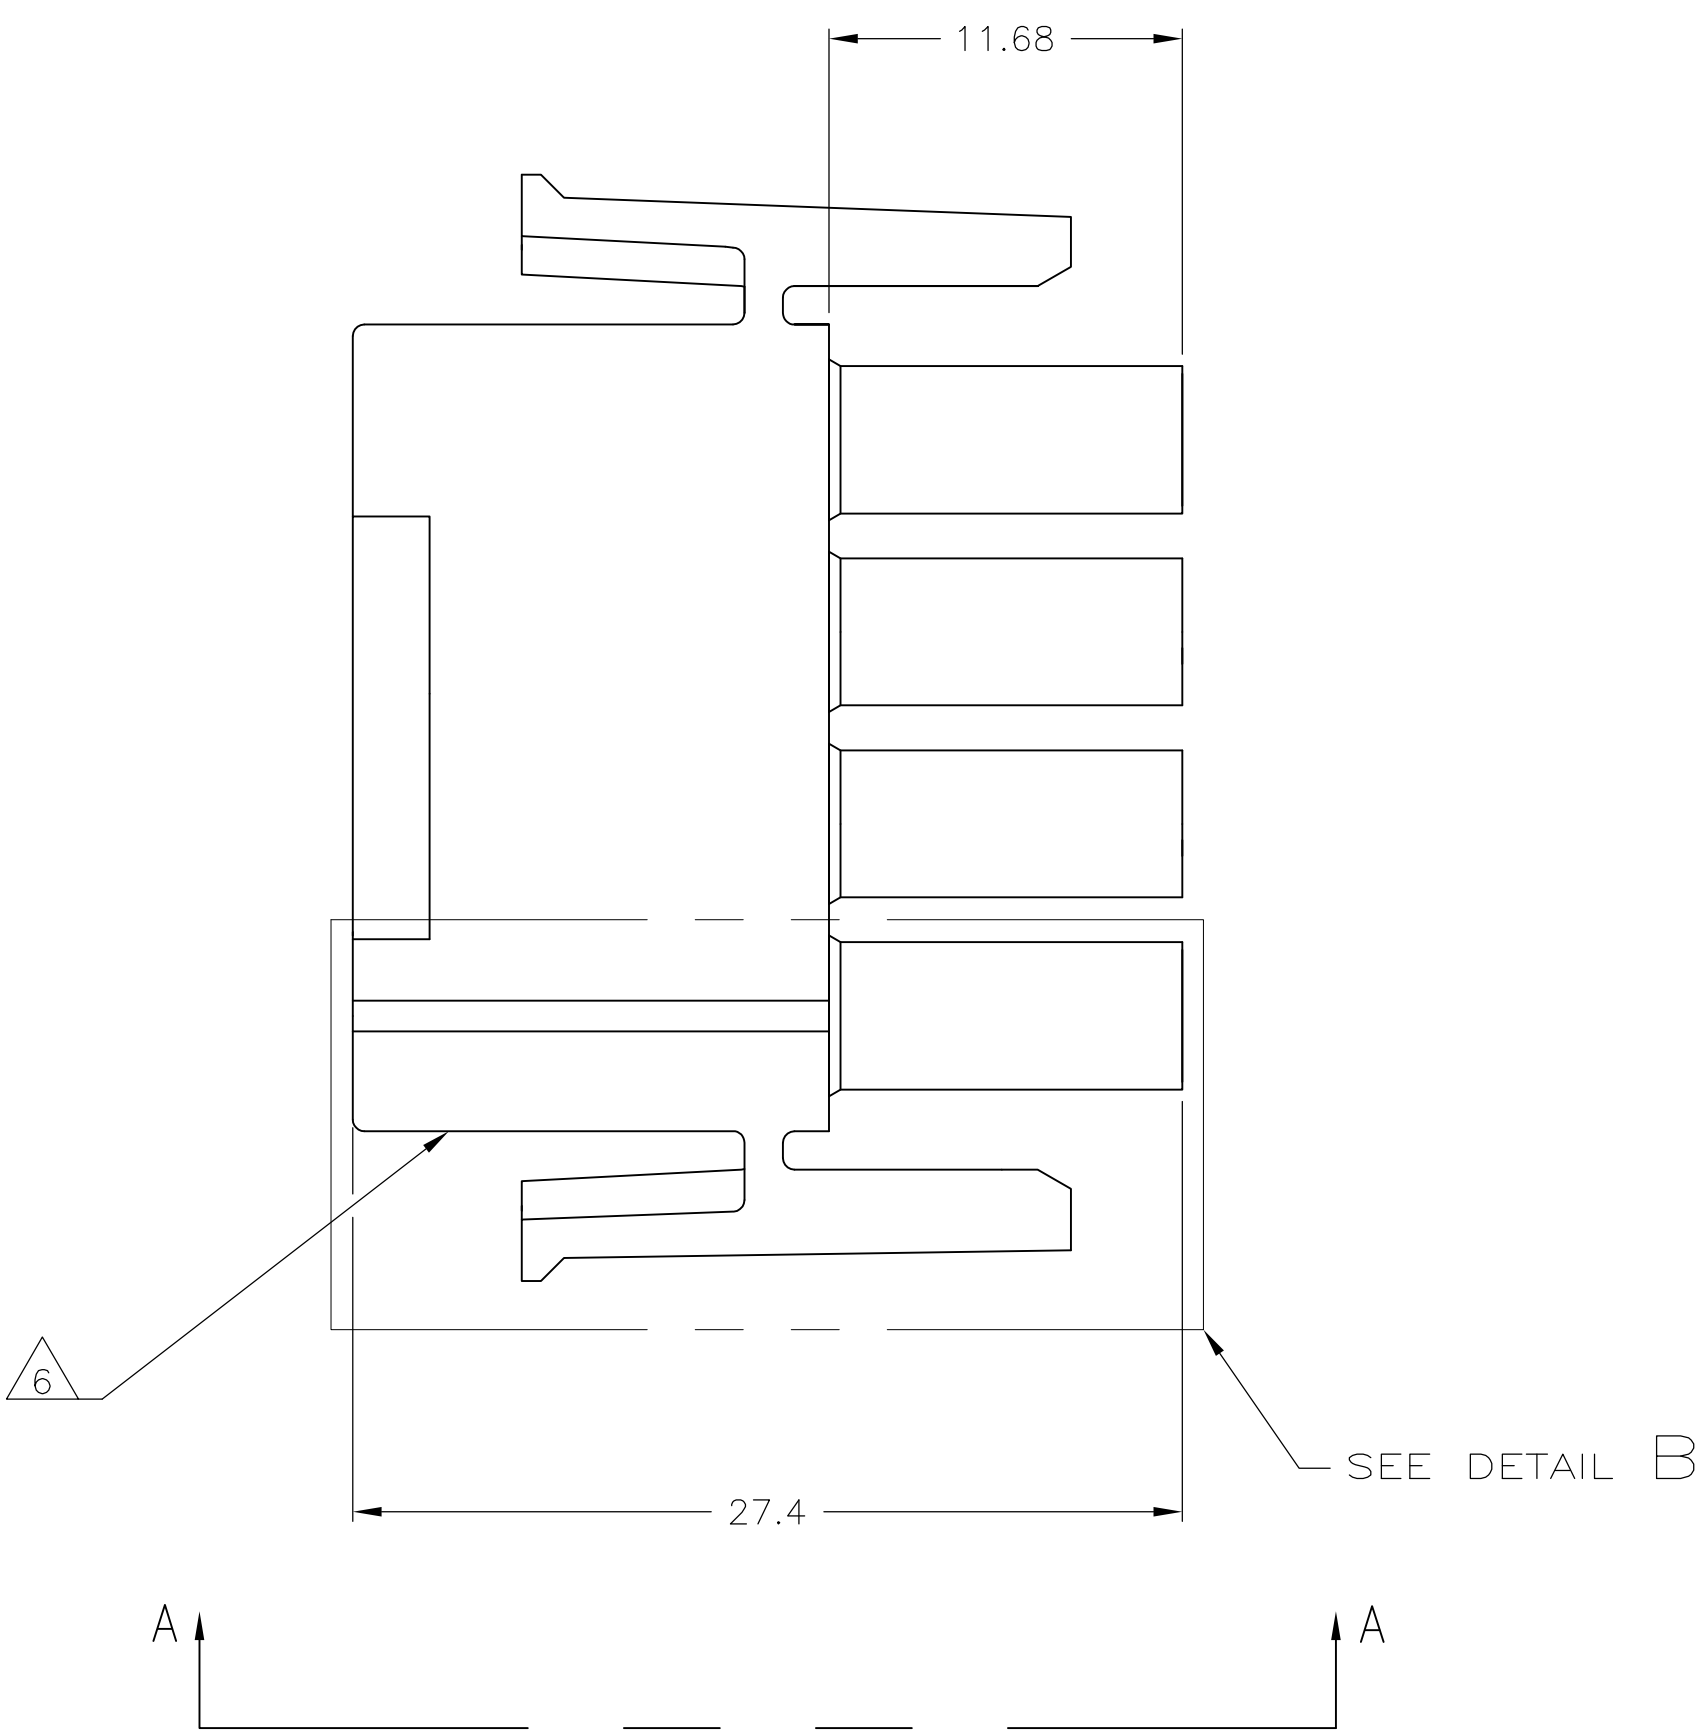




LOC	DIST	REVISIONS					
CM	53	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AB5	REVISED PER ECR-15-015914	03NOV2015	NK	DC

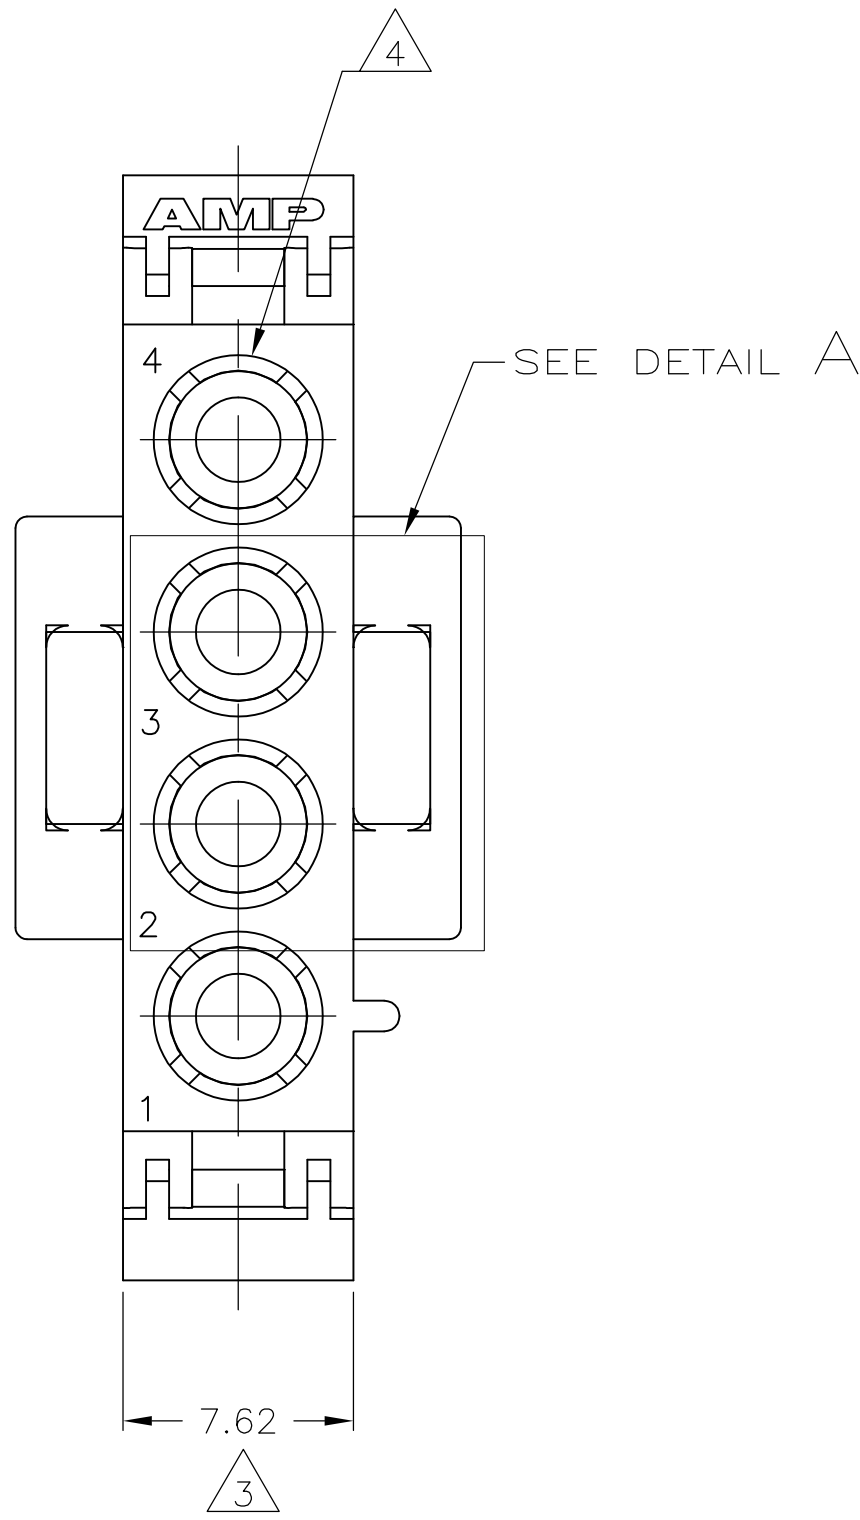


- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
- △3 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- △4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION,OPTIONAL.
- △5 NOT MANUFACTURED IN U.S.
- △6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- △ MATERIAL CORRESPONDING TO THE REQUIREMENT OF IEC60335-1 (INCL. GWT 750°C WITHOUT FLAME)

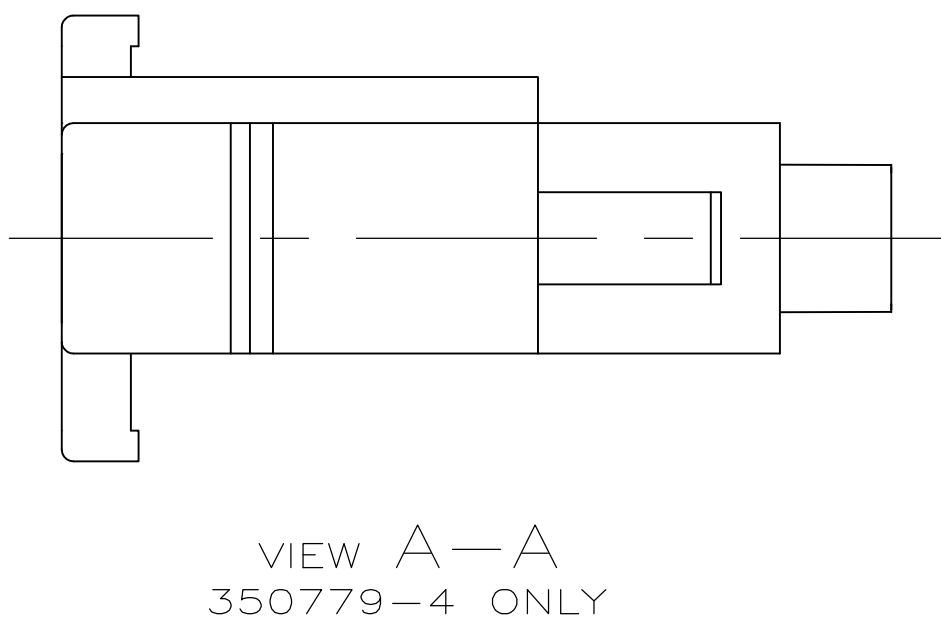


VIEW A—A
350779-4 ONLY

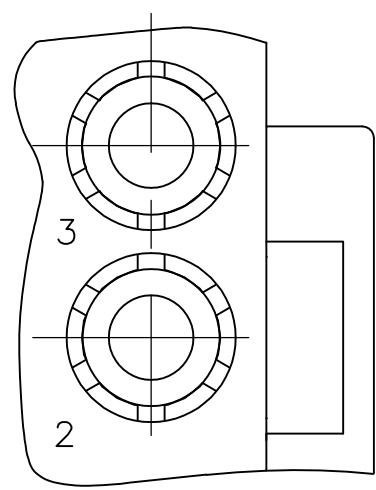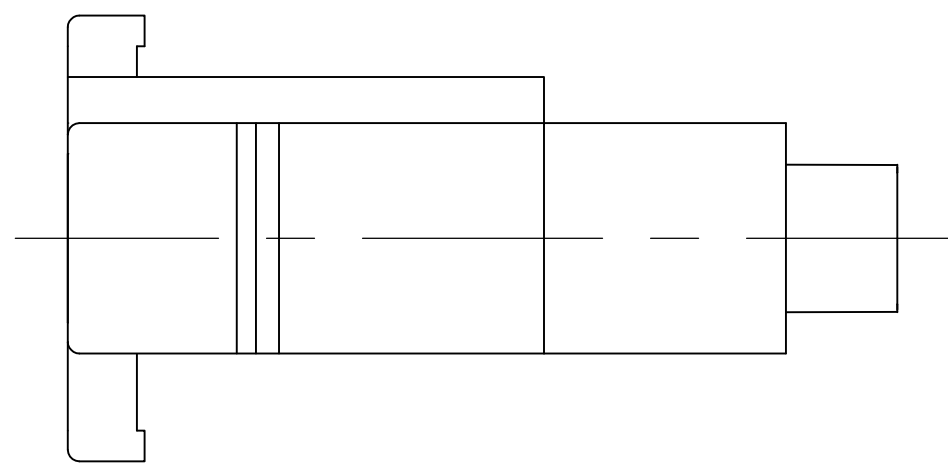


DETAIL A
OPTIONAL CONSTRUCTION

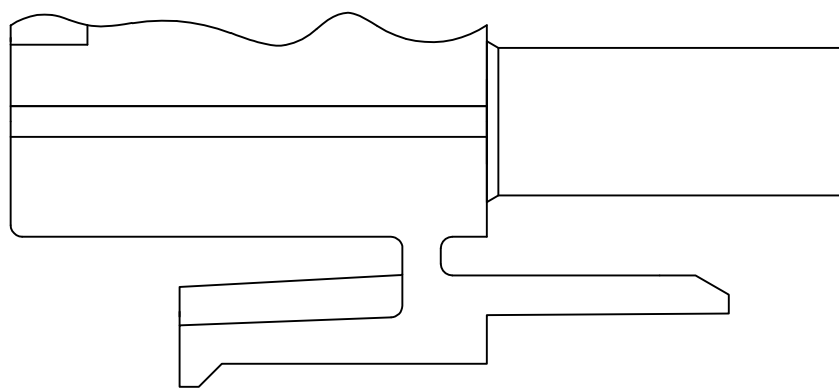

DETAIL B
350779-4 ONLY

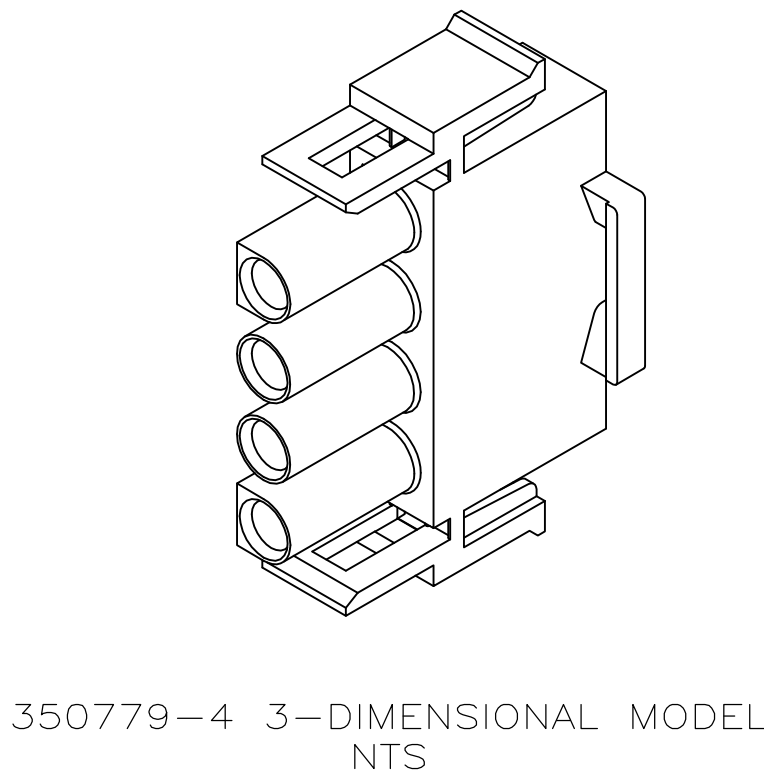

350779-4 3-DIMENSIONAL MODEL
NTS

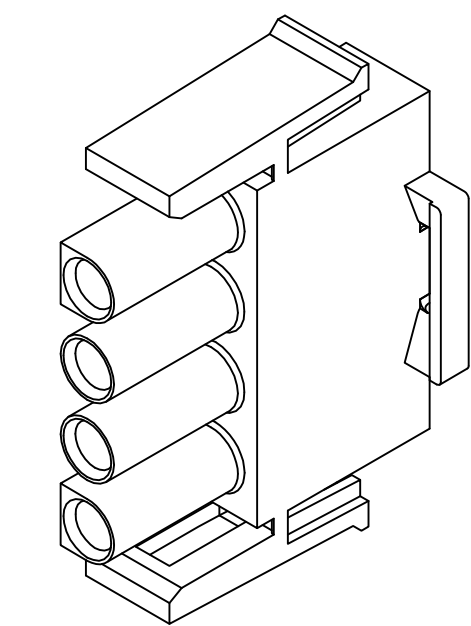

3-DIMENSIONAL MODEL
NTS

△ NATURAL	350779-5
BLACK	1-350779-9
GRAY	1-350779-8
BLUE	1-350779-6
GREEN	1-350779-5
YELLOW	1-350779-4
ORANGE	1-350779-3
RED	1-350779-2
BROWN	1-350779-1
△	350779-4
NATURAL	350779-1
COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL	03FEB95	TE Connectivity	
		CHK R. SWING	03FEB95		
DIMENSIONS: mm		APVD D. SELF	03FEB95	NAME PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK™	
		PRODUCT SPEC		SIZE A1	
		APPLICATION SPEC		CAGE CODE 00779	
MATERIAL NYLON,UL 94V-0		WEIGHT —		DRAWING NO 350779	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .— 1 PLC ± 0.4 2 PLC ± 0.20 3 PLC ± .— 4 PLC ± .— ANGLES ± .— FINISH —		CUSTOMER DRAWING		RESTRICTED TO —	
		SCALE 4:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350779-4](#)