


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		C	REV; ECO-14-011315	25JUL2014	GG	LS

- 1
- DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2
- MATERIAL: HOUSING- POLYCARBONATE, CLEAR
TERMINAL- .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178 μ m [.000007] THICK GOLD IN LOCALIZED PLATE AREA OVER .762 μ m [.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54 μ m [.000100] THICK NICKEL ON ENTIRE CONTACT.
3.
- PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.99[.039] WITH AN OVAL CABLE JACKET OF 2.29 X 6.61 [.090 X .260] MAXIMUM.
- 4
- TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 5
- PACKAGED 1000 LOOSE PIECES PER CARTON.

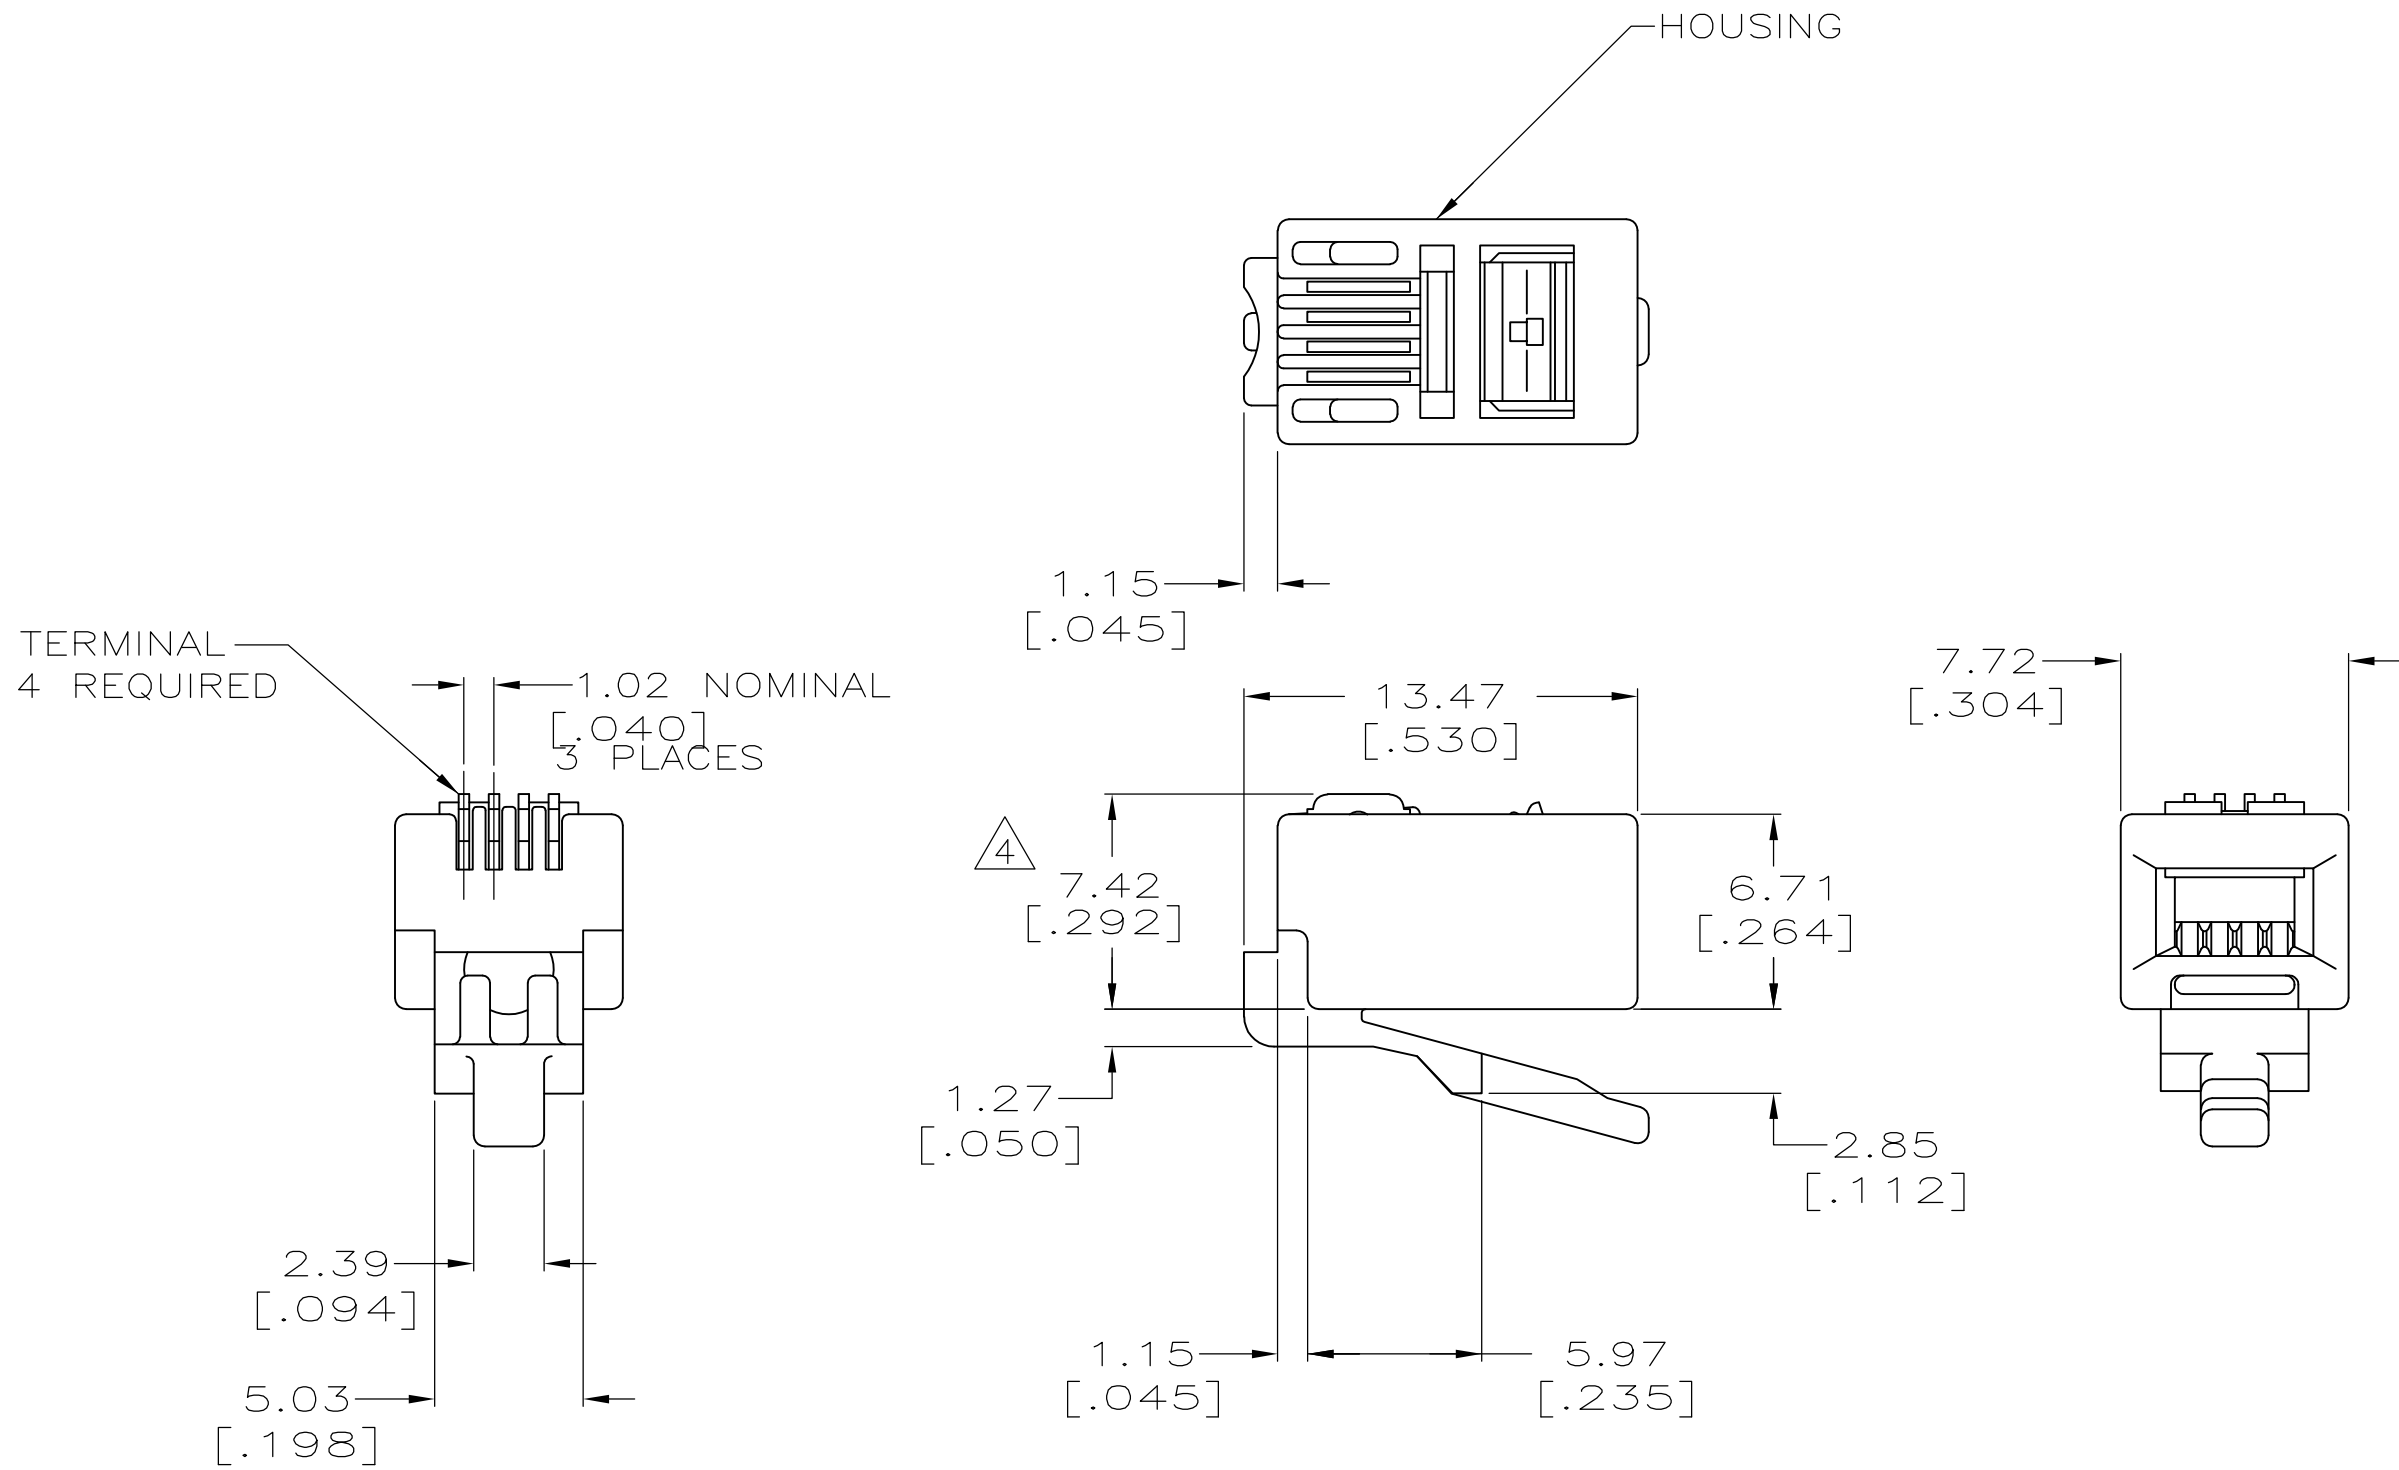

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. GALLUCCI/UTA	4-4-94	<div>5</div> 5-556200-2		
		CHK	N. JONES	4-9-94			
DIMENSIONS: INCHES		APVD	-	-	PACKAGED		
		PRODUCT SPEC	108-1163	-	TE Connectivity		
		APPLICATION SPEC	114-6016	-			
		WEIGHT	-	-	MODULAR PLUG ASSEMBLY, 4 POSITION, SOLID WIRE, HANDSET		
MATERIAL		SIZE	A2	00779	CAGE CODE	C=556200	RESTRICTED TO
FINISH		DRAWING NO	114-6016	-	SCALE	4:1	SHEET
TOLERANCES UNLESS OTHERWISE SPECIFIED:		1	± -	2	1 of 1	REV	C
0 PLC		2	± -	3	CUSTOMER DRAWING		
1 PLC		3	± -	4	SCALE		
2 PLC		4	± -	5	SHEET		
3 PLC		5	± -	6	REV		
4 PLC		6	± -	7	C		
ANGLES		7	± -	8			
FINISH		8	± -	9			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-556200-2](#)