


# K

Index	Änderung	Tag	Name
L2	REVISED PER ECO-11-005150	25-Mar-11	RK / HMR
L3	REVISED PER ECR-20-005051	22OCT2020	SS / VS

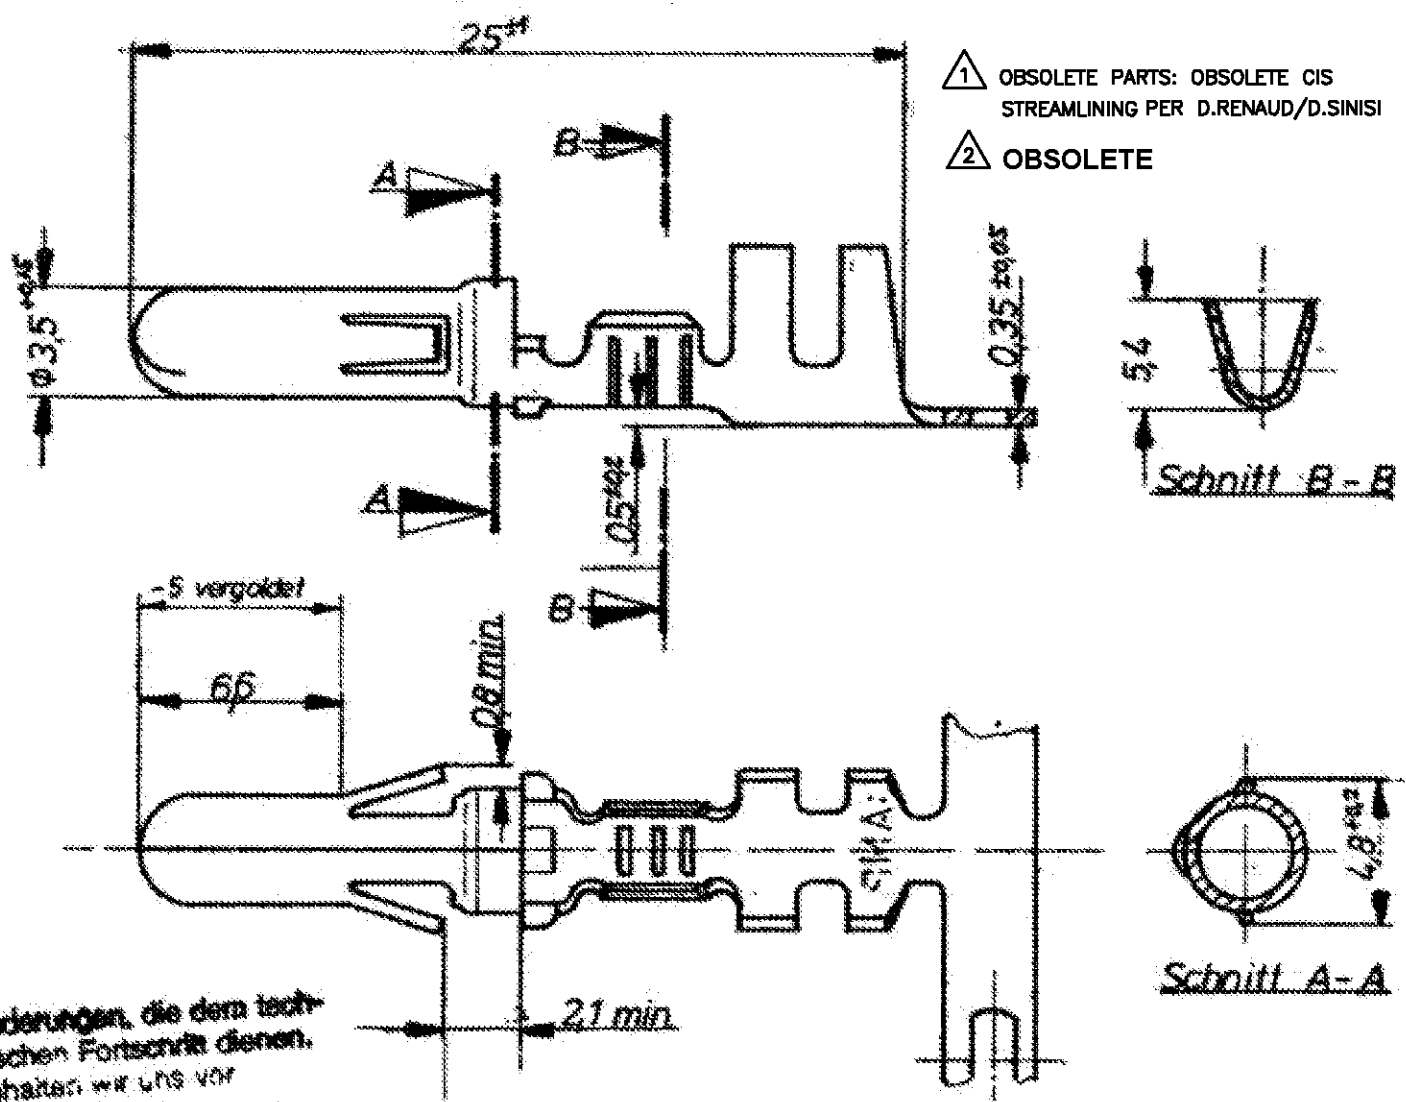

⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI  
 ⚠ OBSOLETE

: 925 713-5	21-4 mm <sup>2</sup>	max 4,5 mm	Bronze	vergoldet	925 662-5
⚠ 925 713-4	21-4 mm <sup>2</sup>	max. 4,5mm	Bronze		
⚠ 925 713-3	21-4 mm <sup>2</sup>	max. 4,5mm	Bronze	versilbert	<del>925 662-3</del> ⚠
925 713-2	21-4 mm <sup>2</sup>	max 4,5mm	Bronze	vorverzinkt	925 662 -2
925 713-1	21-4 mm <sup>2</sup>	max 4,5mm	Messing	vorverzinkt	925 662-1
Best Nr.	DGB	Isolations Ø	Werkstoff	Oberfläche	Einzelaufl

**TE** TE Connectivity

Genzeichnung

**Ø 3,5 Stift**

**K**

Bestell-Nr.	Werkstoff	Oberfläche Farbe	Nicht tolerierte Maße ± 0,4 mm ± 1°30'	Format <b>A</b>	Zuschlags-Nr. <b>925713</b>
12.75 John	16-3/2/76		Maßstab 4:1		REV L3