

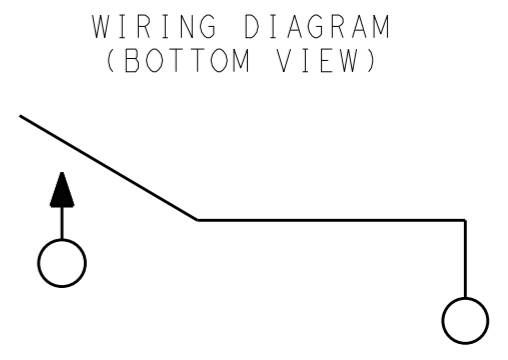
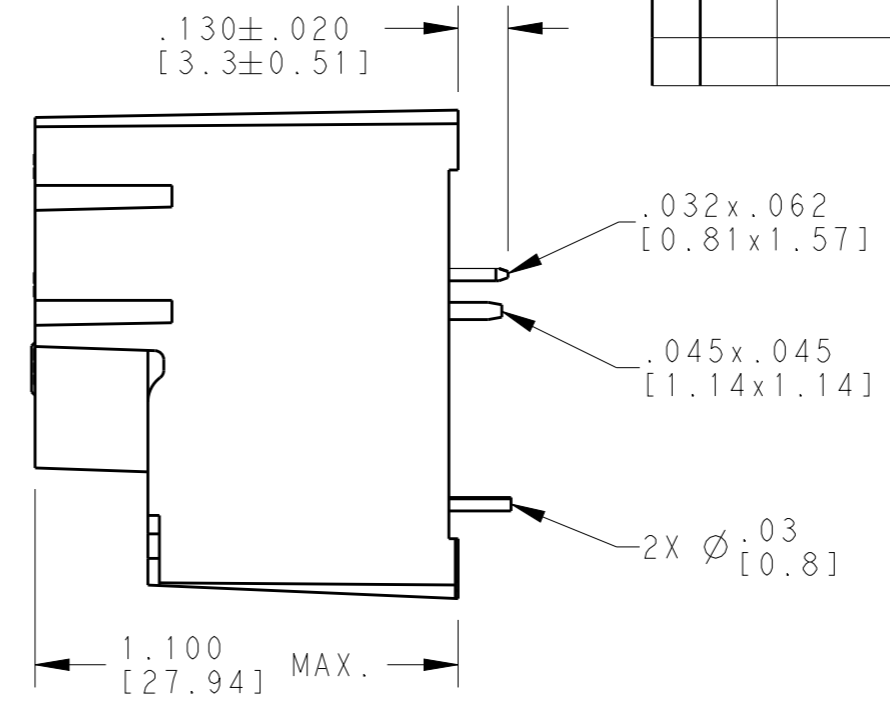


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	00	F	ECR-10-018145	03NOV2010	SPN GK
		G	CHANGE TE LOGO, ECO-12-005755	24AUG2012	HL.C BH.Y

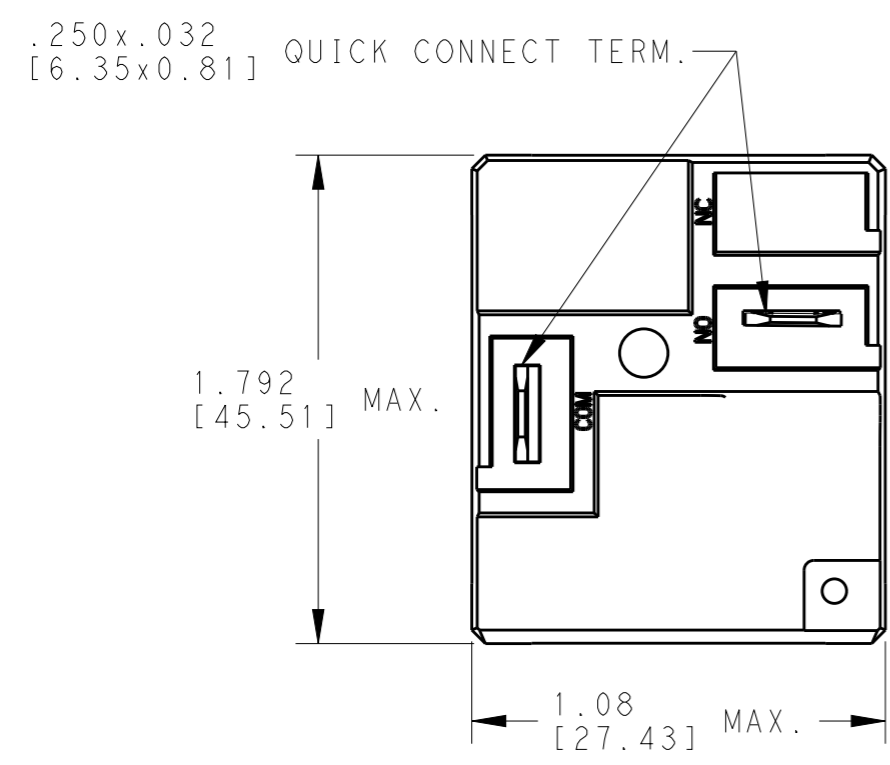

HOLE CHART
 A- Ø .043±.003 [1.09±0.08]
 B- Ø .081 [2.06]

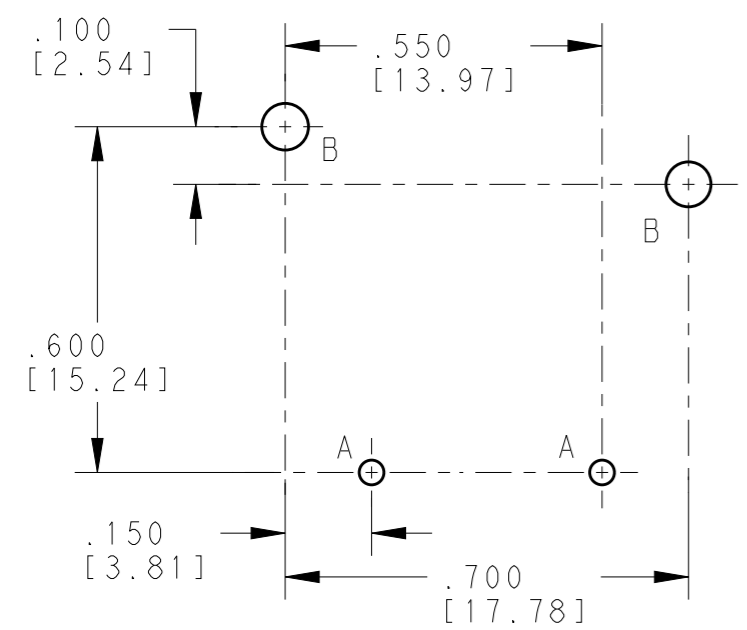


ELECTRICAL CHARACTERISTICS


NOMINAL VOLTAGE: 12VDC
 OPERATE VOLTAGE: 9VDC
 DROPOUT VOLTAGE: 1.2VDC MIN.
 COIL RESISTANCE: 144 OHMS ±10%
 CONTACT ARRANGEMENT: 1 FORM A (SPST)
 CONTACT MATERIAL: SILVER CADMIUM OXIDE
 CONTACT RATING: 30A @ 240 VAC, NO CONTACT

BREAKDOWN: 1554V RMS 60Hz ACROSS OPEN CONTACTS
 2500V RMS 60Hz BETWEEN CONTACTS AND COIL
 6KV SURGE USING 1.2 MICROSEC. / 50 MICROSEC. IMPULSE WAVE OR
 .5 MICROSEC. -100KHz RING WAVE BETWEEN CONTACTS AND COIL.

STORAGE TEMPERATURE RANGE: -55°C TO +130°C
 OPERATE TEMPERATURE RANGE: -55°C TO +105°C**



TE PART NO.
 1-1419104-7

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SLIKE 09FEB2010	 TE Connectivity	
DIMENSIONS: INCH [mm]		CHK G. KOPPENHEFFER 09FEB2010		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. KOPPENHEFFER 09FEB2010	NAME RELAY, PC, SEALED	
0 PLC ±-		PRODUCT SPEC -	SIZE A3	
1 PLC ±-		APPLICATION SPEC -	CAGE CODE 00779	
2 PLC ±.01[0.25]		WEIGHT -	DRAWING NO. T9AS1D22-12	
3 PLC ±.005[0.13]		RESTRICTED TO -	SCALE 2:1	
4 PLC ±-		Customer Drawing	SHEET 1 OF 1	
ANGLES ±-			REV G	
MATERIAL -				
FINISH -				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T9AS1D22-12](#)