




## WH2402A Character 24x2

### Dimension drawing

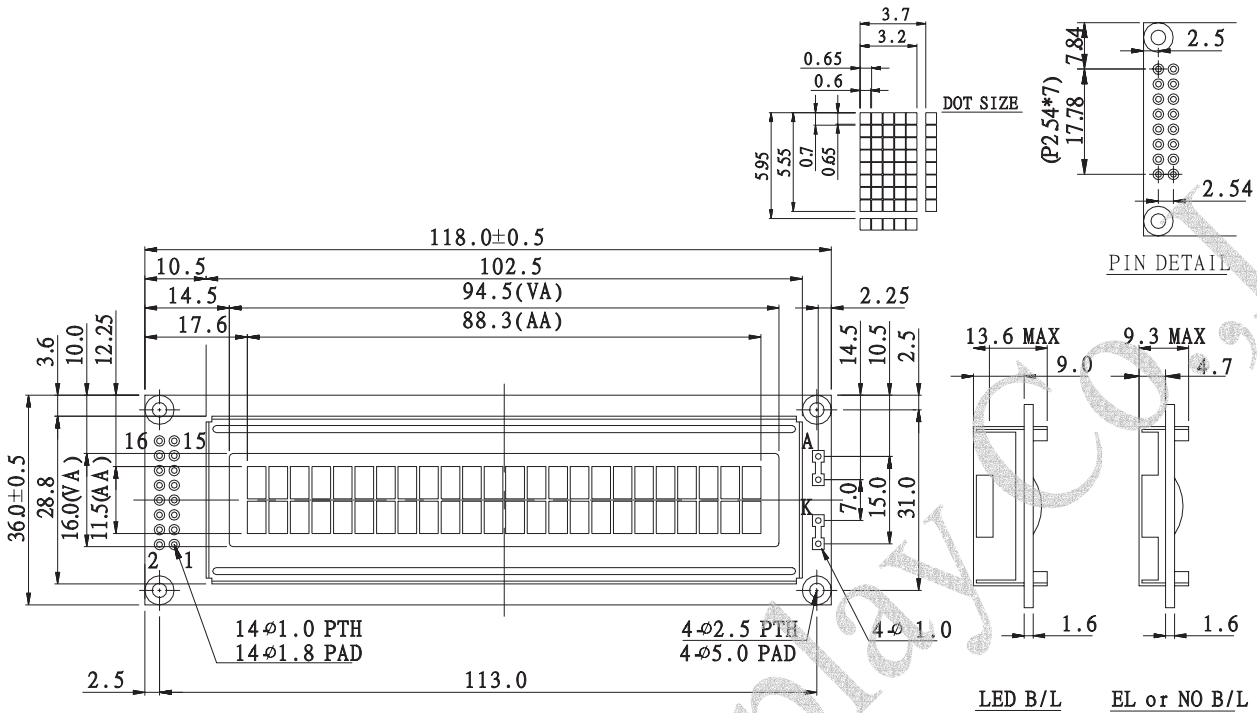

### Feature

1. 5x8 dots includes cursor
2. Built-in controller (KS 0066 or Equivalent)
3. +5V power supply (Also available for +3V)
4. 1/16 duty cycle
5. LED can be driven by pin1, pin2, pin15, pin16 or A and K
6. N.V. optional for +3V power supply

### Mechanical Data

| Item             | Standard Value | Unit |
|------------------|----------------|------|
| Module Dimension | 118.0x36.0     | mm   |
| Viewing Area     | 94.5x16.0      | mm   |
| Mounting hole    | 113.0x 31.0    | mm   |
| Character Size   | 3.2x5.55       | mm   |

### Absolute Maximum Rating

| Item          | Symbol  | Standard Value |      |      | Unit |
|---------------|---------|----------------|------|------|------|
|               |         | min.           | typ. | max. |      |
| Power Supply  | VDD-VSS | -0.3           | ---  | 7.0  | V    |
| Input Voltage | VI      | -0.3           | ---  | VDD  | V    |

Note : VSS=0 Volt, VDD=5.0 Volt.

### Electrical Characteristics

| Item   | Symbol | Condition        | Standard Value |      |      | Unit |
|--|--------|------------------|----------------|------|------|------|
|  |        |                  | min.           | typ. | max. |      |
| Input Voltage  | VDD    | VDD=+5V          | 4.7            | 5.0  | 5.3  | V    |
|  |        | VDD=+3V          | 2.7            | 3.0  | 5.3  | V    |
| Supply Current   | IDD    | VDD=5V           | ---            | 0.8  | 1.1  | mA   |
| Recommended LC Driving Voltage for Normal Temp. Version module | VDD-V0 | -20°C            | 5.1            | 5.3  | 5.7  | V    |
|  |        | 0°C              | 4.6            | 4.9  | 5.2  |      |
|  |        | 25°C             | 4.1            | 4.5  | 4.7  |      |
|  |        | 50°C             | 3.9            | 4.2  | 4.5  |      |
|  |        | 70°C             | 3.7            | 3.9  | 4.3  |      |
| LED Forward Voltage  | VF     | 25°C             | ---            | 4.2  | 4.6  | V    |
| LED Forward Current  | IF     | 25°C             | ---            | 190  | 380  | mA   |
| EL Power Supply Current  | IEL    | Vel=110VAC;400Hz | ---            | ---  | 5.0  | mA   |

### Display Character Address Code :

Display position

|                |    |    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |    |
|----------------|----|----|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|----|
| DD RAM Address | 00 | 01 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | 17 |
| DD RAM Address | 40 | 41 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | 57 |

| Pin NO. | Symbol | Function                                     |
|---------|--------|--|
| 1       | Vss    | GND  |
| 2       | Vdd    | +3V or +5V                                   |
| 3       | Vo     | Contrast Adjustment                          |
| 4       | RS     | H/L Register select signal                   |
| 5       | R/W    | H/L Read / write signal                      |
| 6       | E      | H→L Enable signal                            |
| 7       | DB0    | H/L Data bus line                            |
| 8       | DB1    | H/L Data bus line                            |
| 9       | DB2    | H/L Data bus line                            |
| 10      | DB3    | H/L Data bus line                            |
| 11      | DB4    | H/L Data bus line                            |
| 12      | DB5    | H/L Data bus line                            |
| 13      | DB6    | H/L Data bus line                            |
| 14      | DB7    | H/L Data bus line                            |
| 15      | A/Vee  | +4.2V for LED(RA=0Ω)/Negative Voltage output |
| 16      | K      | Power supply for B/L (0V)                    |

Character type