

## Glass Passivated Rectifier Diode Modules




**VRRM** 800 to 1800V  
**IFAV** 100 A

### Applications

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

### Features

- Blocking voltage: 800 to 1800V
- Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- Glass passivated chip

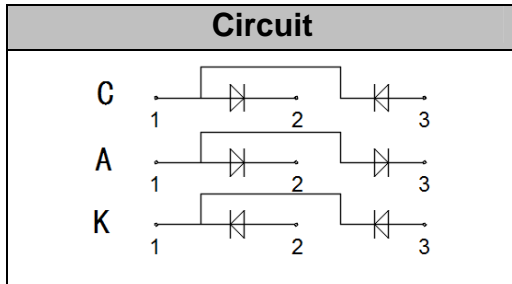

### Module Type

TYPE			VRRM	VRSM
MD100C08D1N	MD100A08D1N	MD100K08D1N	800V	900V
MD100C12D1N	MD100A12D1N	MD100K12D1N	1200V	1300V
MD100C16D1N	MD100A16D1N	MD100K16D1N	1600V	1700V
MD100C18D1N	MD100A18D1N	MD100K18D1N	1800V	1900V

### Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=106°C	100	A
IFSM	t=10mS Tvj =45°C	4000	A
i <sup>2</sup> t	t=10mS Tvj =45°C	80000	A <sup>2</sup> s
Visol	a.c.50HZ;r.m.s.;1min	3000	V
Tvj		-40 to +150	°C
Tstg		-40 to +125	°C
Mt	To terminals(M5)	3±15%	Nm
Ms	To heatsink(M6)	5±15%	Nm
Weight	Module (Approximately)	100	g

### Thermal Characteristics

Symbol	Conditions	Values	Units
Rth(j-c)	Per diode	0.26	°C/W
	Per Module	0.13	°C/W
Rth(c-s)	Per Module	0.1	°C/W

### Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
VFM	T=25°C IF =300A	—	1.20	1.35	V
IRD	Tvj=150°C VRD=VRRM	—	—	6	mA



## Performance Curves

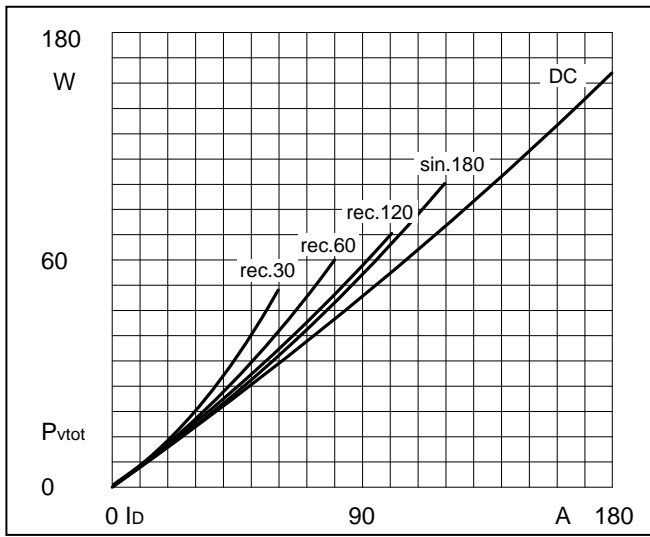


Fig1. Power dissipation

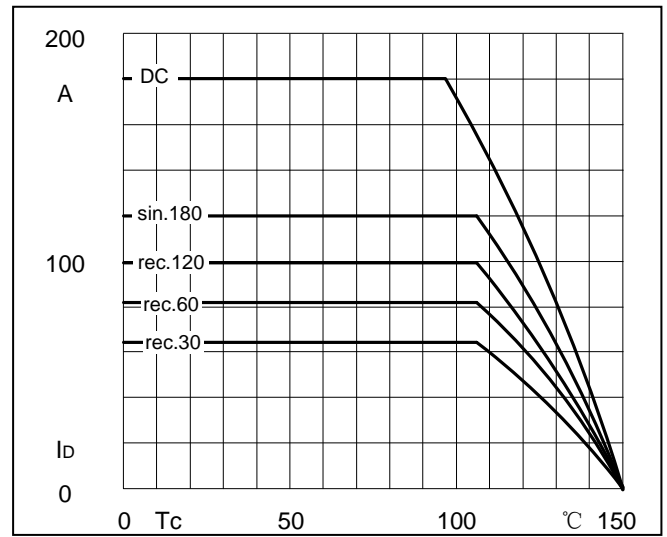


Fig2. Forward Current Derating Curve

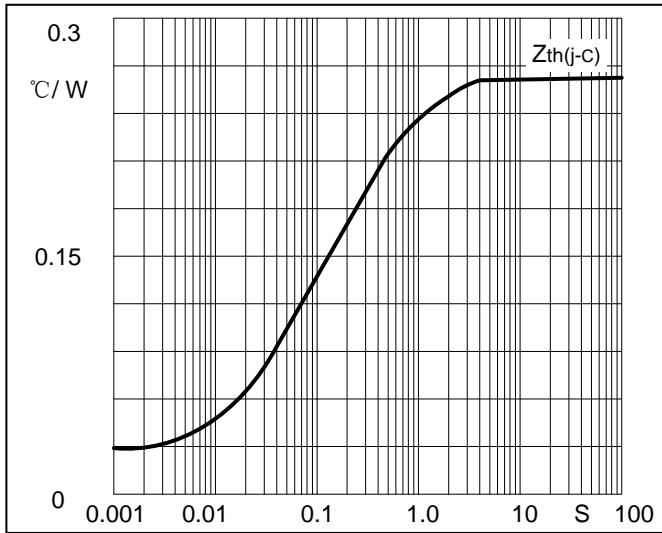


Fig3. Transient thermal impedance

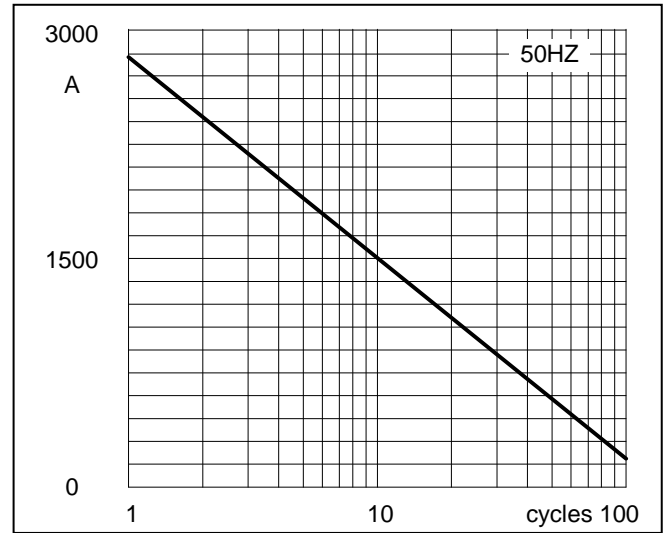


Fig4. Max Non-Repetitive Forward Surge Current


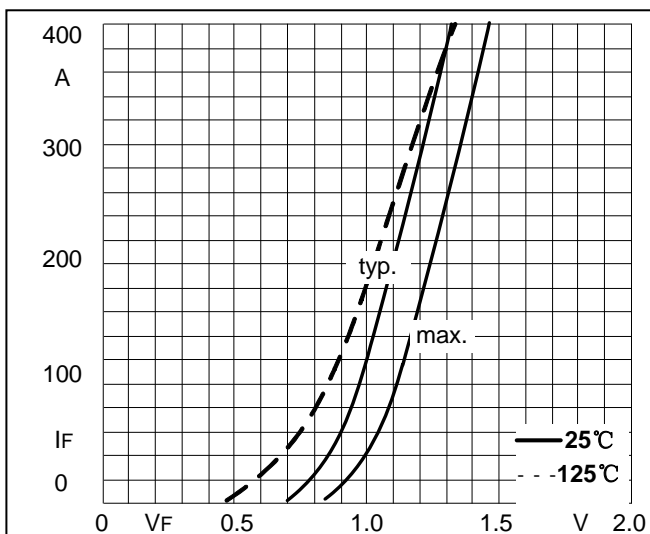


Fig5. Forward Characteristics

## Package Outline Information

CASE: D1N

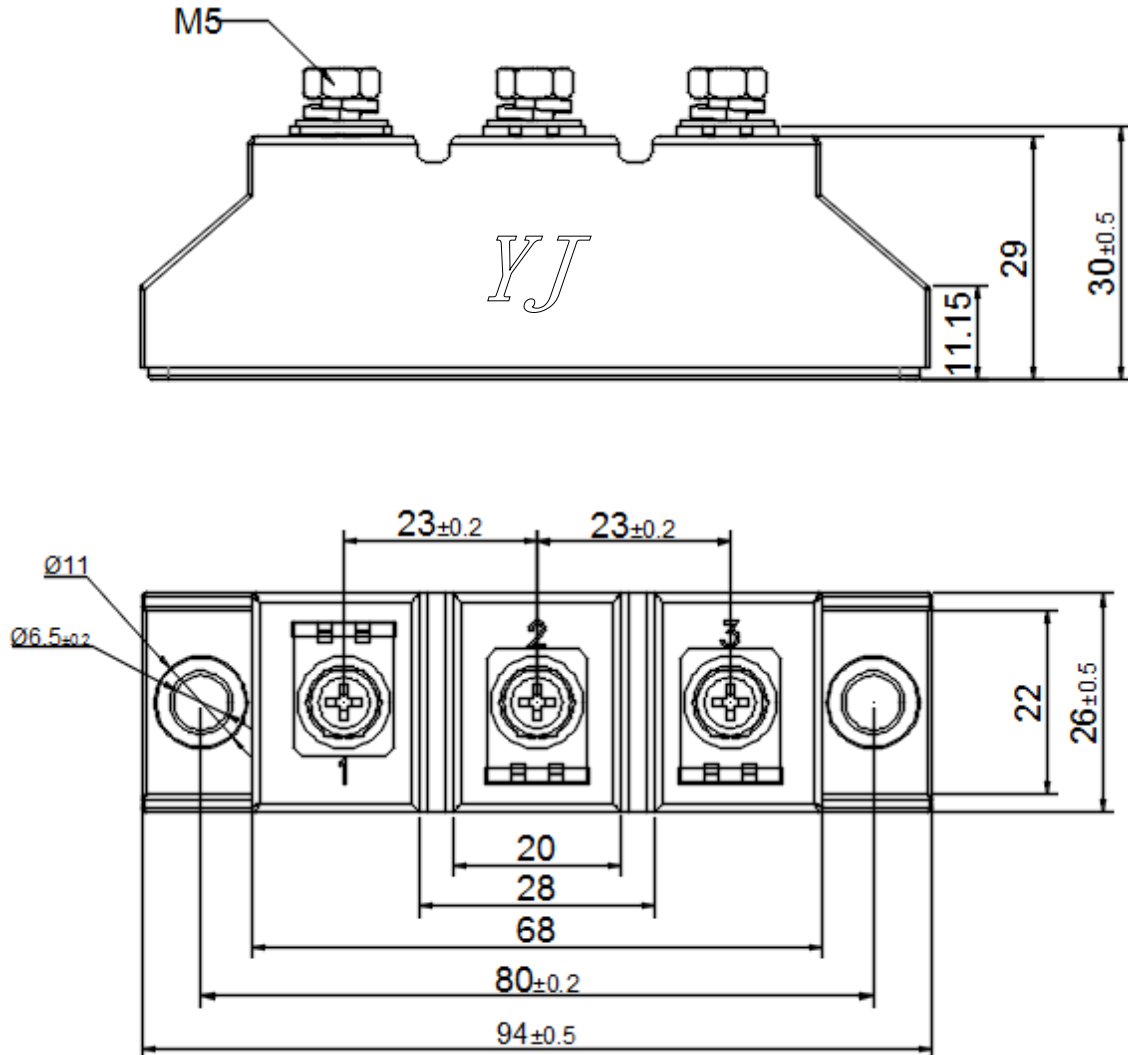

Dimensions in mm