




IGBT Modules

V _{CES}	1200V
I _C	100A

Applications

- Motor drive
- UPS (Uninterruptible Power Supplies)
- Soft switching welding machine

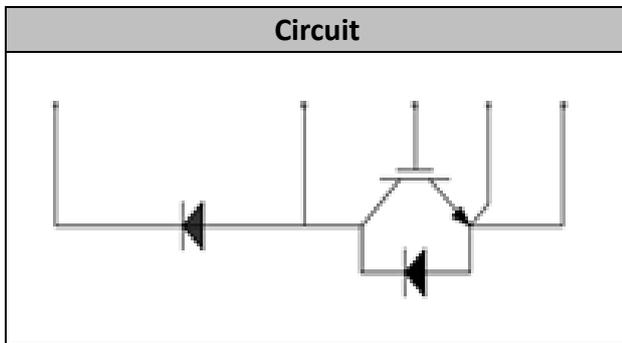

Features

- Low V_{ce(sat)} with Trench technology
- V_{ce(sat)} with positive temperature coefficient
- High short circuit capability(10us)
- Including ultra fast & soft recovery anti-parallel FWD
- Low inductance
- Maximum junction temperature 175°C

● IGBT

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Collector-Emitter Voltage	V _{CES}	V _{GE} =0V, I _C =1mA, T _{vj} =25°C	1200	V
Continuous Collector Current	I _C	T _c =100°C	100	A
Repetitive Peak Collector Current	I _{CRM}	t _p =1ms	200	A
Gate-Emitter Voltage	V _{GES}	T _{vj} =25°C	±20	V
Total Power Dissipation	P _{tot}	T _c =25°C T _{vjmax} =175°C	785	W



Characteristic values

Parameter	Symbol	Conditions	Value			Unit	
			Min.	Typ.	Max.		
Gate-emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=5mA, T_{vj}=25^{\circ}C$	5.0	5.7	6.5	V	
Collector-Emitter Cut-off Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V, T_{vj}=25^{\circ}C$			1.0	mA	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100A, V_{GE}=15V, T_{vj}=25^{\circ}C$		1.85	2.20	V	
		$I_C=100A, V_{GE}=15V, T_{vj}=125^{\circ}C$		2.15			
		$I_C=100A, V_{GE}=15V, T_{vj}=150^{\circ}C$		2.25			
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$		7.43		nF	
Reverse Transfer Capacitance	C_{res}	$f=1MHz, T_{vj}=25^{\circ}C$		0.34		nF	
Internal Gate Resistance	R_{gint}			7.5		Ω	
Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=20V, T_{vj}=25^{\circ}C$			400	nA	
Turn-on Delay Time	$t_{d(on)}$	$I_C=100A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=5.1\Omega$ $T_{vj}=25^{\circ}C$		265		ns	
Rise Time	t_r			56		ns	
Turn-off Delay Time	$t_{d(off)}$			295		ns	
Fall Time	t_f			183		ns	
Energy Dissipation During Turn-on Time	E_{on}			8.15		mJ	
Energy Dissipation During Turn-off Time	E_{off}			7.98		mJ	
Turn-on Delay Time	$t_{d(on)}$		$I_C=100A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=5.1\Omega$ $T_{vj}=125^{\circ}C$		278		ns
Rise Time	t_r				62		ns
Turn-off Delay Time	$t_{d(off)}$				317		ns
Fall Time	t_f				212		ns
Energy Dissipation During Turn-on Time	E_{on}			11.6		mJ	
Energy Dissipation During Turn-off Time	E_{off}			10.7		mJ	
Turn-on Delay Time	$t_{d(on)}$	$I_C=100A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=5.1\Omega$ $T_{vj}=150^{\circ}C$			286		ns
Rise Time	t_r				72		ns
Turn-off Delay Time	$t_{d(off)}$				431		ns
Fall Time	t_f				134		ns
Energy Dissipation During Turn-on Time	E_{on}			13.8		mJ	
Energy Dissipation During Turn-off Time	E_{off}			12.8		mJ	
SC Data	I_{sc}		$T_p \leq 10\mu s, V_{GE}=15V,$ $T_{vj}=150^{\circ}C, V_{cc}=600V,$ $V_{CEM} \leq 1200V$		500		A



● Diode-Chopper

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	$T_{vj}=25^{\circ}C$	1200	V
Continuous DC Forward Current	I_F		100	A
Repetitive Peak Forward Current	I_{FRM}	$t_p=1ms$	200	A
I^2t value	I^2t	$V_R=0V, t_p=10ms, T_{vj}=150^{\circ}C$	1250	A ² s

Characteristic values

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	$I_F=100A, T_{vj}=25^{\circ}C$		2.0		V
		$I_F=100A, T_{vj}=125^{\circ}C$		1.8		
		$I_F=100A, T_{vj}=150^{\circ}C$		1.75		
Recovered Charge	Q_{rr}	$I_F=100A$		14.6		μC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=2200A/\mu s$		103		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=25^{\circ}C$		5.8		mJ
Recovered Charge	Q_{rr}	$I_F=100A$		22.5		μC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=2200A/\mu s$		140		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=125^{\circ}C$		10.6		mJ
Recovered Charge	Q_{rr}	$I_F=100A$		28.3		μC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=2200A/\mu s$		165		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=150^{\circ}C$		14.8		mJ



● Diode, Reverse

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	$T_{vj}=25^{\circ}C$	1200	V
Continuous DC Forward Current	I_F		100	A
Repetitive Peak Forward Current	I_{FRM}	$t_p=1ms$	200	A
I^2t value	I^2t	$V_R=0V, t_p=10ms, T_{vj}=150^{\circ}C$	1250	A^2s

Characteristic values

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	$I_F=100A, T_{vj}=25^{\circ}C$		2.0		V
		$I_F=100A, T_{vj}=125^{\circ}C$		1.8		
		$I_F=100A, T_{vj}=150^{\circ}C$		1.75		
Recovered Charge	Q_{rr}	$I_F=100 A$		14.6		μC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=2200A/\mu s$		103		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=25^{\circ}C$		5.8		mJ
Recovered Charge	Q_{rr}	$I_F=100 A$		22.5		μC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=2200A/\mu s$		140		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=125^{\circ}C$		10.6		mJ
Recovered Charge	Q_{rr}	$I_F=100 A$		28.3		μC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=2200A/\mu s$		165		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=150^{\circ}C$		14.8		mJ



● Module Characteristics





T_c=25°C unless otherwise specified





Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Isolation voltage	V _{isol}	t=1min,f=50Hz	2500			V
Maximum Junction Temperature	T _{jmax}				175	°C
Operating Junction Temperature	T _{vj op}		-40		150	°C
Storage Temperature	T _{stg}		-40		125	°C
Comperative tracking index			CTI		>200	
Thermal Resistance Junction-to Case	R _{θJC}	per IGBT			0.19	K/W
		per Diode			0.29	
Thermal Resistance Case-to Sink	R _{θCS}	Conductive grease applied		0.05		K/W
Module Electrodes Torque	M _t	Recommended(M5)	2.5		5.0	N·m
Module-to-Sink Torque	M _s	Recommended(M6)	3.0		5.0	N·m
Weight of Module	G			150		g





MG100ZD12TLC1

RoHS
COMPLIANT

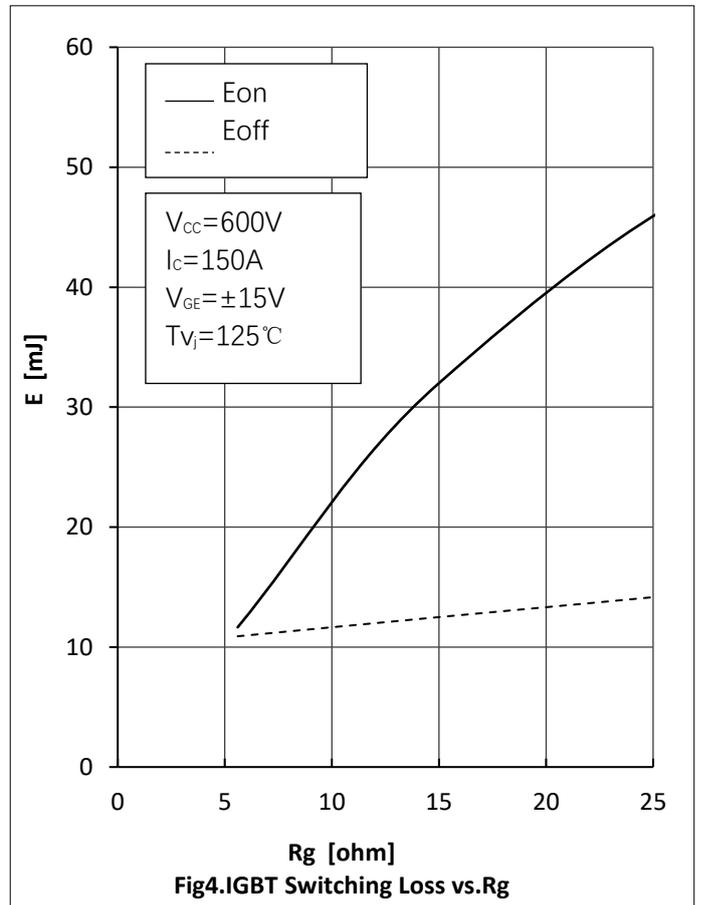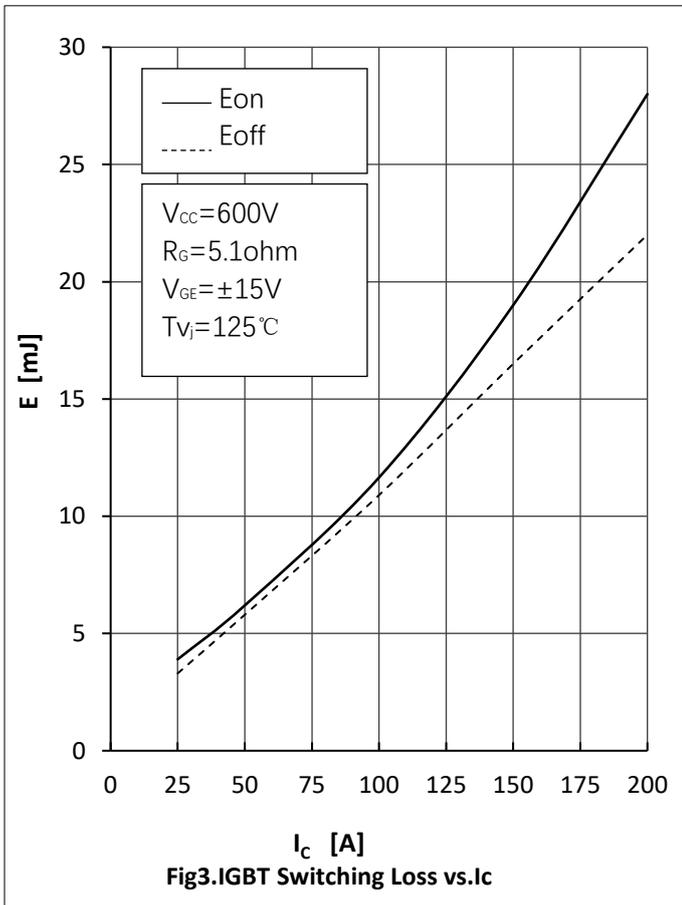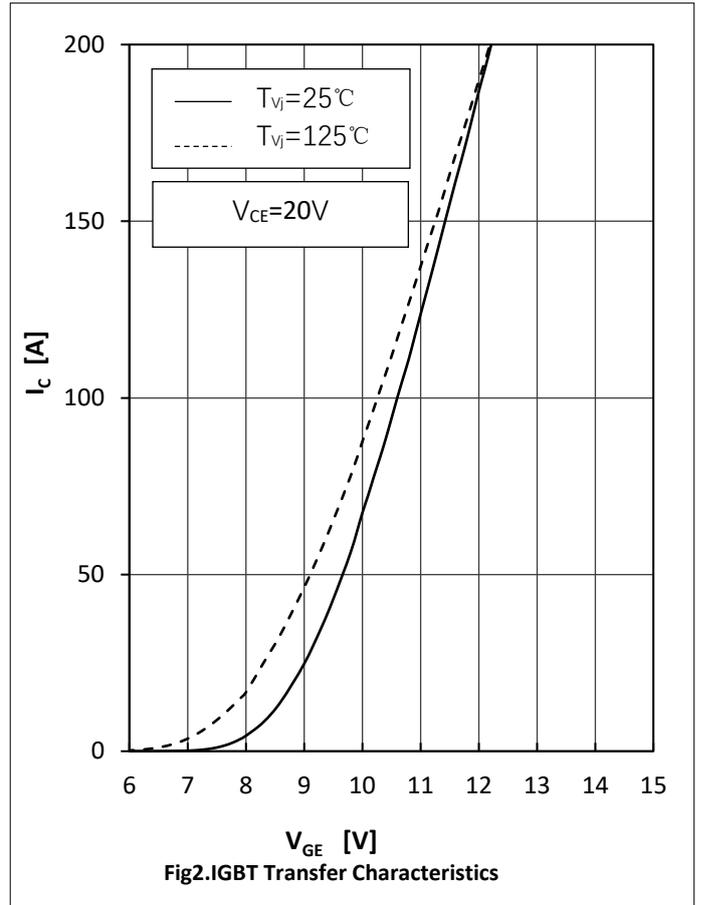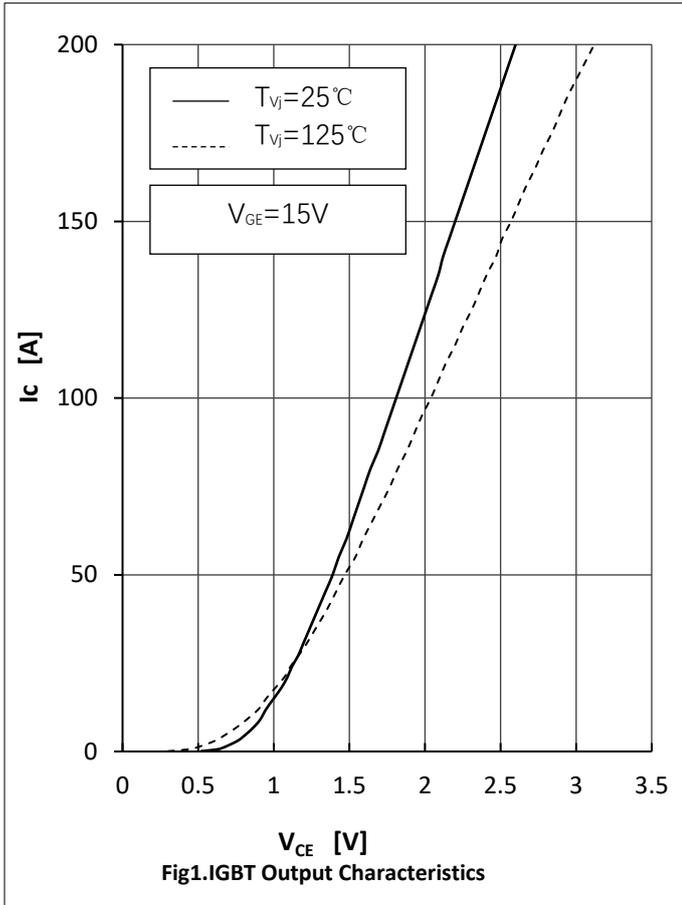


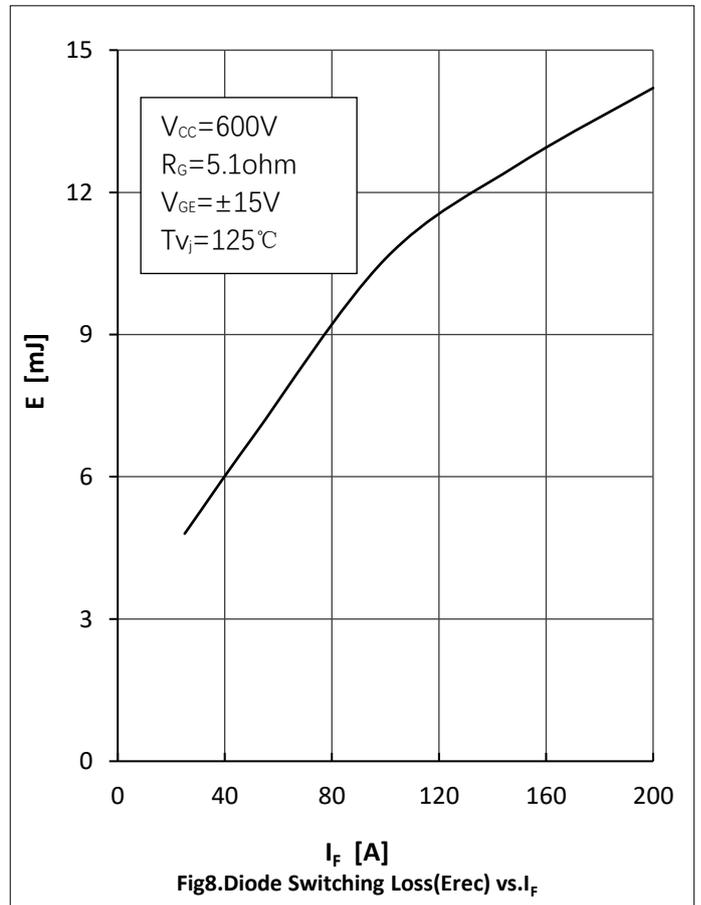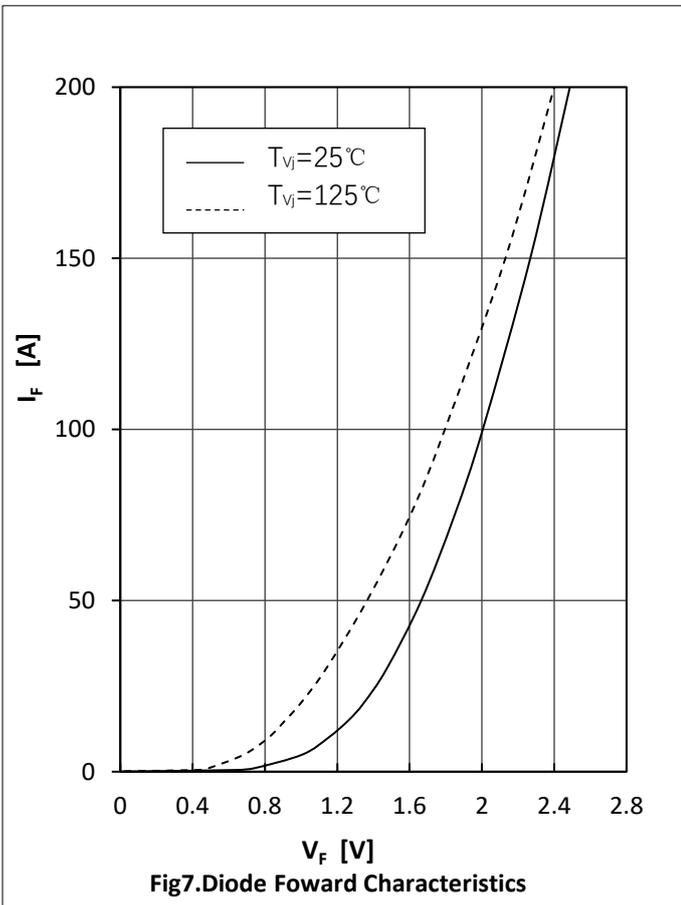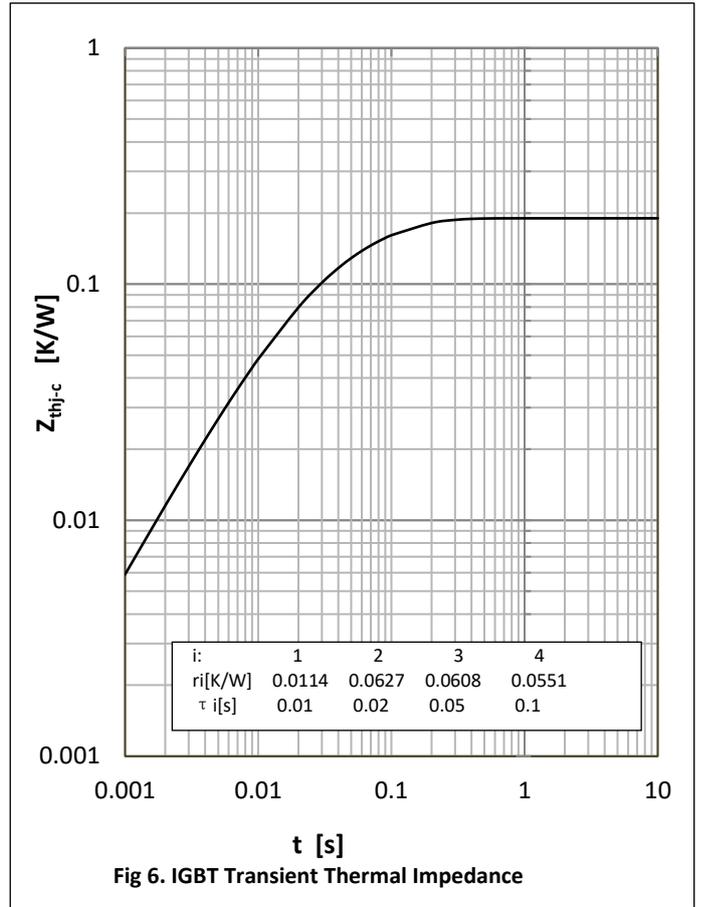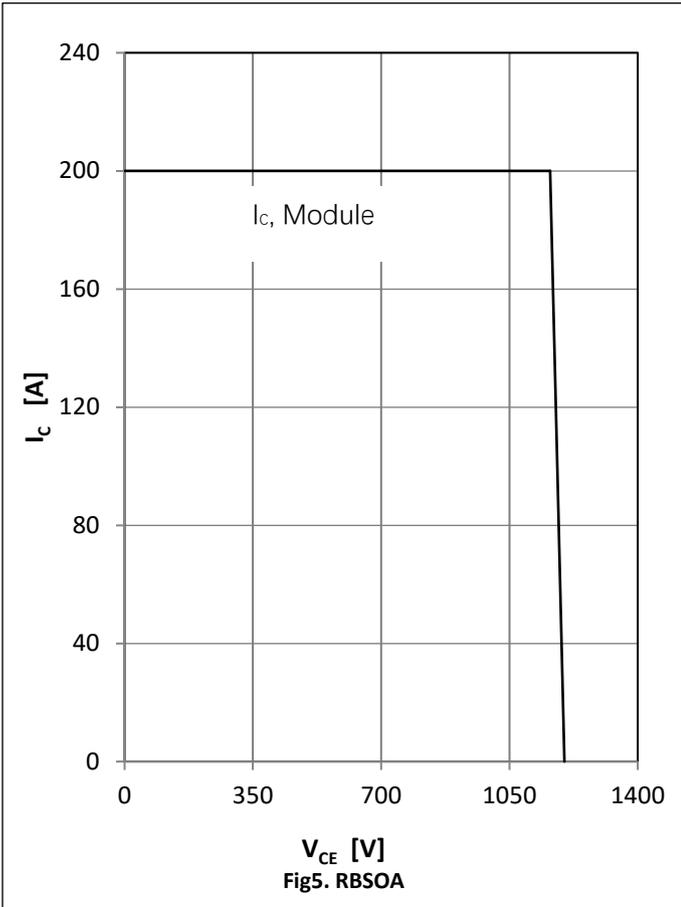

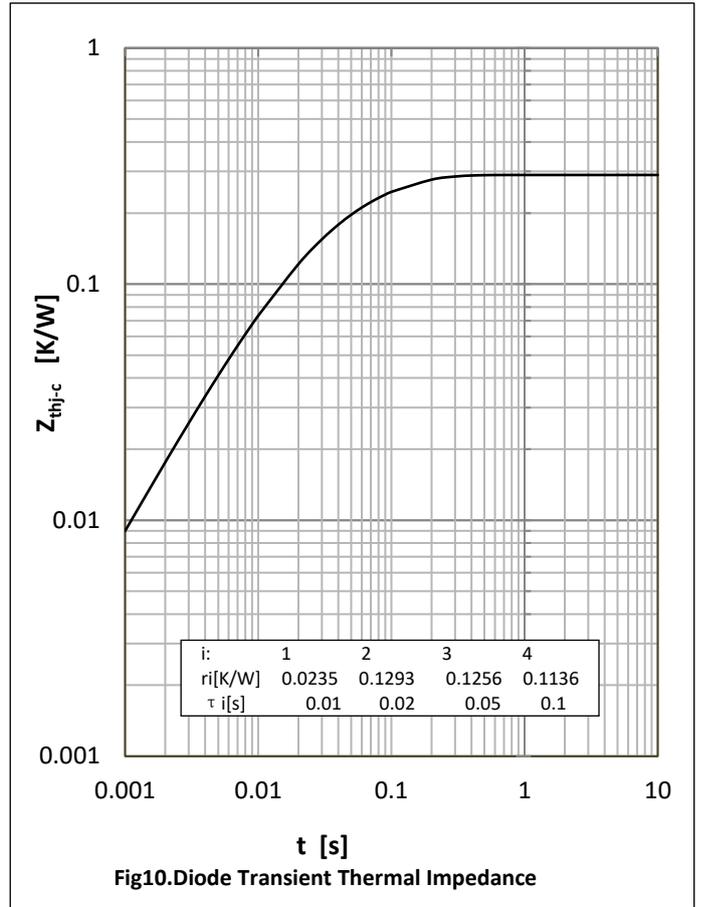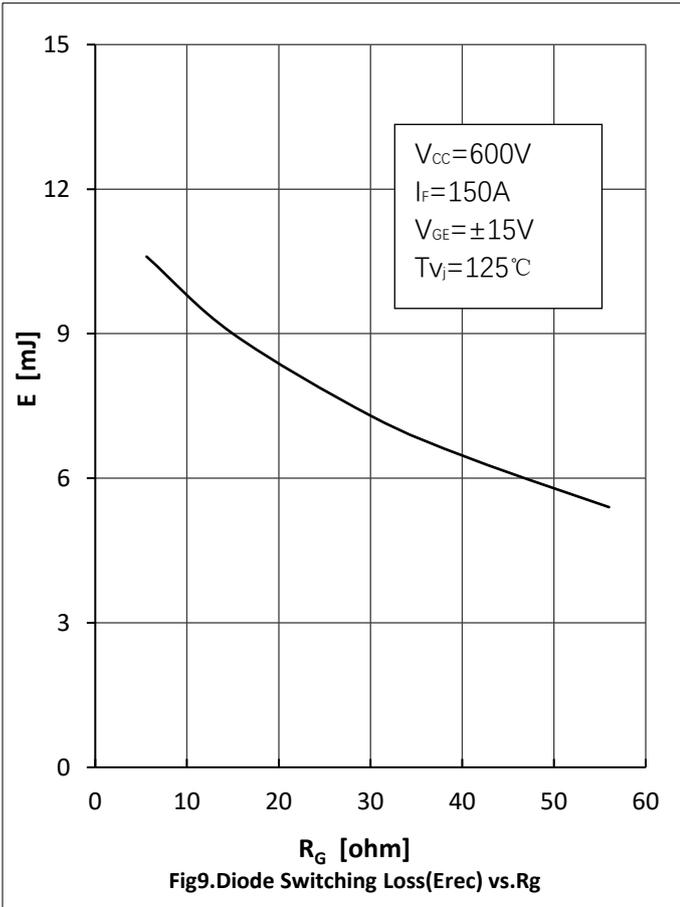



● Circuit Diagram

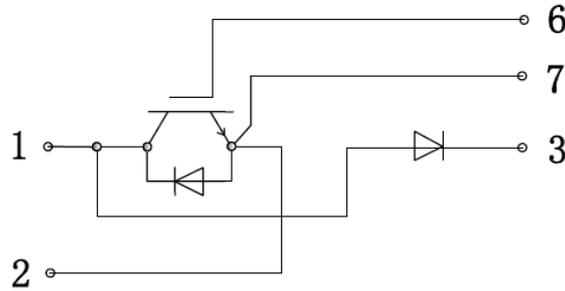

● Package Outline Information

Dimensions in Millimeters

