

IGBT Modules

V_{CES}	1200V
I_c	450A




Applications

- Motion/sevo control
- High frequency switching application
- UPS (Uninterruptible Power Supplies)
- Welding machine

Features

- Low $V_{ce(sat)}$ with Trench technology
- Low switching losses especially Eoff
- $V_{ce(sat)}$ with positive temperature coefficient
- High short circuit capability(10us)
- Including ultra fast & soft recovery anti-parallel FWD
- Low inductance package
- Maximum junction temperature 175°C

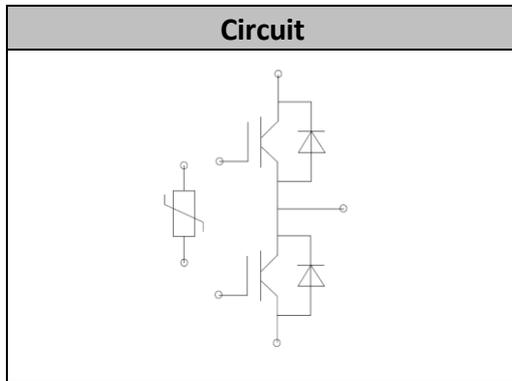

● IGBT

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Collector-Emitter Voltage	V_{CES}	$V_{GE}=0V, I_c = 1mA, T_{vj}=25^{\circ}C$	1200	V
Continuous Collector Current	I_c	$T_c=100^{\circ}C$	450	A
Repetitive Peak Collector Current	I_{CRM}	$t_p=1ms$	900	A
Gate-Emitter Voltage	V_{GES}	$T_{vj}=25^{\circ}C$	± 20	V
Total Power Dissipation	P_{tot}	$T_c=25^{\circ}C$ $T_{vjmax}=175^{\circ}C$	2340	W

**Characteristic values**

Parameter	Symbol	Conditions	Value			Unit		
			Min.	Typ.	Max.			
Gate-emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=12mA, T_{vj}=25^{\circ}C$	5.2	5.8	6.4	V		
Collector-Emitter Cut-off Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V, T_{vj}=25^{\circ}C$			1.0	mA		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=450A, V_{GE}=15V, T_{vj}=25^{\circ}C$		1.85	2.20	V		
		$I_C=450A, V_{GE}=15V, T_{vj}=125^{\circ}C$		2.15				
		$I_C=450A, V_{GE}=15V, T_{vj}=150^{\circ}C$		2.25				
Gate Charge	Q_G			3.50		uC		
Internal Gate Resistance	R_{Gint}			1.67		Ω		
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$		25.0		nF		
Reverse Transfer Capacitance	C_{res}	$f=1MHz, T_{vj}=25^{\circ}C$		1.10		nF		
Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=20V, T_{vj}=25^{\circ}C$			400	nA		
Turn-on Delay Time	$t_{d(on)}$	$I_C=450A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=3\Omega$ $T_{vj}=25^{\circ}C$		285		ns		
Rise Time	t_r			136		ns		
Turn-off Delay Time	$t_{d(off)}$			732		ns		
Fall Time	t_f			109		ns		
Energy Dissipation During Turn-on Time	E_{on}			62.6		mJ		
Energy Dissipation During Turn-off Time	E_{off}			42.8		mJ		
Turn-on Delay Time	$t_{d(on)}$		$I_C=450A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=3\Omega$ $T_{vj}=125^{\circ}C$		325		ns	
Rise Time	t_r				142		ns	
Turn-off Delay Time	$t_{d(off)}$				753		ns	
Fall Time	t_f				127		ns	
Energy Dissipation During Turn-on Time	E_{on}				75.3		mJ	
Energy Dissipation During Turn-off Time	E_{off}				62.3		mJ	
Turn-on Delay Time	$t_{d(on)}$			$I_C=450A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=3\Omega$ $T_{vj}=150^{\circ}C$		348		ns
Rise Time	t_r					156		ns
Turn-off Delay Time	$t_{d(off)}$				766		ns	
Fall Time	t_f				135		ns	
Energy Dissipation During Turn-on Time	E_{on}		83.4			mJ		
Energy Dissipation During Turn-off Time	E_{off}		72.1			mJ		
SC Data	I_{sc}	$T_p \leq 10\mu s, V_{GE}=15V,$ $T_{vj}=150^{\circ}C, V_{cc}=900V,$ $V_{CEM} \leq 1200V$			2250		A	



● Diode

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	$T_{vj}=25^{\circ}\text{C}$	1200	V
Continuous DC Forward Current	I_F		450	A
Repetitive Peak Forward Current	I_{FRM}	$t_p=1\text{ms}$	900	A
I^2t -value	I^2t	$V_R=0, t_p=10\text{ms}, T_j=125^{\circ}\text{C}$	32000	A ² s
		$V_R=0, t_p=10\text{ms}, T_j=150^{\circ}\text{C}$	30000	

Characteristic values

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	$I_F=450\text{A}, T_{vj}=25^{\circ}\text{C}$		1.90		V
		$I_F=450\text{A}, T_{vj}=125^{\circ}\text{C}$		1.80		
		$I_F=450\text{A}, T_{vj}=150^{\circ}\text{C}$		1.75		
Recovered Charge	Q_{rr}	$I_F=450\text{A}$		32		uC
Peak Reverse Recovery Current	I_{rr}	$V_R=600\text{V}$ $-di_F/dt=6000\text{A/us}$		225		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=25^{\circ}\text{C}$		13.5		mJ
Recovered Charge	Q_{rr}	$I_F=450\text{A}$		47		uC
Peak Reverse Recovery Current	I_{rr}	$V_R=600\text{V}$ $-di_F/dt=6000\text{A/us}$		337		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=125^{\circ}\text{C}$		21.4		mJ
Recovered Charge	Q_{rr}	$I_F=450\text{A}$		55		uC
Peak Reverse Recovery Current	I_{rr}	$V_R=600\text{V}$ $-di_F/dt=6000\text{A/us}$		380		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=150^{\circ}\text{C}$		25.6		mJ

● NTC-Thermistor

Characteristic values





Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Rated Resistance	R_{25}			5.0		k Ω
Deviation of R100	$\Delta R/R$	$T_C=100, R_{100}=493.3\Omega$	-5		5	%
Power Dissipation	P_{25}				20.0	mW
B-value	$B_{25/50}$	$R_2=R_{25}\exp[B_{25/50}(1/T_2-1/(298.15\text{K}))]$		3375		K










● Module Characteristics

 $T_c=25^{\circ}\text{C}$ unless otherwise specified


Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Isolation voltage	V_{isol}	$t=1\text{min}, f=50\text{Hz}$	2500			V
Maximum Junction Temperature	T_{jmax}				175	$^{\circ}\text{C}$
Operating Junction Temperature	T_{vjop}		-40		150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}		-40		125	$^{\circ}\text{C}$
Thermal Resistance Junction-to Case	$R_{\theta\text{JC}}$	per IGBT			0.065	K/W
		per Diode			0.13	
Thermal Resistance Case-to Sink	$R_{\theta\text{CS}}$	Conductive grease applied		0.009		K/W
Comparative Tracking Index	CTI			>200		
Module Electrodes Torque	M_t	Recommended(M5)	3.0		5.0	N·m
Module-to-Sink Torque	M_s	Recommended(M6)	3.0		5.0	N·m
Weight of Module	G			345		g

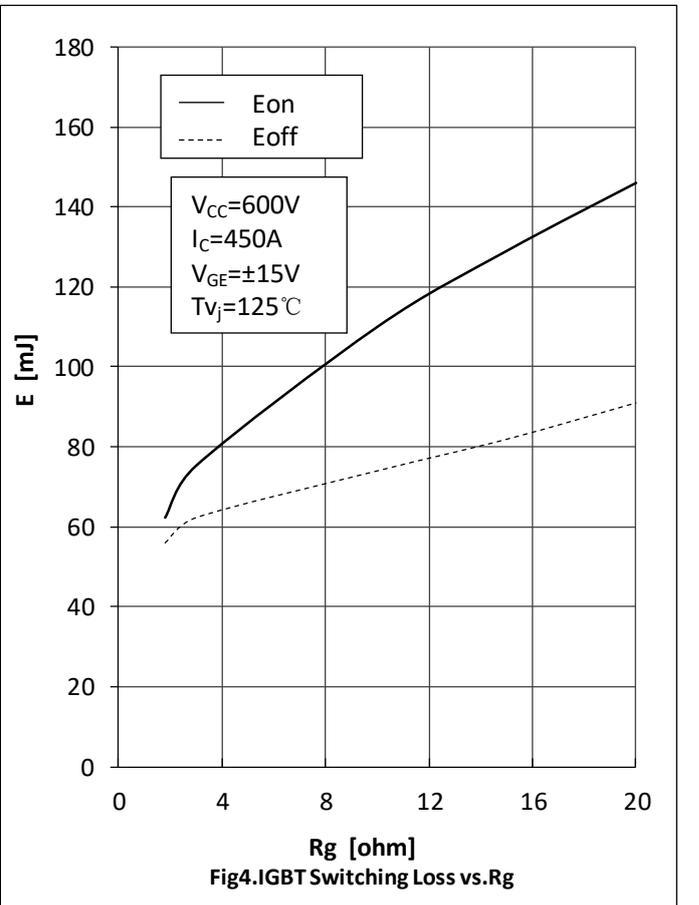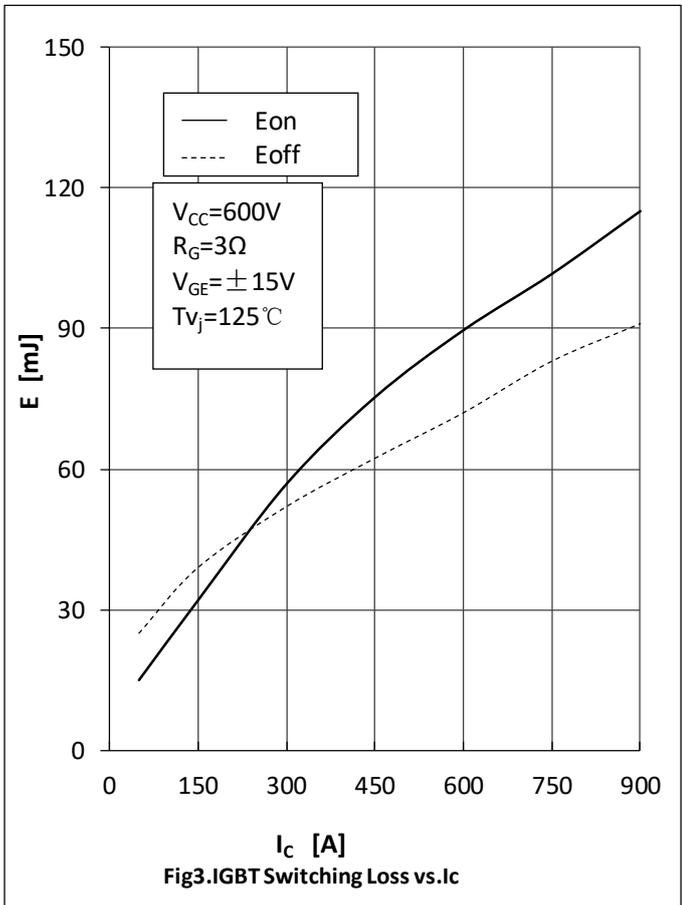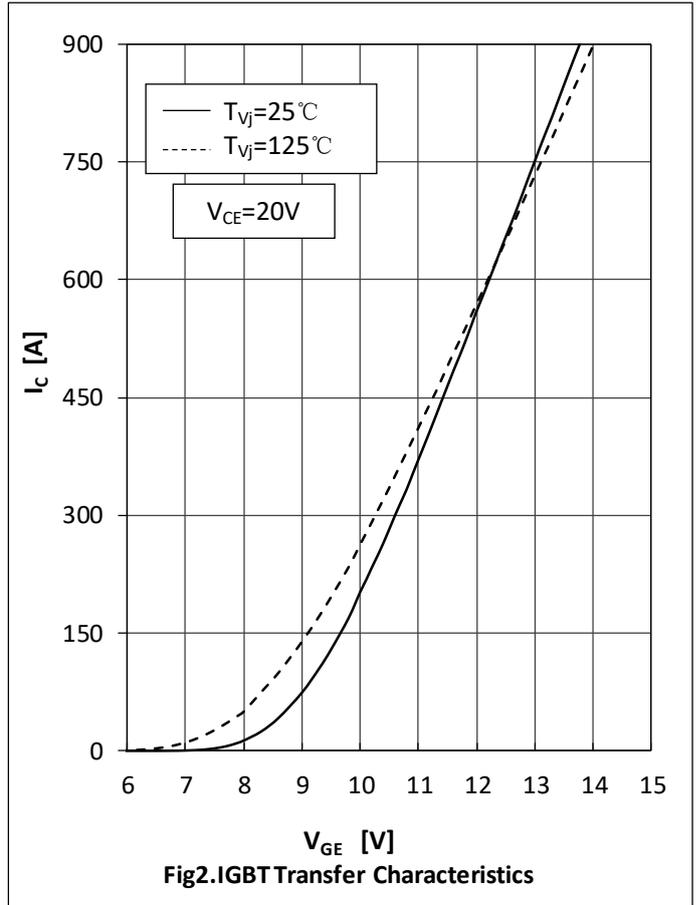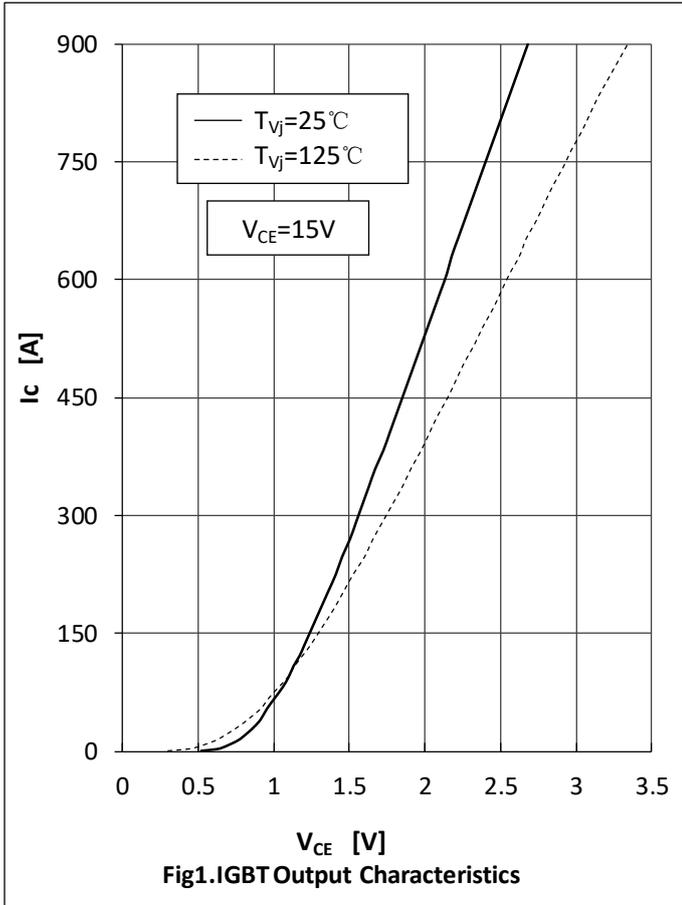

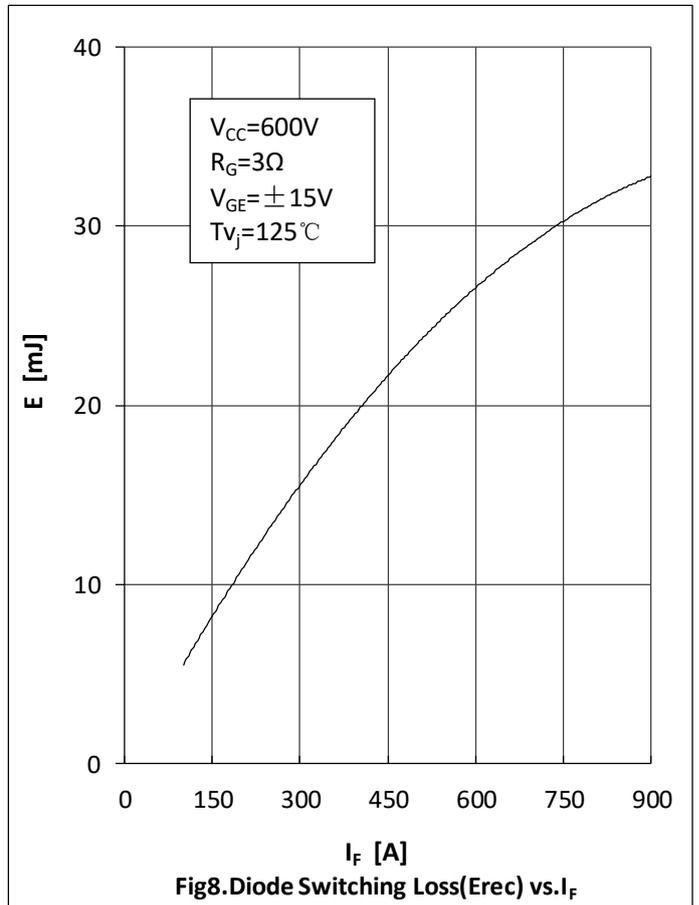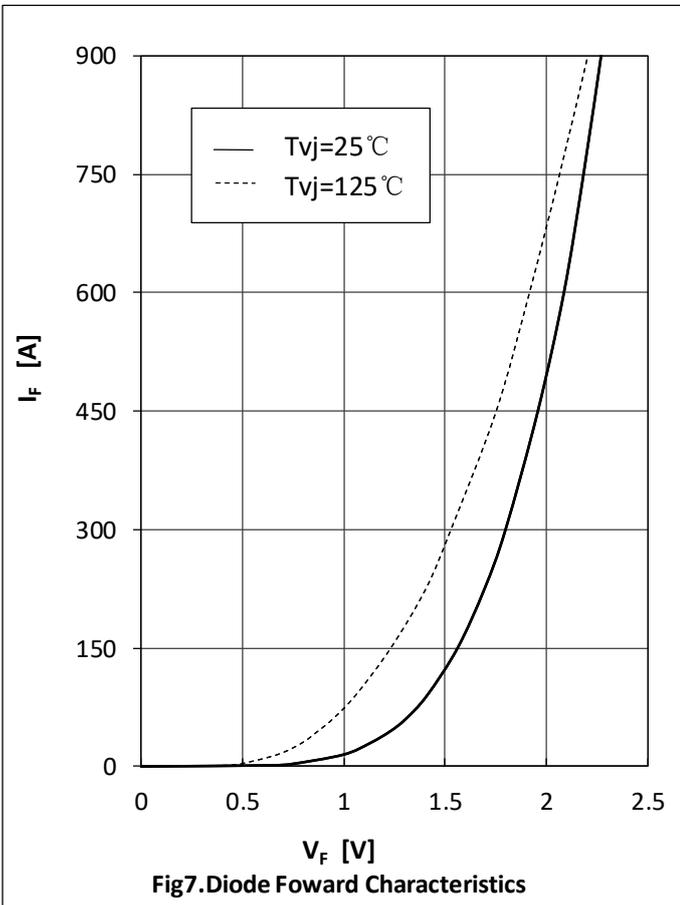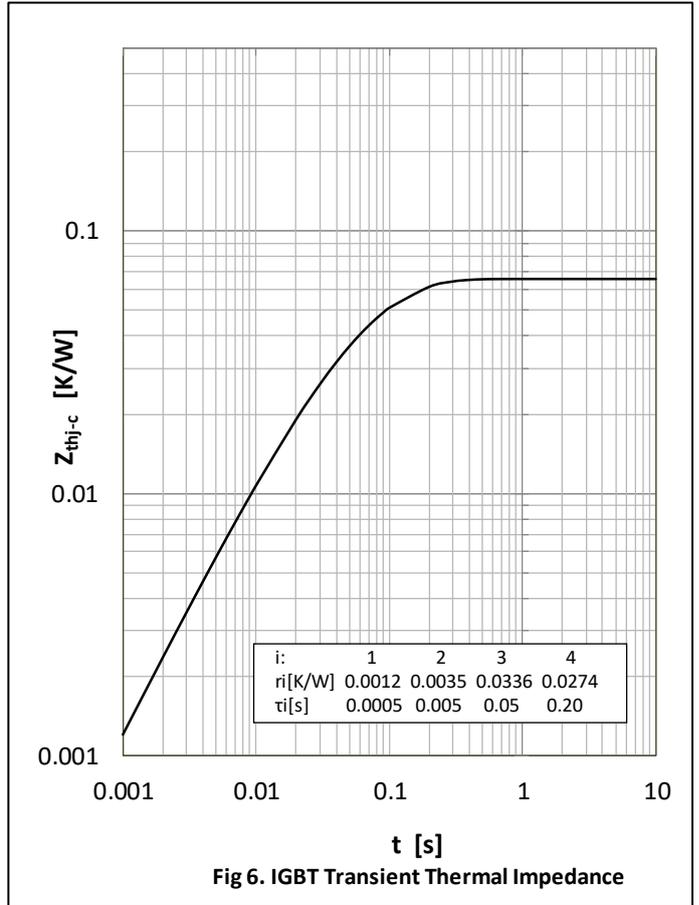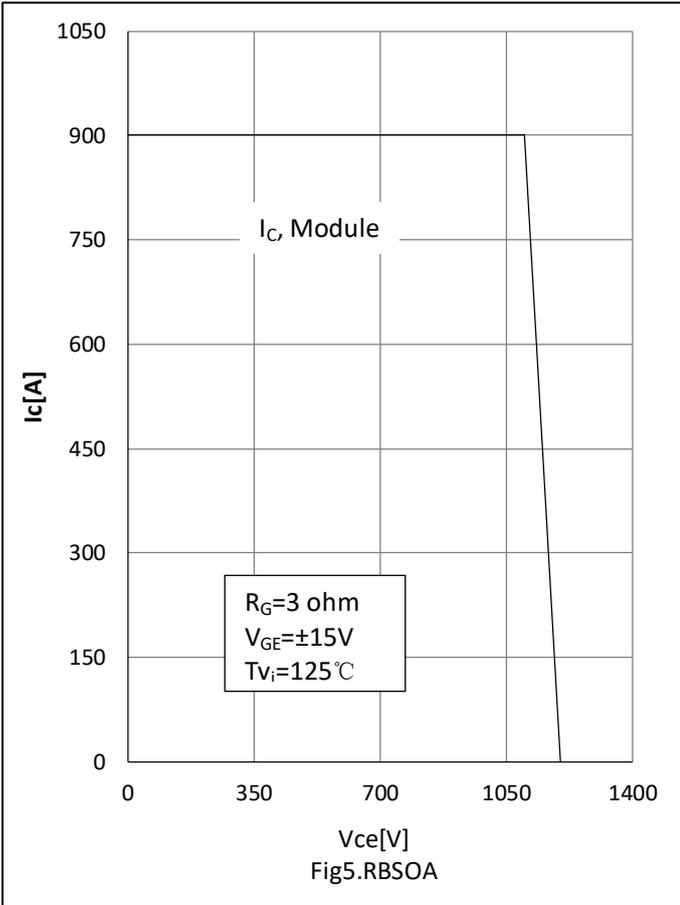


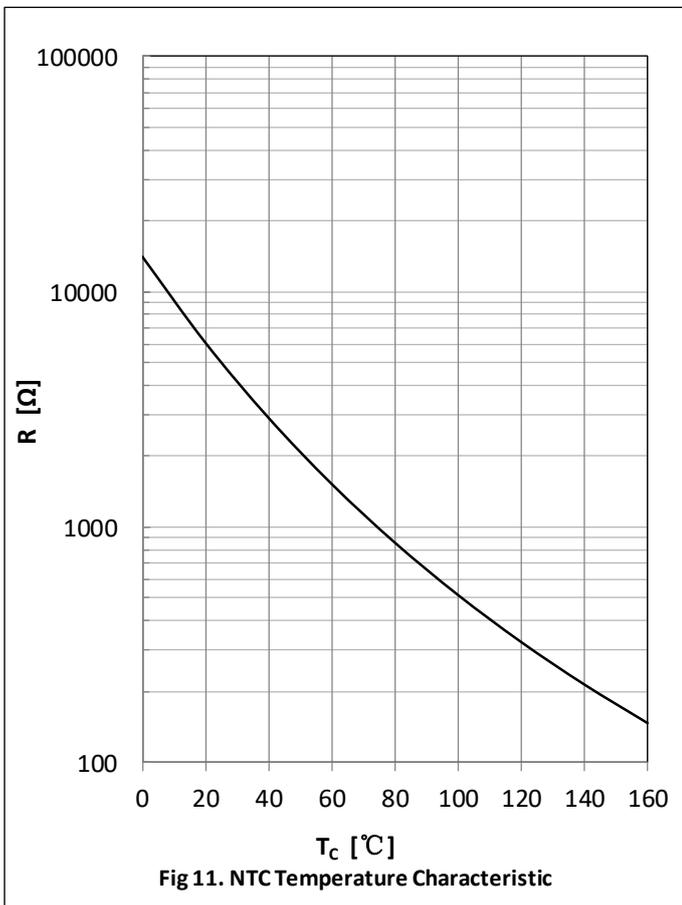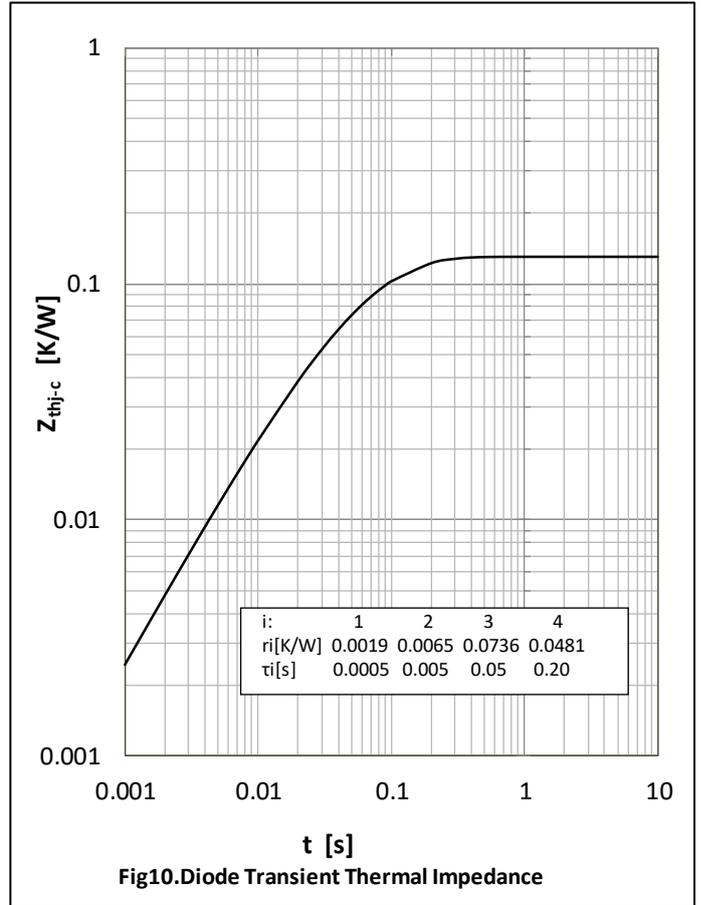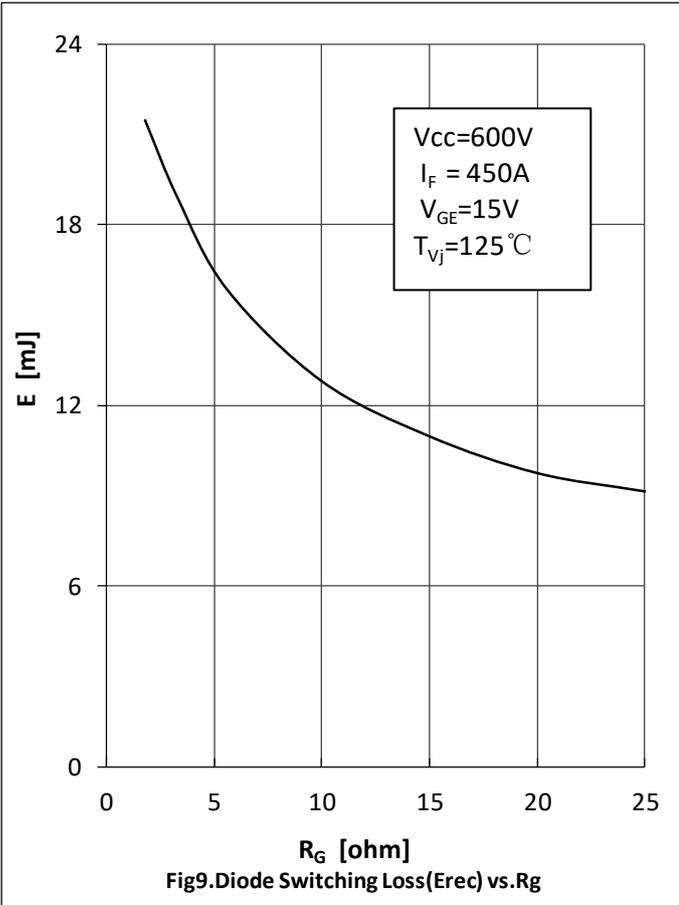

● Circuit Diagram

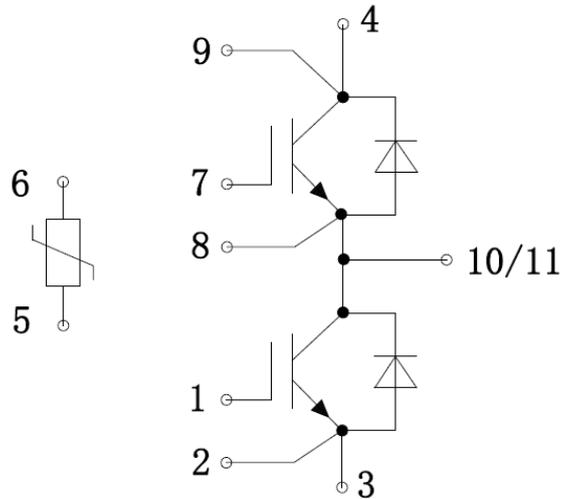

● Package Outline Information

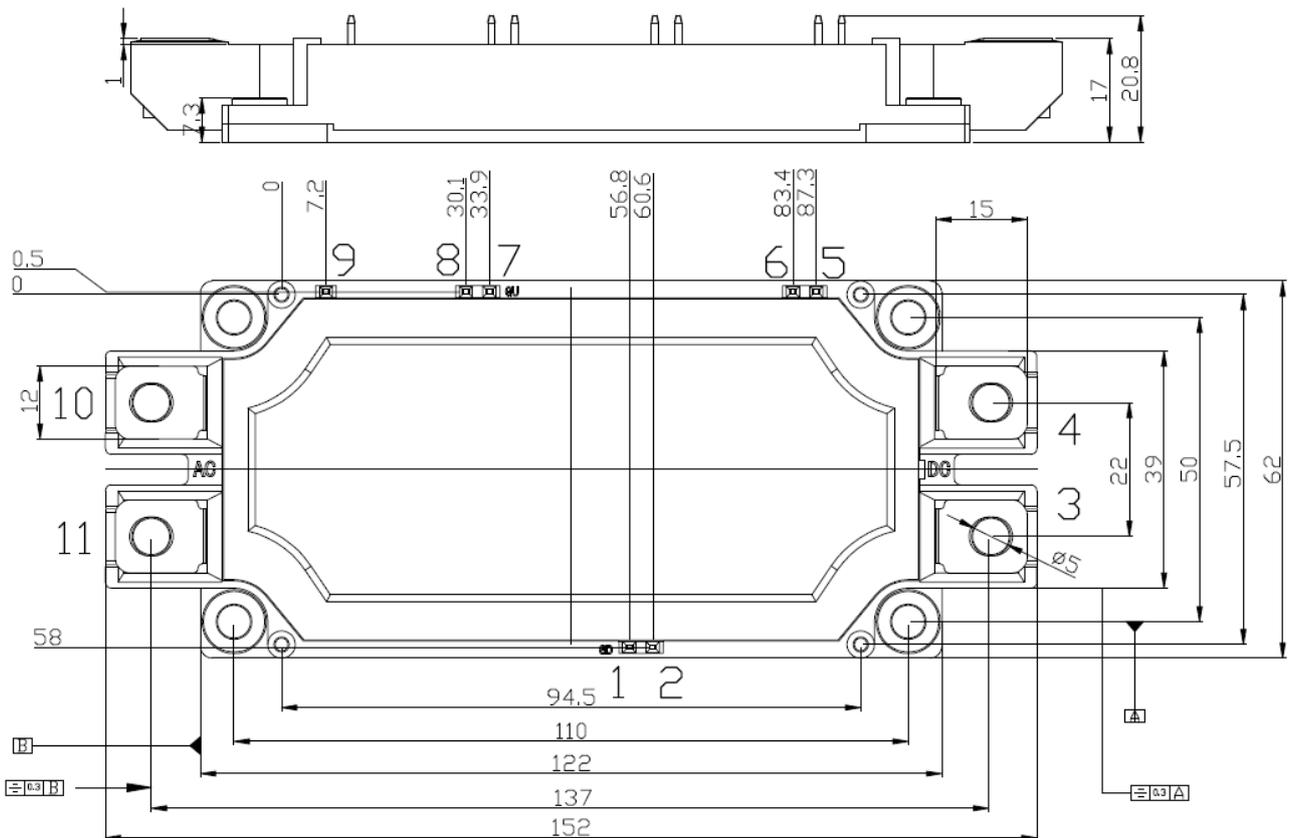



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.