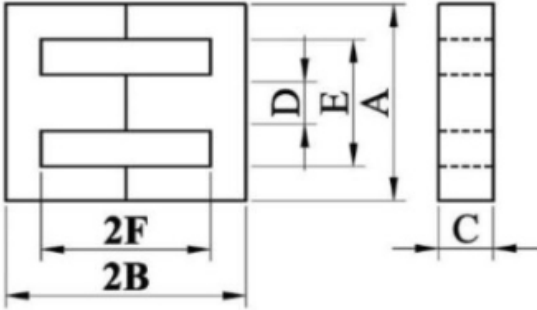


越峰電子材料股份有限公司 ACME Electronics Corporation			規格狀態(Spec situation) 暫規																									
客戶特殊規格書 (Customer Specification)	品名: (Part No.)	客戶名稱 (Customer)	生效日期(Effective Date) 2023/7/26																									
	P42EE65/26.9/32.5	客戶料號(Customer P/N)	客戶圖紙號(Customer revision No.)																									
圖紙面型(Drawing)																												
																												
E-CORE尺寸規格:Dimensions(mm)																												
<table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td></tr><tr><td>65.15±1.35</td><td>32.50±0.30</td><td>26.90±0.50</td><td>19.65±0.35</td><td>45.10±0.90</td><td>22.60±0.40</td></tr><tr><td colspan="2">Ae</td><td colspan="4">Le</td></tr><tr><td colspan="2">533.52mm²</td><td colspan="4">146.98mm</td></tr></table>					A	B	C	D	E	F	65.15±1.35	32.50±0.30	26.90±0.50	19.65±0.35	45.10±0.90	22.60±0.40	Ae		Le				533.52mm²		146.98mm			
A	B	C	D	E	F																							
65.15±1.35	32.50±0.30	26.90±0.50	19.65±0.35	45.10±0.90	22.60±0.40																							
Ae		Le																										
533.52mm²		146.98mm																										
電磁特性規格 (Electrical Characteristics):																												
<table><tr><td>材質</td><td>初導磁率</td><td>電感係數</td></tr><tr><td>(Material)</td><td>μi</td><td>AL(nH/N²)</td></tr><tr><td>P42</td><td>1800±25%</td><td>6600±25%</td></tr></table>					材質	初導磁率	電感係數	(Material)	μi	AL(nH/N²)	P42	1800±25%	6600±25%															
材質	初導磁率	電感係數																										
(Material)	μi	AL(nH/N²)																										
P42	1800±25%	6600±25%																										
測試條件(Testing Method):																												
<table><tr><td>測試條件 (Condition)</td><td>10KHz/50mV</td></tr><tr><td>測試儀器 (Equipment)</td><td>E4980A/卡尺</td></tr><tr><td>測試溫度 (Temperature)</td><td>室溫(25℃±3℃)</td></tr><tr><td>線圈(Winding)</td><td>φ0.25mm/10Ts</td></tr></table>					測試條件 (Condition)	10KHz/50mV	測試儀器 (Equipment)	E4980A/卡尺	測試溫度 (Temperature)	室溫(25℃±3℃)	線圈(Winding)	φ0.25mm/10Ts																
測試條件 (Condition)	10KHz/50mV																											
測試儀器 (Equipment)	E4980A/卡尺																											
測試溫度 (Temperature)	室溫(25℃±3℃)																											
線圈(Winding)	φ0.25mm/10Ts																											
其它規定 (Others):																												
1、自繞綫包 (Handmade coil) .																												
核准(Approve) : 林秉翰		審查(Check) :		制定(Prepared By) : 石超希																								
				頁次(Page):1/1 工廠GZ																								