



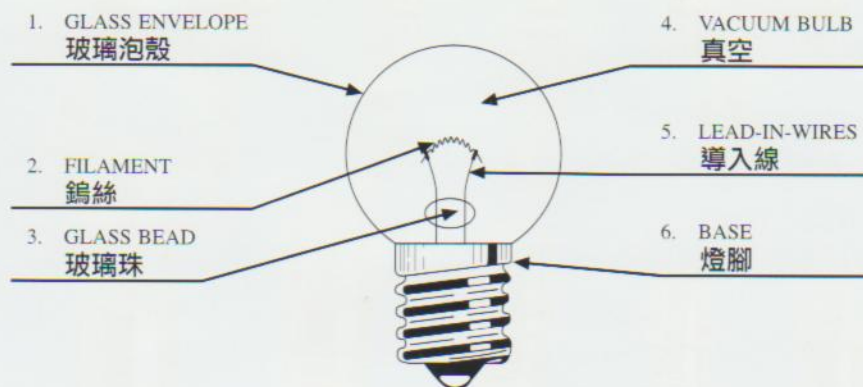


FILAMENT SHAPE 鎢絲形狀

C = coil, CC = coiled-coil (double coil), S = straight
圈 雙圈 直絲

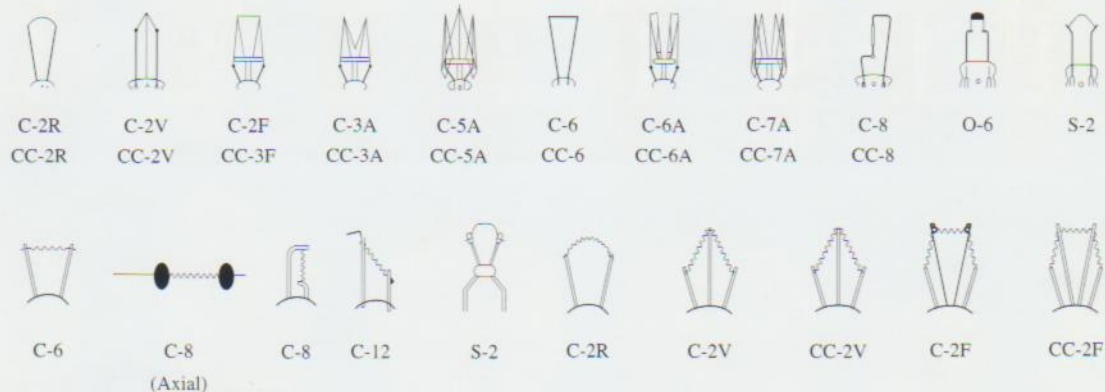

BASES 燈腳

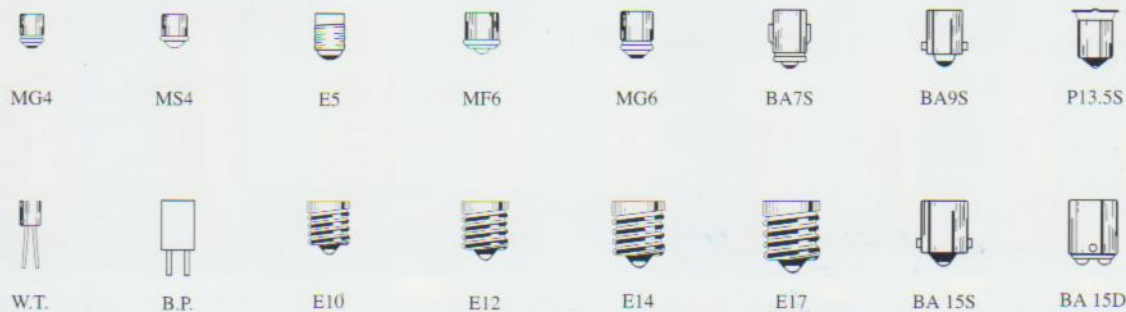



H-79
Ø4X13mm



H-80
Ø4.7X15mm



H-36
Ø5.5X15mm



H-37
Ø4.7X15mm



H-38
Ø4.7X15mm



H-6
Ø7X20mm



H-4
Ø9X23mm



H-3
Ø9X23mm



H-27
Ø10X28mm



H-2
Ø10X28mm



H-1
Ø10X28mm



H-5
Ø13X34mm



H-64
Ø16X35mm



H-65
Ø16X45mm



H-66
Ø16X54mm



H-78
Ø7X15mm



H-10
Ø11X24mm



H-11
Ø11X24mm



H-12
Ø15X28mm



H-13
Ø15X28mm



H-26
Ø15X28mm



H-77
Ø15X28mm



H-61
Ø17X30mm



H-62
Ø17X30mm



H-31
Ø18X37mm



H-30
Ø18X37mm



H-74
Ø30X45mm



H-75
Ø30X45mm



H-32
Ø25X50mm



H-63
Ø19X50mm



H-14
Ø9.5X23mm



H-15
Ø11X24mm



H-17
Ø11X30mm



H-29
Ø11X30mm



H-76
Ø11X28mm



H-16
Ø10X28mm



H-7
Ø14X30mm



H-8
Ø14X30mm



H-9
Ø14X30mm



H-49
Ø5.5X28mm




H-51
Ø6.5X36mm



H-50
Ø6.5X32mm



H-52
Ø8X36mm



H-53
Ø11X39mm



H-54
Ø11X42mm



H-71
Ø13.5X45mm



H-21
Ø13.5X45mm



H-20
Ø13.5X45mm



H-68
Ø17X49mm



H-70
Ø16.5X50mm



H-72
Ø25X45mm



H-73
Ø25X45mm



H-67
Ø17X55mm



H-22
Ø22X54mm



H-25
Ø21X57mm



H-69
Ø11X65mm



H-24
Ø25X75mm



H-23
Ø25X75mm



H-35
Ø3.5X11mm



H-33
Ø4X13mm



H-39
Ø3X8mm



H-40
Ø4X10mm



H-41
Ø4.7X10mm



H-42
Ø4X10mm



H-43
Ø4.7X10mm



H-28
Ø5X23mm



H-34
Ø5X23mm



H-55
Ø4X10.5mm



H-56
Ø5X12mm



H-57
Ø6X13mm



H-58
Ø6X16mm



H-59
Ø6X18mm



H-44
Ø3X15mm



H-45
Ø4X15mm



H-46
Ø4X19mm



H-47
Ø6.5X30mm



H-84
Ø5X20mm




H-85
Ø10X25mm



H-86
Ø15X35mm



H-81
Ø3X9.5mm



H-82
Ø4X15mm



H-83
Ø4.7X15mm




H-19
Ø5X30mm




H-18
Ø5.5X32mm

LAMP HOLDER TYPE 燈座類


E10H1




E10H2




E10H3




E10H4




E10H5





E10H6




E10H7




E10H8




E10H10



BA9SH1




BA9SH2




BA9SH3



E5H1




E5H2



E5H3



E5H4



MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓


RATING
AMP.
電流
WATT.
功率

FILA-
MENT
鎢絲形狀

TUBULAR MINIATURE IN DIA T10X28MM (T3 1/4), MIN. SCREW BASE

中收泡

H-1



BASE: E10 燈腳

H1-02006	2V	0.06A	0.12W	C-2R
H1-02505	2.5V	0.5A	1.25W	C-2R
H1-04805	4.8V	0.5A	2.4W	C-2R
H1-0605	6V	0.5A	3W	C-2R
H1-063015	6.3V	0.15A	0.95W	C-2R
H1-12025	12V	0.25A	3W	C-2V
H1-14015	14V	0.15A	2.1W	C-2V
H1-18015	18V	0.15A	2.7W	C-2V
H1-240125	24V	0.125A	3W	C-2V
H1-28017	28V	0.17A	4.8W	C-2F
H1-38005	38V	0.05A	1.9W	C-2F
H1-55005	55V	0.05A	2.75W	C-2F
H1-60004	60V	0.04A	2.4W	C-2F
H1-90003	90V	0.03A	2.7W	C-2F
H1-110002	110V	0.02A	2.2W	C-2F
H1-130002	130V	0.02A	2.6W	CC-3

TUBULAR MINIATURE IN DIA T10X28MM (T3 1/4), MIN. BAYONET BASE

中收泡

H-2



BASE: BA9S 燈腳

H2-02006	2V	0.06A	0.12W	C-2R
H2-02505	2.5V	0.5A	1.25W	C-2R
H2-04805	4.8V	0.5A	2.4W	C-2R
H2-063025	6.3V	0.25A	1.5W	C-2R
H2-063015	6.3V	0.15A	0.95W	C-2R
H2-12025	12V	0.25A	3W	C-2V
H2-14015	14V	0.15A	2.1W	C-2V
H2-18015	18V	0.15A	2.7W	C-2V
H2-240125	24V	0.125A	3W	C-2V
H2-28017	28V	0.17A	4.8W	C-2F
H2-38005	38V	0.05A	1.9W	C-2F
H2-55005	55V	0.05A	2.75W	C-2F
H2-60004	60V	0.04A	2.4W	C-2F
H2-90003	90V	0.03A	2.7W	C-2F
H2-110002	110V	0.02A	2.2W	C-2F
H2-130002	130V	0.02A	2.6W	CC-3

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流


WATT.
功率

FILA-
MENT
鎢絲形狀

TUBULAR MINIATURE IN DIA T9X23MM (T3), MIN. SCREW BASE

小收泡

H-3




BASE: E10 燈腳

H3-02006	2V	0.06A	0.12W	C-2R
H3-02505	2.5V	0.5A	1.25W	C-2R
H3-03503	3.5V	0.3A	1W	C-2R
H3-04805	4.8V	0.5A	2.4W	C-2R
H3-0605	6V	0.5A	3W	C-2R
H3-0903	9V	0.3A	2.7W	C-2R
H3-1201	12V	0.1A	1.2W	C-2V
H3-14015	14V	0.15A	2.1W	C-2V
H3-18015	18V	0.15A	2.7W	C-2V
H3-240125	24V	0.125A	3W	C-2V
H3-28017	28V	0.17A	4.8W	C-2F
H3-34009	34V	0.09A	3W	C-2F
H3-38005	38V	0.05A	1.9W	C-2F
H3-48006	48V	0.06A	2.9W	C-2F
H3-55005	55V	0.05A	2.75W	C-2F
H3-60004	60V	0.04A	2.4W	CC-2F

TUBULAR MINIATURE IN DIA T9X23MM (T3), MIN. BAYONET BASE

小收泡

H-4



BASE: BA9S 燈腳

H4-02006	2V	0.06A	0.12W	C-2R
H4-02505	2.5V	0.5A	1.25W	C-2R
H4-03503	3.5V	0.3A	1W	C-2R
H4-06033	6V	0.33A	2W	C-2R
H4-0605	6V	0.5A	3W	C-2R
H4-06067	6V	0.67A	4W	C-2R
H4-0903	9V	0.3A	2.7W	C-2V
H4-12017	12V	0.17A	2W	C-2V
H4-12025	12V	0.25A	3W	C-2V
H4-12033	12V	0.33A	4W	C-2V
H4-18015	18V	0.15A	2.7W	C-2V
H4-24008	24V	0.08A	2W	C-2V
H4-240125	24V	0.125A	3W	C-2F
H4-28017	28V	0.17A	4.8W	C-2F
H4-34009	34V	0.09A	3W	C-2F
H4-48006	48V	0.06A	2.9W	C-2F
H4-60004	60V	0.04A	2.4W	CC-2F

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓


RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀

TUBULAR MINIATURE IN DIA T13X34MM (T4), CANDELABRA SCREW BASE 大收泡


H-5



BASE: E12 燈腳

H5-02006	2V	0.06A	0.12W	C-2R
H5-02505	2.5V	0.5A	1.25W	C-2R
H5-04805	4.8V	0.5A	2.4W	C-2R
H5-0605	6V	0.5A	3W	C-2R
H5-063015	6.3V	0.15A	0.95W	C-2R
H5-12025	12V	0.25A	3W	C-2V
H5-14015	14V	0.15A	2.1W	C-2V
H5-18015	18V	0.15A	2.7W	C-2V
H5-240125	24V	0.125A	3W	C-2V
H5-28017	28V	0.17A	4.8W	C-2F
H5-38005	38V	0.05A	1.9W	C-2F
H5-55005	55V	0.05A	2.75W	C-2F
H5-60004	60V	0.04A	2.4W	C-2F
H5-90003	90V	0.03A	2.7W	C-2F
H5-110002	110V	0.02A	2.2W	C-2F
H5-130002	130V	0.02A	2.6W	CC-3

H-6



BASE: BA7S 燈腳

H6-02006	2V	0.06A	0.12W	C-2R
H6-02505	2.5V	0.5A	1.25W	C-2R
H6-03503	3.5V	0.3A	1W	C-2R
H6-04805	4.8V	0.5A	2.4W	C-2R
H6-0605	6V	0.5A	3W	C-2R
H6-0601	6V	0.1A	0.6W	C-2R
H6-06025	6V	0.25A	1.5W	C-2R
H6-1201	12V	0.1A	1.2W	C-2V
H6-12017	12V	0.17A	2W	C-2V
H6-240125	24V	0.125A	3W	C-2V
H6-28017	28V	0.17A	4.8W	C-2F
H6-34009	34V	0.09A	3W	C-2F
H6-38005	38V	0.05A	1.9W	C-2F
H6-48006	48V	0.06A	2.9W	C-2F
H6-55005	55V	0.05A	2.75W	C-2F
H6-60004	60V	0.04A	2.4W	CC-2F

TUBULAR MINIATURE IN DIA T7X20MM (T2), BA7S BAYONET BASE


雙耳泡

MINIATURE LAMPS

FIGURE NO. 圖形編號	DRAWING 平面圖樣	LAMP NO. 燈泡編號	DESIGN VOLT. 額定電壓	RATING AMP. 電流	WATT. 功率	FILA- MENT 鎢絲形狀
--------------------	-----------------	------------------	-------------------------	----------------------	-------------	-----------------------

TUBULAR MINIATURE IN DIA T14X30MM, E14 SCREW BASE

平頭泡

H-7  BASE: E14 燈腳		H7-12025	12V	0.25A	3W	C-2V
		H7-14015	14V	0.15A	2.1W	C-2V
		H7-240125	24V	0.125A	3W	C-2V
		H7-28017	28V	0.17A	4.8W	C-2F
		H7-38005	38V	0.05A	1.9W	C-2F
		H7-60004	60V	0.04A	2.4W	C-2F
		H7-110002	110V	0.02A	2.2W	C-2F
		H7-130002	130V	0.02A	2.6W	CC-3


TUBULAR MINIATURE IN DIA T14X30MM, S.C. BAYONET BASE

平頭泡

H-8  BASE: BA15S 燈腳		H8-12025	12V	0.25A	3W	C-2V
		H8-14015	14V	0.15A	2.1W	C-2V
		H8-240125	24V	0.125A	3W	C-2V
		H8-28017	28V	0.17A	4.8W	C-2F
		H8-38005	38V	0.05A	1.9W	C-2F
		H8-60004	60V	0.04A	2.4W	C-2F
		H8-110002	110V	0.02A	2.2W	C-2F
		H8-130002	130V	0.02A	2.6W	CC-3

TUBULAR MINIATURE IN DIA T14X30MM, D.C. BAYONET BASE

平頭泡

H-9  BASE: BA15D 燈腳		H9-12025	12V	0.25A	3W	C-2V
		H9-14015	14V	0.15A	2.1W	C-2V
		H9-240125	24V	0.125A	3W	C-2V
		H9-28017	28V	0.17A	4.8W	C-2F
		H9-38005	38V	0.05A	1.9W	C-2F
		H9-60004	60V	0.04A	2.4W	C-2F
		H9-110002	110V	0.02A	2.2W	C-2F
		H9-130002	130V	0.02A	2.6W	CC-3

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀


SPHERICAL MINIATURE IN DIA G11X24MM (G3 1/2), MIN. SCREW BASE

小元泡

H-10



BASE: E10 燈腳



H10-01502	1.5V	0.2A	0.3W	C-2R
H10-02503	2.5V	0.3A	0.75W	C-2R
H10-03803	3.8V	0.3A	1.14W	C-2R
H10-0605	6V	0.5A	3W	C-2R
H10-1202	12V	0.2A	2.4W	C-2V
H10-240125	24V	0.125A	3W	C-2V
H10-34009	34V	0.09A	3W	C-2F


SPHERICAL MINIATURE IN DIA G11X24MM (G3 1/2), MIN. BAYONET BASE

小元泡

H-11



BASE: BA9S 燈腳



H11-02503	2.5V	0.3A	0.75W	C-2R
H11-063015	6.3V	0.15A	0.95W	C-2R
H11-1205	12V	0.5A	6W	C-2V
H11-240125	24V	0.125A	3W	C-2V
H11-48006	48V	0.06A	2.9W	C-2F
H11-60004	60V	0.04A	2.4W	C-2F


SPHERICAL MINIATURE IN DIA G15X28MM (G4 1/2), MIN. SCREW BASE

中元泡

H-12



BASE: E10 燈腳



H12-02503	2.5V	0.3A	0.75W	C-2R
H12-04903	4.9V	0.3A	1.47W	C-2R
H12-06203	6.2V	0.3A	1.86W	C-2R
H12-12025	12V	0.25A	3W	C-2V
H12-24012	24V	0.12A	2.8W	C-2V
H12-55005	55V	0.05A	2.8W	C-2F
H12-110002	110V	0.02A	2.2W	CC-2F
H12-130002	130V	0.02A	2.6W	CC-3


SPHERICAL MINIATURE IN DIA G15X28MM (G4 1/2), MIN. BAYONET BASE

中元泡

H-13



BASE: BA9S 燈腳



H13-02503	2.5V	0.3A	0.75W	C-2R
H13-0605	6V	0.5A	3W	C-2R
H13-1205	12V	0.5A	6W	C-2V
H13-24012	24V	0.12A	2.8W	C-2V
H13-24025	24V	0.25A	6W	C-2F
H13-28017	28V	0.17A	4.8W	C-2F
H13-60004	60V	0.04A	2.4W	C-2F
H13-110002	110V	0.02A	2.2W	CC-2F
H13-130002	130V	0.02A	2.6W	CC-3

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀


LENS-END BULB IN DIA TL9.5X23MM, MIN. SCREW BASE

筆晶泡

H-14



BASE: E10 燈腳



H14-01103	1.1V	0.3A	0.33W	C-6
H14-01202	1.2V	0.2A	0.24W	C-6
H14-022018	2.2V	0.18A	0.4W	C-6
H14-022025	2.2V	0.25A	0.55W	C-6
H14-023027	2.3V	0.27A	0.62W	C-6
H14-02502	2.5V	0.2A	0.5W	C-6
H14-02503	2.5V	0.3A	0.75W	C-6
H14-03703	3.7V	0.3A	1.11W	C-6


LENS-END BULB IN DIA TL11X24MM, MIN. SCREW BASE

雙圈晶泡

H-15



BASE: E10 燈腳



H15-01103	1.1V	0.3A	0.33W	C-6
H15-01202	1.2V	0.2A	0.24W	C-6
H15-022018	2.2V	0.18A	0.4W	C-6
H15-022025	2.2V	0.25A	0.55W	C-6
H15-02203	2.2V	0.3A	0.66W	C-6
H15-023027	2.3V	0.27A	0.62W	C-6
H15-02502	2.5V	0.2A	0.5W	C-6
H15-02503	2.5V	0.3A	0.75W	C-6
H15-03303	3.3V	0.3A	0.99W	C-6
H15-03703	3.7V	0.3A	1.11W	C-6


TUBULAR LENS-END BULB IN DIA TL10X28MM (T3 1/4), MIN. SCREW BASE

直身晶泡

H-16



BASE: E10 燈腳



H16-01103	1.1V	0.3A	0.33W	C-6
H16-01202	1.2V	0.2A	0.24W	C-6
H16-022018	2.2V	0.18A	0.4W	C-6
H16-022025	2.2V	0.25A	0.55W	C-6
H16-023027	2.3V	0.27A	0.62W	C-6
H16-02502	2.5V	0.2A	0.5W	C-6
H16-02503	2.5V	0.3A	0.75W	C-6
H16-03703	3.7V	0.3A	1.11W	C-6

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀


PREFOCUS FLASH LIGHT, B11X30MM (B3 1/2) MIN. FLANGED BASE

原子泡

H-17



BASE: P13.5S 燈腳



H17-023027	2.3V	0.27A	0.62W	C-2R
H17-02405	2.4V	0.5A	1.2W	C-2R
H17-02503	2.5V	0.3A	0.75W	C-2R
H17-03605	3.6V	0.5A	1.8W	C-2R
H17-03803	3.8V	0.3A	1.14W	C-2R
H17-04805	4.8V	0.5A	2.4W	C-2R
H17-0605	6V	0.5A	3W	C-2R
H17-07205	7.2V	0.5A	3.6W	C-2R


X'MAS LAMP IN DIA 5.5X32MM, MIDGET SCREW BASE

E5 拉泡

H-18



BASE: E5 燈腳




H18-01501	1.5V	0.1A	0.15W	C-2R
H18-02501	2.5V	0.1A	0.25W	C-2R
H18-0301	3V	0.1A	0.3W	C-2R
H18-03501	3.5V	0.1A	0.35W	C-2R
H18-04501	4.5V	0.1A	0.45W	C-2R
H18-0601	6V	0.1A	0.6W	C-2R
H18-1201	12V	0.1A	1.2W	C-2V
H18-2401	24V	0.1A	2.4W	C-2F

X'MAS LAMP IN DIA 5X30MM, PLASTIC TUBE BASE

膠腳拉泡

H-19



H19-01501	1.5V	0.1A	0.15W	C-2R
H19-02501	2.5V	0.1A	0.25W	C-2R
H19-0301	3V	0.1A	0.3W	C-2R
H19-03501	3.5V	0.1A	0.35W	C-2R
H19-04501	4.5V	0.1A	0.45W	C-2R
H19-0601	6V	0.1A	0.6W	C-2R
H19-1201	12V	0.1A	1.2W	C-2V
H19-2401	24V	0.1A	2.4W	C-2F

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流
WATT.
功率

FILA-
MENT
鎢絲形狀


FANCY LAMP IN DIA 13.5X45MM, MIN. SCREW BASE

半紋中焦泡

H-20



BASE: E10 燈腳

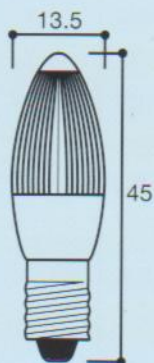

H20-014018	1.4V	0.18A	0.25W	C-2R
H20-06015	6V	0.15A	0.9W	C-2R
H20-12025	12V	0.25A	3W	C-2V
H20-14021	14V	0.21A	3W	C-2V
H20-23013	23V	0.13A	3W	C-2V
H20-34009	34V	0.09A	3W	C-2F
H20-48006	48V	0.06A	3W	C-2F
H20-550055	55V	0.055A	3W	C-2F

FANCY LAMP IN DIA 13.5X45MM, MIN. SCREW BASE

全紋中焦泡

H-21



BASE: E10 燈腳



H21-014018	1.4V	0.18A	0.25W	C-2R
H21-06015	6V	0.15A	0.9W	C-2R
H21-12025	12V	0.25A	3W	C-2V
H21-14021	14V	0.21A	3W	C-2V
H21-23013	23V	0.13A	3W	C-2V
H21-34009	34V	0.09A	3W	C-2F
H21-48006	48V	0.06A	3W	C-2F
H21-550055	55V	0.055A	3W	C-2F

H21-34025 34V 0.25A Hk0.35/pc


CANDLE LIGHT BULB IN DIA 22X54MM (C7), MIN. SCREW BASE

C7 泡

H-22



BASE: E10 燈腳

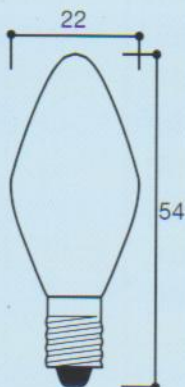

H22-014018	1.4V	0.18A	0.25W	C-2R
H22-06015	6V	0.15A	0.9W	C-2R
H22-12025	12V	0.25A	3W	C-2V
H22-14021	14V	0.21A	3W	C-2V
H22-23013	23V	0.13A	3W	C-2V
H22-34009	34V	0.09A	3W	C-2F
H22-48006	48V	0.06A	3W	C-2F
H22-550055	55V	0.055A	3W	C-2F

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀

MINIATURE IN DIA 25X75MM (C9), CANDELABRA SCREW BASE

C9 子母泡

H-23



BASE: E12 燈腳



H23-01501	1.5V	0.1A	0.15W	C-2R
H23-02501	2.5V	0.1A	0.25W	C-2R
H23-0301	3V	0.1A	0.3W	C-2R
H23-03501	3.5V	0.1A	0.35W	C-2R
H23-04501	4.5V	0.1A	0.45W	C-2R
H23-06005	6V	0.05A	0.3W	C-2R
H23-0601	6V	0.1A	0.6W	C-2R
H23-07005	7V	0.05A	0.35W	C-2R


MINIATURE LAMP IN DIA 25X75MM (C9), CANDELABRA SCREW BASE

C9 泡

H-24



BASE: E12 燈腳

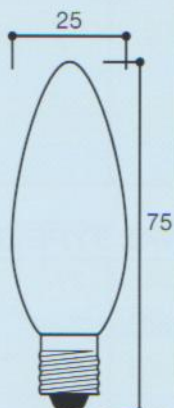

H24-014018	1.4V	0.18A	0.25W	C-2R
H24-06015	6V	0.15A	0.9W	C-2R
H24-12025	12V	0.25A	3W	C-2V
H24-14021	14V	0.21A	3W	C-2V
H24-23013	23V	0.13A	3W	C-2V
H24-34009	34V	0.09A	3W	C-2F
H24-48006	48V	0.06A	3W	C-2F
H24-550055	55V	0.055A	3W	C-2F


MINIATURE LAMP IN DIA 21X57MM (C6), CANDELABRA SCREW BASE

C6 泡

H-25



BASE: E12 燈腳




H25-014018	1.4V	0.18A	0.25W	C-2R
H25-06015	6V	0.15A	0.9W	C-2R
H25-12025	12V	0.25A	3W	C-2V
H25-14021	14V	0.21A	3W	C-2V
H25-23013	23V	0.13A	3W	C-2V
H25-34009	34V	0.09A	3W	C-2F
H25-48006	48V	0.06A	3W	C-2F
H25-550055	55V	0.055A	3W	C-2F

MINIATURE LAMPS


(FILAMENT TYPE: C-2R BI METAL)

FIGURE NO. 圖形編號	DRAWING 平面圖樣	LAMP NO. 燈泡編號	DESIGN VOLT. 額定電壓	RATING AMP. 電流	WATT. 功率	FILA- MENT 鎢絲形狀
--------------------	-----------------	------------------	-------------------------	----------------------	-------------	-----------------------


SPHERICAL MINIATURE IN DIA 15X28MM (G4 1/2), MIN. SCREW BASE BLINKING TYPE 中元閃膽

H-26  BASE: E10 燈腳		H26-0203	2V	0.3A	0.6W	C-2R
		H26-02503	2.5V	0.3A	0.75W	C-2R
		H26-03803	3.8V	0.3A	1.14W	C-2R
		H26-04805	4.8V	0.5A	2.4W	C-2R
		H26-0605	6V	0.5A	3W	C-2R


TUBULAR MINIATURE IN DIA 10X28MM (T3X 1/4), MIN. BAYONET BASE BLINKING TYPE 中收閃膽

H-27  BASE: BA9S 燈腳		H27-0203	2V	0.3A	0.6W	C-2R
		H27-02503	2.5V	0.3A	0.75W	C-2R
		H27-03803	3.8V	0.3A	1.14W	C-2R
		H27-04805	4.8V	0.5A	2.4W	C-2R
		H27-0605	6V	0.5A	3W	C-2R

X' MAS LAMP IN DIA 5X23MM, WIRE TERMINAL TYPE BLINKING TYPE 拉拉閃膽

H-28  BASE: WIRE TERMINAL 燈腳		H28-0203	2V	0.3A	0.6W	C-2R
		H28-02503	2.5V	0.3A	0.75W	C-2R
		H28-03803	3.8V	0.3A	1.14W	C-2R
		H28-04805	4.8V	0.5A	2.4W	C-2R
		H28-0605	6V	0.5A	3W	C-2R

PREFOCHS FLASHLIGHT BULB B11X30MM (B3 1/2), MIN. SCREW BASE BLINKING TYPE 原子閃膽

H-29  BASE: E10 燈腳		H29-0203	2V	0.3A	0.6W	C-2R
		H29-02503	2.5V	0.3A	0.75W	C-2R
		H29-03803	3.8V	0.3A	1.14W	C-2R
		H29-04805	4.8V	0.5A	2.4W	C-2R
		H29-0605	6V	0.5A	3W	C-2R

AUTOMOBILE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率


FILA-
MENT
鎢絲形狀

SPHERICAL AUTO BULB IN DIA G18X37MM (G6), S.C. BAYONET BASE 單孔車尾泡

H-30



BASE: BA15S 燈腳




H30-0605	6V	0.5A	3W	C-2R
H30-06083	6V	0.83A	3CP/5W	C-2R
H30-0613	6V	1.3A	6CP/8W	C-2R
H30-06167	6V	1.67A	6CP/10W	C-2R
H30-12025	12V	0.25A	3W	C-2R
H30-12042	12V	0.42A	4CP/5W	C-2R
H30-12083	12V	0.83A	10CP/10W	C-2R
H30-12067	12V	0.67A	6CP/8W	C-2R
H30-24021	24V	0.21A	3CP/5W	C-2V
H30-24042	24V	0.42A	10W	C-2V

SPHERICAL AUTO BULB IN DIA G18X37MM (G6), D.C. BAYONET BASE 雙孔車尾泡

H-31



BASE: BA15D 燈腳



H31-06083	6V	0.83A	3CP/5W	C-2R
H31-0605	6V	0.5A	3W	C-2R
H31-0613	6V	1.3A	6CP/5W	C-2R
H31-12025	12V	0.25A	3W	C-2R
H31-12042	12V	0.42A	5W	C-2R
H31-12067	12V	0.67A	4CP/8W	C-2R
H31-12083	12V	0.83A	10CP/10W	C-2R
H31-24021	24V	0.21A	3CP/5W	C-2V
H31-24042	24V	0.42A	10CP/10W	C-2V

AUTO BULB IN DIA S25X50MM (S8), S.C. BAYONET BASE 單孔汽車泡

H-32



BASE: BA15S 燈腳



H32-0615	6V	-----	15CP	C-6
H32-0621	6V	-----	21CP	C-6
H32-1215	12V	-----	15CP	C-2R
H32-1221	12V	-----	21CP	C-6
H32-1232	12V	-----	32CP	C-6
H32-1221	12V	-----	21W	C-6
H32-2415	24V	-----	15CP	C-2V
H32-2421	24V	-----	21CP	C-2V
H32-2424	24V	-----	24W	C-2V

SUB-MINIATURE LAMP TYPE

FIGURE NO. 圖形編號	DRAWING 平面圖樣	LAMP NO. 燈泡編號	DESIGN VOLT. 額定電壓	RATING AMP. 電流	WATT. 功率	FILA- MENT 鎢絲形狀
--------------------	-----------------	------------------	-------------------------	----------------------	-------------	-----------------------

X' MAS SUB-MINIATURE IN DIA 4X13MM, WIRE, TERMINAL TYPE 米拉泡

H-33  BASE: WIRE TERMINAL 燈腳		H33-01501	1.5V	0.1A	0.15W	C-2R
		H33-02502	2.5V	0.2A	0.5W	C-2R
		H33-0301	3V	0.1A	0.3W	C-2R
		H33-03501	3.5V	0.1A	0.35W	C-2R
		H33-04501	4.5V	0.1A	0.45W	C-2R
		H33-06005	6V	0.05A	0.3W	C-2R
		H33-0601	6V	0.1A	0.6W	C-2R

X' MAS SUB-MINIATURE IN DIA 5X23MM, WIRE, TERMINAL TYPE 米拉泡

H-34  BASE: WIRE TERMINAL 燈腳		H34-01501	1.5V	0.1A	0.15W	C-2R
		H34-02502	2.5V	0.2A	0.25W	C-2R
		H34-0301	3V	0.1A	0.3W	C-2R
		H34-03501	3.5V	0.1A	0.35W	C-2R
		H34-04501	4.5V	0.1A	0.45W	C-2R
		H34-06005	6V	0.05A	0.3W	C-2R
		H34-0601	6V	0.1A	0.6W	C-2R
		H34-07005	7V	0.05A	0.35W	C-2R
		H34-1201	12V	0.1A	1.2W	C-2V
		H34-24005	24V	0.05A	1.2W	C-2F


X' MAS SUB-MINIATURE IN DIA 3.5X11MM, WIRE, TERMINAL TYPE 米拉泡

H-35  BASE: WIRE TERMINAL 燈腳		H33-01501	1.5V	0.1A	0.15W	C-2R
		H33-02502	2.5V	0.12A	0.5W	C-2R
		H33-0301	3V	0.1A	0.3W	C-2R
		H33-03501	3.5V	0.1A	0.35W	C-2R
		H33-04501	4.5V	0.1A	0.45W	C-2R

MINIATURE LAMPS

FIGURE NO. 圖形編號	DRAWING 平面圖樣	LAMP NO. 燈泡編號	DESIGN VOLT. 額定電壓	RATING AMP. 電流	WATT. 功率	FILA- MENT 鎢絲形狀
--------------------	-----------------	------------------	-------------------------	----------------------	-------------	-----------------------

SUB-MINIATURE IN DIA T5.5X15MM (T1 3/4), MIDGET FLANGED BASE 凸邊子彈泡

H-36  BASE: MF6 燈腳		H36-01103	1.1V	0.3A	0.33W	C-2R
		H36-022025	2.2V	0.25A	0.55W	C-2R
		H36-023027	2.3V	0.27A	0.62W	C-2R
		H36-02503	2.5V	0.3A	0.75W	C-2R
		H36-03703	3.7V	0.3A	1.11W	C-2R
		H36-06005	6V	0.05A	0.3W	C-2R
		H36-12005	12V	0.05A	0.6W	C-2V
		H36-24005	24V	0.05A	1.2W	C-2F
		H36-28004	28V	0.04A	1.12W	C-2F

SUB-MINIATURE IN DIA T4.7X15MM (T1 3/4), MIDGET SCREW BASE E5 米泡

H-37  BASE: E5 燈腳		H37-01503	1.5V	0.3A	0.45W	C-2R
		H37-022025	2.2V	0.25A	0.55W	C-2R
		H37-0301	3V	0.1A	0.3W	C-2R
		H37-06005	6V	0.05A	0.3W	C-2R
		H37-12005	12V	0.05A	0.6W	C-2V
		H37-14005	14V	0.05A	0.7W	C-2V
		H37-24005	24V	0.05A	1.2W	C-2F
		H37-28005	28V	0.05A	1.4W	C-2F

SUB-MINIATURE LENS-END IN DIA T4.7X15MM (T1 3/4), MIDGET SCREW BASE E5 米晶泡

H-38  BASE: E5 燈腳		H38-01103	1.1V	0.3A	0.33W	C-6
		H38-01202	1.2V	0.2A	0.24W	C-6
		H38-022018	2.2V	0.18A	0.4W	C-6
		H38-022025	2.2V	0.25A	0.55W	C-6
		H38-023027	2.3V	0.27A	0.62W	C-6
		H38-02502	2.5V	0.2A	0.5W	C-6
		H38-02503	2.5V	0.3A	0.75W	C-6
		H38-03703	3.7V	0.3A	1.11W	C-6

SUB-MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓


RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀


SUB-MINIATURE IN DIA T3X8MM (T1), WIRE TERMINAL TYPE

米泡

H-39  BASE: WIRE TERMINAL 燈腳		H39-02501	2.5V	0.1A	0.25W	C-2R
		H39-0301	3V	0.1A	0.3W	C-2R
		H39-06005	6V	0.05A	0.3W	C-2R
		H39-09005	9V	0.05A	0.45W	C-2V
		H39-12005	12V	0.05A	0.6W	C-2V
		H39-14005	14V	0.05A	0.7W	C-2V
		H39-24005	24V	0.05A	1.2W	C-2F

SUB-MINIATURE IN DIA T4X10MM (T1 1/4), WIRE TERMINAL TYPE

米泡

H-40  BASE: WIRE TERMINAL 燈腳		H40-02501	2.5V	0.1A	0.25W	C-2R
		H40-0301	3V	0.1A	0.3W	C-2R
		H40-06005	6V	0.05A	0.3W	C-2R
		H40-09005	9V	0.05A	0.45W	C-2V
		H40-12005	12V	0.05A	0.6W	C-2V
		H40-24005	24V	0.05A	1.2W	C-2F
		H40-28005	28V	0.05A	1.4W	C-2F


SUB-MINIATURE IN DIA T4.7X10MM (T1 1/2), WIRE TERMINAL TYPE

米泡

H-41  BASE: WIRE TERMINAL 燈腳		H41-0301	3V	0.1A	0.3W	C-2R
		H41-06005	6V	0.05A	0.3W	C-2R
		H41-09005	9V	0.05A	0.45W	C-2V
		H41-12005	12V	0.05A	0.6W	C-2V
		H41-24005	2.4V	0.05A	1.2W	C-2F
		H41-28005	28V	0.05A	1.4W	C-2F

SUB-MINIATURE LENS-END IN DIA T4X10MM (T1 1/4), WIRE TERMINAL TYPE

米晶泡

H-42  BASE: WIRE TERMINAL 燈腳		H42-01503	1.5V	0.3A	0.45W	C-2R
		H42-022025	2.2V	0.25A	0.55W	C-2R
		H42-02502	2.5V	0.2A	0.5W	C-2R
		H42-02503	2.5V	0.3A	0.75W	C-6
		H42-03703	3.7V	0.3A	1.11W	C-6

SUB-MINIATURE LENS-END IN DIA T4.7X10MM (T1 1/2), WIRE TERMINAL TYPE

米晶泡

H-43  BASE: WIRE TERMINAL 燈腳		H43-01503	1.5V	0.3A	0.45W	C-2R
		H43-022025	2.2V	0.25A	0.55W	C-2R
		H43-02502	2.5V	0.2A	0.5W	C-2R
		H43-02503	2.5V	0.3A	0.75W	C-6
		H43-03703	3.7V	0.3A	1.11W	C-6

COLOURED AND WIRED LAMPS ARE AVAILABLE ON REQUEST

可提供染顏色及駁電線

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流


WATT.
功率

FILA-
MENT
鎢絲形狀

AXIAL LAMP IN DIA 3X15MM (T1), WIRE TERMINAL TYPE

指揮毛泡

H-44




H44-0301	3V	0.1A	0.3W	C-8
H44-045005	4.5V	0.05A	0.2W	C-8
H44-0601	6V	0.1A	0.6W	C-8
H44-0901	9V	0.1A	0.9W	C-8
H44-1201	12V	0.1A	1.2W	C-8

BASE: WIRE TERMINAL 燈腳

AXIAL LAMP IN DIA 4X15MM (T1 1/4), WIRE TERMINAL TYPE

指揮毛泡

H-45




H45-0301	3V	0.1A	0.3W	C-8
H45-0601	6V	0.1A	0.6W	C-8
H45-0701	7V	0.1A	0.7W	C-8
H45-09005	9V	0.05A	0.45W	C-8
H45-0901	9V	0.1A	0.9W	C-8
H45-10005	10V	0.05A	0.5W	C-8
H45-12005	12V	0.05A	0.6W	C-8
H45-14005	14V	0.05A	0.7W	C-8

BASE: WIRE TERMINAL 燈腳

AXIAL LAMP IN DIA 4X19MM (T1 1/4), WIRE TERMINAL TYPE

指揮毛泡

H-46

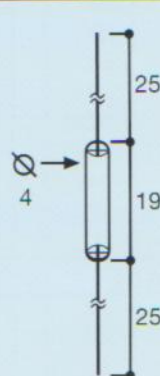


H46-0601	6V	0.1A	0.6W	C-8
H46-0701	7V	0.1A	0.7W	C-8
H46-0801	8V	0.1A	0.8W	C-8
H46-09005	9V	0.05A	0.45W	C-8
H46-0901	9V	0.1A	0.9W	C-8
H46-10005	10V	0.05A	0.5W	C-8
H46-12005	12V	0.05A	0.6W	C-8
H46-14005	14V	0.05A	0.7W	C-8

BASE: WIRE TERMINAL 燈腳

AXIAL LAMP IN DIA 6.5X30MM, WIRE TERMINAL TYPE

指揮毛泡







H-47





H47-0601	6V	0.1A	0.6W	C-8
H47-0701	7V	0.1A	0.7W	C-8
H47-0801	8V	0.1A	0.8W	C-8
H47-09005	9V	0.05A	0.45W	C-8
H47-0901	9V	0.1A	0.9W	C-8
H47-10005	10V	0.05A	0.5W	C-8
H47-12005	12V	0.05A	0.6W	C-8
H47-14005	14V	0.05A	0.7W	C-8

BASE: WIRE TERMINAL 燈腳

MINIATURE LAMPS


FIGURE NO. 圖形編號	DRAWING 平面圖樣	LAMP NO. 燈泡編號	DESIGN VOLT. 額定電壓	RATING AMP. 電流	WATT. 功率	FILA- MENT 鎢絲形狀
FESTOON LAMP IN DIA 5.5X28MM, CAP S5.5 BASE 指揮泡						
H-49 		H49-06017	6V	0.17A	1W	C-8
		H49-06035	6V	0.35A	2W	C-8
		H49-0605	6V	0.5A	3W	C-8
		H49-09022	9V	0.22A	2W	C-8
		H49-0903	9V	0.3A	3W	C-8
		H49-12025	12V	0.25A	3W	C-8
FESTOON LAMP IN DIA 6.5X32MM (FUSE TYPE), FUSE CAP 6.3 BASE 平頭指揮泡						
H-50 		H50-06017	6V	0.17A	1W	C-8
		H50-06035	6V	0.35A	2W	C-8
		H50-0605	6V	0.5A	3W	C-8
		H50-09022	9V	0.22A	2W	C-8
		H50-0903	9V	0.3A	3W	C-8
		H50-12025	12V	0.25A	3W	C-8
FESTOON LAMP IN DIA 6.5X36MM, CAP S6 BASE 指揮泡						
H-51 		H51-06017	6V	0.17A	1W	C-8
		H51-06035	6V	0.35A	2W	C-8
		H51-0605	6V	0.5A	3W	C-8
		H51-09022	9V	0.22A	2W	C-8
		H51-0903	9V	0.3A	3W	C-8
		H51-12025	12V	0.25A	3W	C-8
FESTOON LAMP IN DIA 8X36MM, CAP S7 BASE 指揮泡						
H-52 		H52-06035	6V	0.35A	2W	C-8
		H52-0605	6V	0.5A	3W	C-8
		H52-09033	9V	0.33A	3W	C-8
		H52-12025	12V	0.25A	3W	C-8
		H52-12042	12V	0.42A	5W	C-8
		H52-240125	24V	0.125A	3W	C-8
FESTOON LAMP IN DIA 11X39MM, CAP S8.5 BASE 指揮泡						
H-53 		H53-06035	6V	0.35A	2W	C-8
		H53-06083	6V	0.83A	5W	C-8
		H53-0903	9V	0.3A	3W	C-8
		H53-12025	12V	0.25A	3W	C-8
		H53-12042	12V	0.42A	5W	C-8
		H53-12083	12V	0.83A	10W	C-8
		H53-240125	24V	0.125A	3W	C-8
		H53-24021	24V	0.21A	5W	C-8
		H53-24042	24V	0.42A	10W	C-8
FESTOON LAMP IN DIA 11X42MM, CAP S8.5 BASE 指揮泡						
H-54 		H54-06035	6V	0.35A	2W	C-8
		H54-06083	6V	0.83A	5W	C-8
		H54-0903	9V	0.3A	3W	C-8
		H54-12025	12V	0.25A	3W	C-8
		H54-12042	12V	0.42A	5W	C-8
		H54-12083	12V	0.83A	10W	C-8
		H54-240125	24V	0.125A	3W	C-8
		H54-24021	24V	0.21A	5W	C-8
		H54-24042	24V	0.42A	10W	C-8

NEON LAMP TYPE 氖膽類

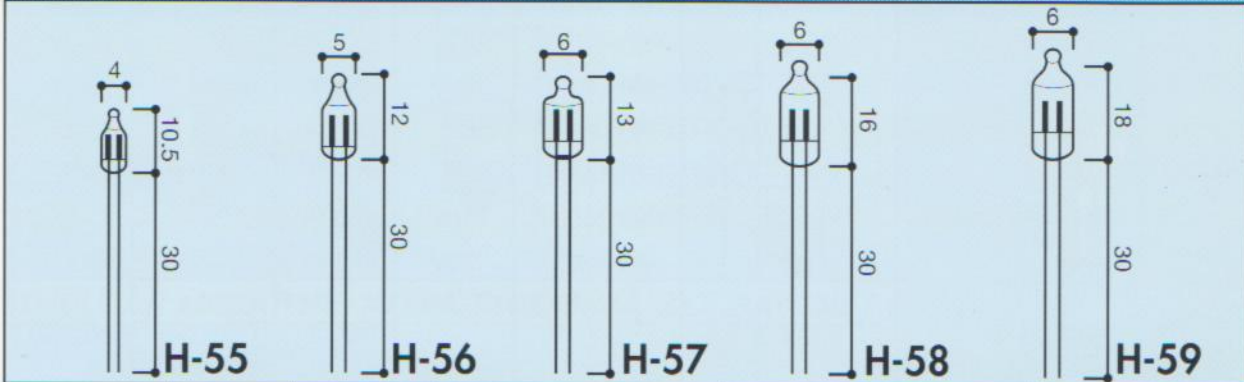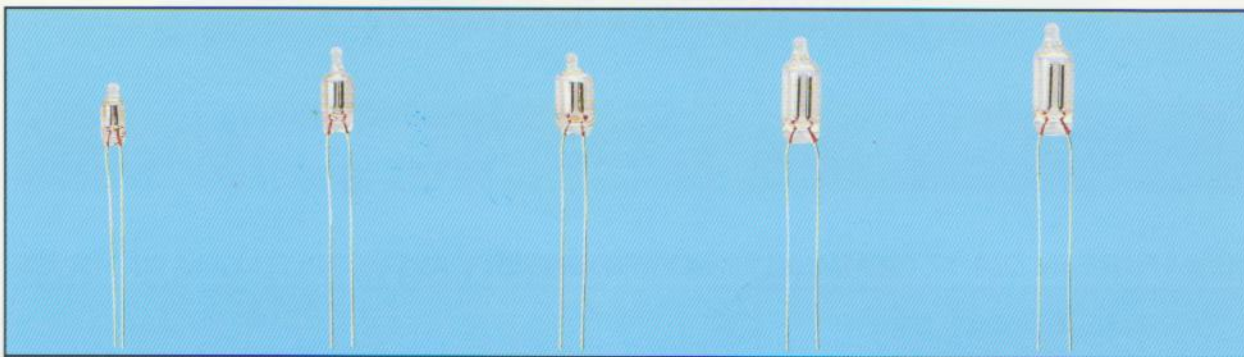

DIMENSION 尺寸	燈編號 LAMP TYPE	電流 CURRENT MA	MAXIMUM STARTING AC	起光電壓 VOLTAGE DC	串聯電阻 SERIES RESISTOR VALUE 110/130V 220/250V		BRIGHTNESS 亮度
4X10MM FIG. H-55	410/30SB	0.6	65	90	180K 1/4W	300K 1/4W	STANDARD 普通光
	410/30HB	0.9	95	135	68K 1/4W	180K 1/4W	HIGH 高光
	410/30GB	0.9	95	135	68K 1/4W	180K 1/4W	GREEN 綠光
5X12MM FIG. H-56	512/30SB	0.6	65	90	150K 1/4W	270K 1/4W	STANDARD 普通光
	512/30HB	1.2	95	135	47K 1/4W	150K 1/4W	HIGH 高光
	512/30GB	1.2	80	120	47K 1/4W	150K 1/4W	GREEN 綠光
6X13MM FIG. H-57	613/30SB	0.6	65	90	150K 1/4W	270K 1/4W	STANDARD 普通光
	613/30HB	1.2	95	135	47K 1/4W	150K 1/4W	HIGH 高光
	613/30GB	1.2	95	135	47K 1/4W	150K 1/4W	GREEN 綠光
6X16MM FIG. H-58	616/30SB	0.8	65	90	100K 1/4W	220K 1/4W	STANDARD 普通光
	616/30HB	1.8	95	135	33K 1/4W	100K 1/4W	HIGH 高光
	616/30GB	1.8	95	135	33K 1/4W	100K 1/4W	GREEN 綠光
6X18MM FIG. H-59	618/30SB	0.8	65	90	82/100K 1/4W	180K 1/4W	STANDARD 普通光
	618/30HB	1.8	95	135	22/33K 1/4W	82K 1/4W	HIGH 高光
	618/30GB	1.8	80	120	22/33K 1/4W	82K 1/4W	GREEN 綠光

NEON LAMP ASSEMBLY 氖膽配接電阻

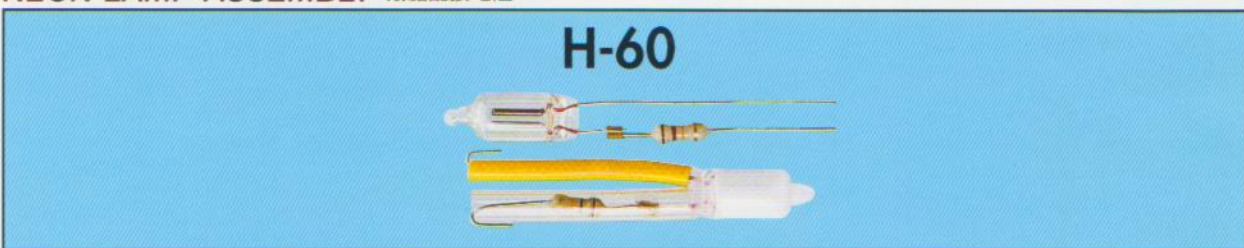

NOTE:

- * NEON LAMP ASSEMBLY ONLY AVAILABLE AS PER CUSTOMER'S SPECIFICATION.
- * CRIMPED METHOD IS AVAILABLE FOR THE NEON LAMP WITH ATTACHED RESISTORS.

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀


MINIATURE IN DIA 17X30MM, MIN. SCREW BASE

大元泡

H-61



BASE: E10 燈腳



H61-12025	12V	0.25A	3W	C-2V
H61-14015	14V	0.15A	2.1W	C-2V
H61-240125	24V	0.125A	3W	C-2V
H61-28017	28V	0.17A	4.8W	C-2F
H61-38005	38V	0.05A	1.9W	C-2F
H61-60004	60V	0.04A	2.4W	C-2F
H61-110002	110V	0.02A	2.2W	C-2F
H61-130002	130V	0.02A	2.6W	CC-3


MINIATURE IN DIA 17X30MM, MIN. BAYONET BASE

大元泡

H-62



BASE: BA9S 燈腳



H62-12025	12V	0.25A	2W	C-2V
H62-14015	14V	0.15A	2.1W	C-2V
H62-240125	24V	0.125A	3W	C-2V
H62-28017	28V	0.17A	4.8W	C-2F
H62-38005	38V	0.05A	1.9W	C-2F
H62-60004	60V	0.04A	2.4W	C-2F
H62-110002	110V	0.02A	2.2W	C-2F
H62-130002	130V	0.02A	2.6W	CC-3


MINIATURE IN DIA 19X50MM, E14 SCREW BASE

木瓜泡

H-63



BASE: E14 燈腳

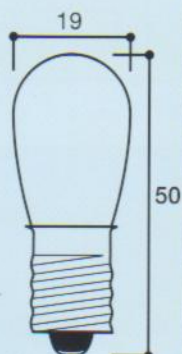

H63-12025	12V	0.25A	3W	C-2V
H63-14015	14V	0.15A	2.1W	C-2V
H63-240125	24V	0.125A	3W	C-2V
H63-28017	28V	0.17A	4.8W	C-2F
H63-38005	38V	0.05A	1.9W	C-2F
H63-60004	60V	0.04A	2.4W	C-2F
H63-110002	110V	0.02A	2.2W	C-2F
H63-130002	130V	0.02A	2.6W	CC-3

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流
WATT.
功率

FILA-
MENT
鎢絲形狀


TUBULAR MINIATURE IN DIA T16X35MM, E14 SCREW BASE

長管泡

H-64



BASE: E14 燈腳



H64-12025	12V	0.25A	3W	C-2V
H64-14015	14V	0.15A	2.1W	C-2V
H64-240125	24V	0.125A	3W	C-2V
H64-28017	28V	0.17A	4.8W	C-2F
H64-60004	60V	0.04A	2.4W	C-2F
H64-110002	110V	0.02A	2.2W	C-2F
H64-130002	130V	0.02A	2.6W	CC-3

TUBULAR MINIATURE IN DIA T16X45MM, S.C. BAYONET BASE

長管泡

H-65



BASE: BA15S 燈腳



H65-12025	12V	0.25A	3W	C-2V
H65-14015	14V	0.15A	2.1W	C-2V
H65-240125	24V	0.125A	3W	C-2V
H65-28017	28V	0.17A	4.8W	C-2F
H65-60004	60V	0.04A	2.4W	C-2F
H65-110002	110V	0.02A	2.2W	C-2F
H65-130002	130V	0.02A	0.26W	CC-3


TUBULAR MINIATURE IN DIA T16X54MM, D.C. BAYONET BASE

長管泡

H-66



BASE: BA15D 燈腳



H66-12025	12V	0.25A	3W	C-2V
H66-14015	14V	0.15A	2.1W	C-2V
H66-240125	24V	0.125A	3W	C-2V
H66-28017	28V	0.17A	4.8W	C-2F
H66-60004	60V	0.04A	2.4W	C-2F
H66-110002	110V	0.02A	2.2W	C-2F
H66-130002	130V	0.02A	0.26W	CC-3

MINIATURE IN DIA 17X55MM, MIN. SCREW BASE

辣椒泡

H-67



BASE: E10 燈腳



H67-12025	12V	0.25A	2W	C-2V
H67-14015	14V	0.15A	2.1W	C-2V
H67-240125	24V	0.125A	3W	C-2V
H67-28017	28V	0.17A	4.8W	C-2F
H67-60004	60V	0.04A	2.4W	C-2F
H67-110002	110V	0.02A	2.2W	C-2F

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀


MINIATURE IN DIA 17X49MM, MIN. SCREW BASE

C6 泡

H-68



BASE: E10 燈腳



H68-12025	12V	0.25A	2W	C-2V
H68-14015	14V	0.15A	2.1W	C-2V
H68-240125	24V	0.125A	3W	C-2V
H68-28017	28V	0.17A	4.8W	C-2F
H68-60004	60V	0.04A	2.4W	C-2F
H68-110002	110V	0.02A	2.2W	C-2F


MINIATURE IN DIA 11X65MM, MIN. SCREW BASE

臘燭泡

H-69



BASE: E10 燈腳

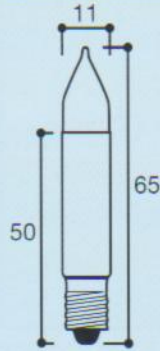

H69-12025	12V	0.25A	3W	C-2V
H69-14015	14V	0.15A	2.1W	C-2V
H69-240125	24V	0.125A	3W	C-2V
H69-28017	28V	0.17A	4.8W	C-2F
H69-60004	60V	0.04A	2.4W	C-2F
H69-110002	110V	0.02A	2.2W	C-2F


MINIATURE LAMP IN DIA C16.5X50MM, MIN. SCREW BASE

C6 16.5mm 泡

H-70



BASE: E10 燈腳



H70-014018	1.4V	0.18A	0.25W	C-2R
H70-06015	6V	0.15A	0.9W	C-2R
H70-12025	12V	0.25A	3W	C-2V
H70-14021	14V	0.21A	3W	C-2V
H70-34009	34V	0.09A	3W	C-2F
H70-48006	48V	0.06A	3W	C-2F
H70-550055	55V	0.055A	3W	C-2F


MINIATURE LAMP IN DIA C13.5X45MM, MIN. SCREW BASE

清光中焦泡

H-71



BASE: E10 燈腳



H71-014018	1.4V	0.18A	0.25W	C-2R
H71-06015	6V	0.15A	0.9W	C-2R
H71-12025	12V	0.25A	3W	C-2V
H71-14021	14V	0.21A	3W	C-2V
H71-34009	34V	0.09A	3W	C-2F
H71-48006	48V	0.06A	3W	C-2F
H71-550055	55V	0.055A	3W	C-2F

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流
WATT.
功率

FILA-
MENT
鎢絲形狀


MINIATURE LAMP IN DIA 25X45MM, MIN. SCREW BASE

喇叭泡

H-72



BASE: E10 燈腳



H72-06015	6V	0.15A	0.9W	C-2R
H72-12025	12V	0.25A	3W	C-2V
H72-14021	14V	0.21A	3W	C-2V
H72-34009	34V	0.09A	3W	C-2F
H72-550055	55V	0.055A	3W	C-2F


MINIATURE IN DIA 25X45MM, MIN. BAYONET BASE

喇叭泡

H-73



BASE: BA9S 燈腳



H73-0301	3V	0.1A	0.3W	C-2R
H73-0601	6V	0.1A	0.6W	C-2R
H73-12025	12V	0.25A	3W	C-2V
H73-48006	48V	0.06A	3W	C-2F
H73-550055	55V	0.055A	3W	C-2F


MINIATURE LAMP IN DIA G30X45MM, EP10 SCREW BASE

特大元泡

H-74



BASE: EP10 燈腳



H74-06015	6V	0.15A	0.9W	C-2R
H74-12025	12V	0.25A	3W	C-2V
H74-14021	14V	0.21A	3W	C-2V
H74-34009	34V	0.09A	3W	C-2F
H74-48006	48V	0.06A	3W	C-2F
H74-550055	55V	0.055A	3W	C-2F


MINIATURE LAMP IN DIA G30X45MM, MIN. BAYONET BASE

特大元泡

H-75



BASE: BA9S 燈腳



H75-06015	6V	0.15A	0.9W	C-2R
H75-12025	12V	0.25A	3W	C-2V
H75-14021	14V	0.21A	3W	C-2V
H75-34009	34V	0.09A	3W	C-2F
H75-48006	48V	0.06A	3W	C-2F
H75-550055	55V	0.055A	3W	C-2F

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀


GRANULATED FLASH LIGHT, B11X28MM (B3 1/2) MIN. SCREW BASE

花點紋原子泡

H-76



BASE: E10 燈腳



H76-023027	2.3V	0.27A	0.62W	C-2R
H76-02405	2.4V	0.5A	1.2W	C-2R
H76-02503	2.5V	0.3A	0.75W	C-2R
H76-03605	3.6V	0.5A	1.8W	C-2R
H76-03803	3.8V	0.3A	1.14W	C-2R
H76-04805	4.8V	0.5A	2.4W	C-2R
H76-0605	6V	0.5A	3W	C-2R
H76-07205	7.2V	0.5A	3.6W	C-2R


GRANULATED IN DIA G15X28MM, MIN. SCREW BASE

波蘿紋中元泡

H-77



BASE: E10 燈腳



H77-01501	1.5V	0.1A	0.15W	C-2R
H77-02501	2.5V	0.1A	0.25W	C-2R
H77-0301	3V	0.1A	0.3W	C-2R
H77-03501	3.5V	0.1A	0.35W	C-2R
H77-04501	4.5V	0.1A	0.45W	C-2R
H77-0601	6V	0.1A	0.6W	C-2R
H77-1201	12V	0.1A	1.2W	C-2V
H77-2401	24V	0.1A	2.4W	C-2F


MINIATURE LAMP IN DIA G7X15MM, MIDGET SCREW BASE

特小元泡

H-78



BASE: E5 燈腳



H78-01501	1.5V	0.1A	0.15W	C-2R
H78-02501	2.5V	0.1A	0.25W	C-2R
H78-0301	3V	0.1A	0.3W	C-2R
H78-03501	3.5V	0.1A	0.35W	C-2R
H78-04501	4.5V	0.1A	0.45W	C-2R
H78-0601	6V	0.1A	0.6W	C-2R
H78-1201	12V	0.1A	1.2W	C-2V
H78-2401	24V	0.1A	2.4W	C-2F

MINIATURE LAMPS

FIGURE NO.
圖形編號

DRAWING
平面圖樣

LAMP NO.
燈泡編號

DESIGN
VOLT.
額定電壓

RATING
AMP.
電流

WATT.
功率

FILA-
MENT
鎢絲形狀

SUB-MINIATURE IN DIA T4X13MM (T1 1/4), SUB-MIDGET FLANGED BASE 凸邊小子彈泡

H-79



BASE: MS4 燈腳



H79-01103	1.1V	0.3A	0.33W	C-2R
H79-022025	2.2V	0.25A	0.55W	C-2R
H79-02503	2.5V	0.3A	0.75W	C-2R
H79-03703	3.7V	0.3A	1.11W	C-2R
H79-06005	6V	0.05A	0.3W	C-2R
H79-12005	12V	0.05A	0.6W	C-2V

SUB-MINIATURE IN DIA T4.7X15MM (T1 1/2), MIDGET GROOVED BASE 凹坑子彈泡

H-80



BASE: MG6 燈腳




H80-01103	1.1V	0.3A	0.33W	C-2R
H80-022025	2.2V	0.25A	0.55W	C-2R
H80-02503	2.5V	0.3A	0.75W	C-2R
H80-03703	3.7V	0.3A	1.11W	C-2R
H80-06005	6V	0.05A	0.3W	C-2R
H80-12005	12V	0.05A	0.6W	C-2V
H80-24005	24V	0.05A	1.2W	C-2F
H80-28004	28V	0.04A	1.4W	C-2F

SUB-MINIATURE IN DIA T3X9.5MM (T1), BI-PIN BASE 膠套針腳米泡

H-81



BASE: BI-PIN 燈腳




H81-01103	1.1V	0.3A	0.33W	C-2R
H81-022025	2.2V	0.25A	0.55W	C-2R
H81-02503	2.5V	0.3A	0.75W	C-2R
H81-03703	3.7V	0.3A	1.11W	C-2R
H81-06005	6V	0.05A	0.3W	C-2R
H81-12005	12V	0.05A	0.6W	C-2V
H81-24005	24V	0.05A	1.2W	C-2F
H81-28004	28V	0.04A	1.4W	C-2F

SUB-MINIATURE IN DIA T4X15MM (T1 1/4), BI-PIN BASE 膠套針腳米泡

H-82



BASE: BI-PIN 燈腳




H82-01103	1.1V	0.3A	0.33W	C-2R
H82-022025	2.2V	0.25A	0.55W	C-2R
H82-02503	2.5V	0.3A	0.75W	C-2R
H82-03703	3.7V	0.3A	1.11W	C-2R
H82-06005	6V	0.05A	0.3W	C-2R
H82-12005	12V	0.05A	0.6W	C-2V
H82-24005	24V	0.05A	1.2W	C-2F
H82-28004	28V	0.04A	1.4W	C-2F

SUB-MINIATURE IN DIA T4.7X15MM (T1 1/2), BI-PIN BASE 膠套針腳米泡

H-83



BASE: BI-PIN 燈腳




H83-01103	1.1V	0.3A	0.33W	C-2R
H83-022025	2.2V	0.25A	0.55W	C-2R
H83-02503	2.5V	0.3A	0.75W	C-2R
H83-03703	3.7V	0.3A	1.11W	C-2R
H83-06005	6V	0.05A	0.3W	C-2R
H83-12005	12V	0.05A	0.6W	C-2V
H83-24005	24V	0.05A	1.2W	C-2F
H83-28004	28V	0.04A	1.4W	C-2F

MINIATURE LAMPS

FIGURE NO. 圖形編號	DRAWING 平面圖樣	LAMP NO. 燈泡編號	DESIGN VOLT. 額定電壓	RATING		FILA- MENT 鎢絲形狀
				AMP. 電流	WATT. 功率	


WEDGE BASE LAMP IN DIA 5X20MM (T1 3/4)

T5 扁腳泡

H-84  BASE: WEDGE 燈腳		H84-02502	2.5V	0.2A	0.5W	C-2R
		H84-05012	5V	0.12A	0.6W	C-2R
		H84-0602	6V	0.2A	1.2W	C-2R
		H84-063004	6.3V	0.04A	0.2W	C-2V
		H84-14004	14V	0.04A	0.5W	C-2F
		H84-14008	14V	0.08A	1.1W	C-2F
		H84-14015	14V	0.15A	2.1W	C-2V
		H84-28004	28V	0.04A	1.4W	C-2F


WEDGE LAMP IN DIA 10X25MM (T3 1/4)

T10 扁腳泡

H-85  BASE: WEDGE 燈腳		H85-025028	2.5V	0.28A	0.7W	C-2R
		H85-063015	6.3V	0.15A	0.9W	C-2R
		H85-063025	6.3V	0.25A	1.5W	C-2R
		H85-07043	7V	0.43A	3W	C-2R
		H85-14008	14V	0.08A	1.1W	C-2F
		H85-14024	14V	0.24A	3.3W	C-2F
		H85-14035	14V	0.35A	5W	C-2V
		H85-28004	28V	0.04A	1.4W	C-2F

WEDGE BASE LAMP IN DIA 15X35MM (T5)

T15 扁腳泡

H-86  BASE: WEDGE 燈腳		H86-0409	4V	0.9A	3.6W	C-2R
		H86-06062	6V	0.62A	3.7W	C-2R
		H86-0609	6V	0.9A	5.4W	C-2R
		H86-12075	12V	0.75A	9W	C-2R
		H86-1210	12V	1.0A	12W	C-2R
		H86-13069	13V	0.69A	9W	C-2R


GLASS TUBE FUSE

玻璃保險管

H-520

DIA 5X20MM (FAST ACTING) 快斷

DIMENSION
尺寸



125V/250V

0.2A-0.4A

0.5A-0.9A


1A-10A

11A-20A

H-520PT

DIA 5X20MM (FAST ACTING) 快斷


DIMENSION
尺寸



H-630

DIA 6.35X30MM (FAST ACTING) 快斷

DIMENSION
尺寸



125V/250V

0.2A-0.4A

0.5A-0.9A


1A-10A

11A-20A

H-630PT

DIA 6.35X30MM (FAST ACTING) 快斷


DIMENSION
尺寸



H-632

DIA 6.35X32MM (FAST ACTING) 快斷

DIMENSION
尺寸



125V/250V

0.2A-0.4A

0.5A-0.9A


1A-10A

11A-20A

H-632PT

DIA 6.35X32MM (FAST ACTING) 快斷

DIMENSION
尺寸




電流時間走勢曲線圖

TIME CURRENT CHARACTERISTICS

TEST SPECIFICATION 測試規格

LOAD 負載電流	OPENING TIME 電路開通時間
110%	4 Hrs Min.
210%	10 Sec Max. 0.2A-7A
275%	2 Sec Max. 0.2A-7A
210%	30 Sec Max. 8A-20A
275%	5 sec Max. 8A-20A


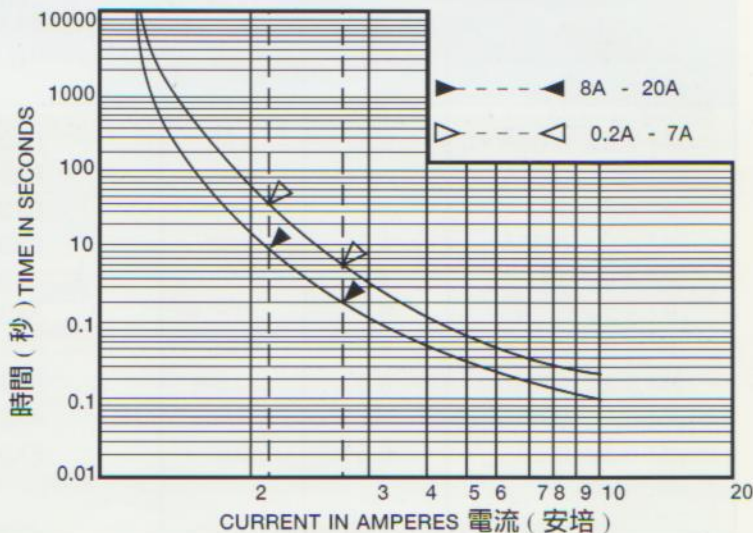


Low Voltage Halogen lamps (JC TYPE)


BASE: G4, G6.35, GY6.35

JC 類石英燈



Code 編號	Volts (V) 電壓	Watts (W) 功率	Dimension Dia.x L (mm x mm) 尺寸	Life Hours 平均壽命
Colour Temperature: 2800K 色溫				
JC 6V 5W	6	5	8X30	2000
JC 6V 10W	6	10	8X30	
JC 6V 15W	6	15	8X30	
JC 6V 20W	6	20	8X30	
JC 6V 30W	6	30	8X30	
JC 12V 3W	12	3	8X30	
JC 12V 5W	12	5	8X30	
JC 12V 10W	12	10	8X30	
JC 12V 20W	12	20	8X30	
JC 12V 30W	12	30	8X30	
JC 24V 10W	24	10	8X30	2000
JC 24V 20W	24	20	8X30	
JC 6V 35W	6	35	10X44	
JC 6V 50W	6	50	10X44	
JC 12V 35W	12	35	10X44	
JC 12V 50W	12	50	10X44	
JC 12V 75W	12	75	10X44	
JC 24V 35W	24	35	10X44	
JC 24V 50W	24	50	10X44	
JC 24V 75W	24	75	10X44	
JC 12V 100W	12	100	11.5X44	2000
JC 24V 100W	24	100	11.5X44	1000
JC 24V 150W	24	150	13.5X44	50
JC 24V 250W	24	250	15X58	50

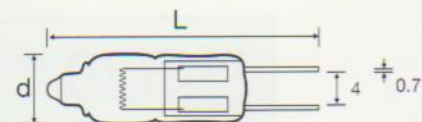

G4

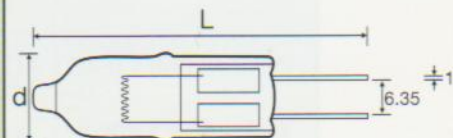

G6.35

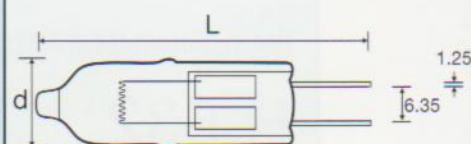



GY6.35

Miniature Halogen Lamps (JM TYPE)

BASE: P13.5S, E10, BA9S

JM 類石英燈

Code 編號	Volts (V) 電壓	AMP. (A) 電流	Dimension Dia.x L (mm x mm) 尺寸	Life Hours 平均壽命
JM 2.8V 0.85A	2.8	0.85	8X31	10
JM 4V 0.85A	4	0.85	8X31	25
JM 4V 1A	4	1	8X31	50
JM 4.2V 0.85A	4.2	0.85	8X31	25
JM 4.8V 1A	4.8	1	8X31	100
JM 5.2V 0.5A	5.2	0.5	8X31	15
JM 5.2 0.85A	5.2	0.85	8X31	25
JM 5.5V 0.5A	5.5	0.5	8X31	40
JM 6V 0.4A	6	0.4	8X31	100
JM 6.5V 0.7A	6.5	0.7	8X31	25

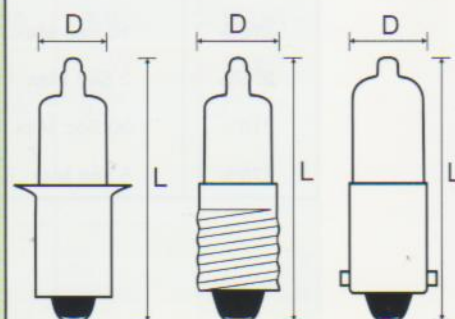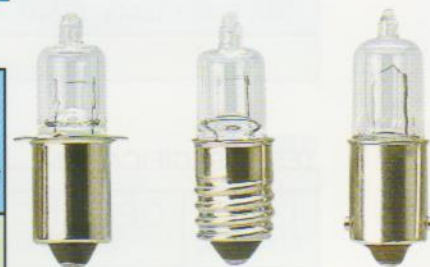

P13.5S

E-10


BA9S

FUSE HOLDER

保險管套



H-520FH

FOR DIA 5MM FUSE



H-632FH

FOR DIA 6.35MM FUSE

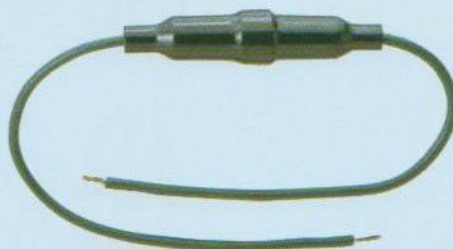


FUSE CLIPS

保險管夾



H-520FC

FOR DIA 5MM FUSE



H-632FC

FOR DIA 6.35MM FUSE



LAMPS E12, E14, E17, BA15S, BA15D

夜燈類

120V 7W
120V 10W
120V 15W

240V 7W
240V 10W
240V 15W

