HF32FA

SUBMINIATURE INTERMEDIATE POWER RELAY



File No.:E134517



File No.:40006182

Electrical endurance



File No.:CQC09002028689





1 x 10⁵OPS

Features

- 5A switching capability
- Creepage/clearance distance>8mm
- 5kV dielectric strength (between coil and contacts)
- 1 Form A meets VDE 0700, 0631 reinforce insulation
- 1 Form C meets VDE 0631 reinforce insulation
- UL insulation system: Class F
- Product in accordance to IEC 60335-1 available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (17.6 x 10.1 x 12.3) mm

CONTACT DATA			
Contact arrangement	1A, 1C		
Contact resistance	70mΩ max.(at 1A 6VDC)		
Contact material		AgNi	
Contact rating (Res. Load)	1A	1C	
	Standard /Sensitive	Standard	
	5A 250VAC	3A 250VAC	
	5A 30VDC	3A 30VDC	
Max. switching voltage	250V	AC / 30VDC	
Max. switching current		5A	
Max. switching power	125	50VA / 150W	
Mechanical endurance		1 x 10 ⁶ ops	

CHARACTERISTICS				
Insulation resistance		sistance	1000MΩ (at 500VDC	
Dielectric	Between coil & contacts		5000VAC 1min	
strength	Between open contacts		1000VAC 1min	
Operate time (at nomi. volt.)		(at nomi. volt.)	8ms max.	
Release time (at nomi. volt.)		(at nomi. volt.)	4ms max	
Humidity			5% to 85% RI	
Ambient temperature		perature	-40°C to 85°C	
Shock resistance		Functional	98m/s ²	
		Destructive	980m/s ²	
Vibration resistance		istance	10Hz to 55 Hz 1.65mm DA	
Termination			PCB	
Unit weight			Approx.4.6	
Construction			Plastic sealed, Flux proofed	

Notes: 1) The vibration resistance should be 0.6mm,10Hz to 55Hz for NC contact. Along with the length direction.

- 2) The data shown above are initial values.
 3) Please find coil temperature curve in the characteristic curves below.

COIL	
Coil power	Sensitive: Approx. 200mW;
	Standard: Approx. 450mW

COIL DATA at 23°C Standard type

Standard type				
Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.15	3.9	20 x (1±10%)
5	3.75	0.25	6.5	55 x (1±10%)
6	4.50	0.30	7.8	80 x (1±10%)
9	6.75	0.45	11.7	180 x (1±10%)
12	9.00	0.60	15.6	320 x (1±10%)
18	13.5	0.90	23.4	720 x (1±10%)
24	18.0	1.20	31.2	1280 x (1±10%)
48	36.0	2.40	62.4	5120 x (1±10%)

Sensitive type (Only for 1 Form A)


Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω	
3	2.25	0.15	5.1	45 x (1±10%)	
5	3.75	0.25	8.5	125 x (1±10%)	
6	4.50	0.30	10.2	180 x (1±10%)	
9	6.75	0.45	15.3	400 x (1±10%)	
12	9.00	0.60	20.4	720 x (1±10%)	
18	13.5	0.90	30.6	1600 x (1±10%)	
24	18.0	1.20	40.8	2800 x (1±10%)	

SAFETY APPROVAL RATINGS				
UL/CUL	1 Form A	5A 250VAC at 85°C		
		5A 30VDC at 85°C		
		1/8HP 125VAC/250VAC at 85°C		
		TV-2 at 85°C		
		C300 at 85°C		
	1 Form C	3A 250VAC at 85°C		
		3A 30VDC at 85°C		
		5A 250VAC at 85°C		
VDE		2A 250VAC cosø=0.5 at 85°C		
		1 Form A, Sensitive: 3A 400VAC at 85°C		

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



SO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

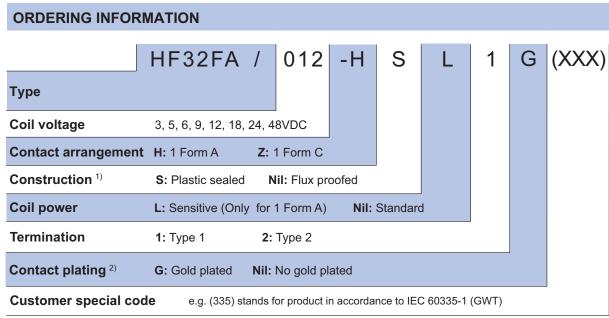


Notes: 1) Under the ambience with dangerous gas like H₂S, SO₂ or NO₂, plastic sealed type is recommended; Please test the relay in real applications. If the ambience allows, flux proofed type is preferentially recommended.

If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

2) For gold plated type, the min. switching current and min. switching voltage is 10mA 5VDC.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

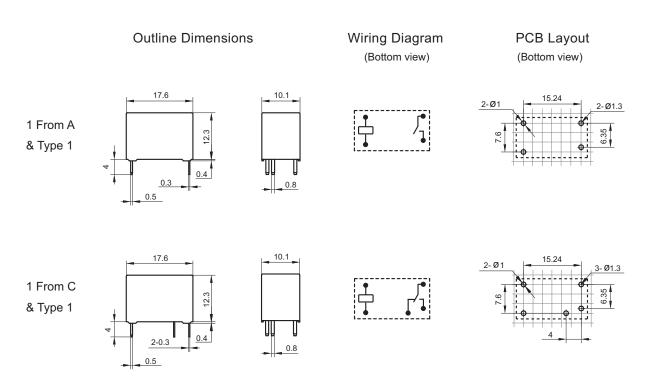

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

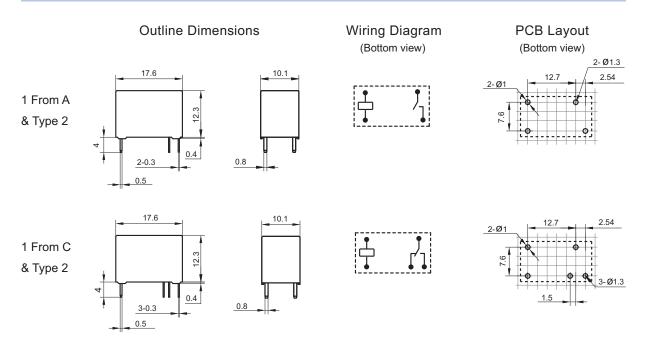

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.

- 2) The tolerance without indicating for PCB layout is always ±0.1mm.
- 3) The width of the gridding is 2.54mm.

CHARACTERISTIC CURVES

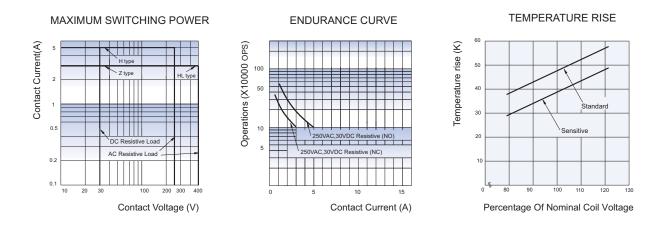

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.