





■ Features

- · Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- IP67 / IP65 design for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming; Timer dimming
- Typical lifetime>62000 hours
- 7 years warranty


Applications

- · LED street lighting
- · LED fishing lamp
- · LED harbor lighting
- · LED building architectural lighting
- · LED greenhouse lighting
- LED bay lighting

Description

HLG-120H-C series is a 150W AC/DC LED driver featuring the constant current mode and high voltage output. HLG-120H-C operates from $90\sim305$ VAC and offers models with different rated current ranging between 350mA and 1400mA. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40° C $\sim +90^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-120H-C is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding

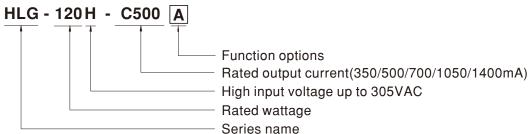

| Type | IP Level | Function | Note |
|------|----------|---|------------|
| Α | IP65 | lo adjustable through built-in potentiometer. | In Stock |
| В | IP67 | 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance) | In Stock |
| AB | IP65 | Io adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance) | |
| D | IP67 | Timer dimming function, contact MEAN WELL for details(safety pending). | By request |




SPECIFICATION

| MODEL | | HLG-120H-C350 | HLG-120H-C500 | HLG-120H-C700 | HLG-120H-C1050 | HLG-120H-C1400 | |
|-------------|---|---|-----------------------------|-------------------------------|---------------------------------------|---------------------------|--|
| | RATED CURRENT | 350mA | 500mA | 700mA | 1050mA | 1400mA | |
| ОИТРИТ | RATED POWER | 150.5W | 150W | 150.5W | 155.4W | 151.2W | |
| | CONSTANT CURRENT REGION Note.2 | 215 ~ 430V | 150V ~ 300V | 107V ~ 215V | 74V ~ 148V | 54V ~ 108V | |
| | | Adjustable for A/AB-Type only (via built-in potentiometer) | | | | | |
| | CURRENT ADJ. RANGE | 175 ~ 350mA | 250 ~ 500mA | 350 ~ 700mA | 525 ~ 1050mA | 700 ~ 1400mA | |
| | CURRENT RIPPLE | 8.0% max. @rated current | | | | | |
| | CURRENT TOLERANCE | ±5% | | | | | |
| | SET UP TIME Note.4 | 4 1000ms / 115VAC 500ms / 230VAC | | | | | |
| | VOLTAGE RANGE Note.3 | 90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section) | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | |
| | POWER FACTOR (Typ.) | PF≥0.98/115VAC, PF≥0.96/230VAC, PF≥0.93/277VAC @full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) | | | | | |
| INPUT | TOTAL HARMONIC DISTORTION | THD< 20% (@ load≥50% /115VAC, 230VAC; @ load≥75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION (THD)" section) | | | | | |
| | EFFICIENCY (Typ.) | 94% | 94% | 94% | 94% | 93.5% | |
| | AC CURRENT (Typ.) | 1.6A / 115VAC 0.8 | | / 277VAC | | 1 | |
| | INRUSH CURRENT(Typ.) | | 600 µs measured at 50% lps | eak) at 230VAC; Per NEMA | 410 | | |
| H | MAX. No. of PSUs on 16A CIRCUIT BREAKER | 4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC | | | | | |
| | LEAKAGE CURRENT | <0.75mA/277VAC | | | | | |
| | SHORT CIRCUIT | Constant current limiting | , recovers automatically at | ter fault condition is remo | ved | | |
| PROTECTION | | 475 ~ 495V | 335 ~ 355V | 240 ~ 260V | 165 ~ 175V | 120 ~ 130V | |
| PROTECTION | OVER VOLTAGE | Shut down o/p voltage wi | th auto-recovery or re-pov | ver on to recovery | - | | |
| | OVER TEMPERATURE | Shut down o/p voltage, recovers automatically after temperature goes down | | | | | |
| | WORKING TEMP. | Tcase=-40 ~ +90°C (Plea | se refer to "OUTPUT LOA | D vs TEMPERATURE" se | ction) | | |
| | MAX. CASE TEMP. | Tcase=+90°C | | | | | |
| | WORKING HUMIDITY | 10 ~ 95% RH non-condensing | | | | | |
| ENVIRONMENT | STORAGE TEMP., HUMIDITY | -40 ~ +80°C, 10 ~ 95% RH | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0~50°C) | | | | | |
| | VIBRATION | 10 ~ 500Hz, 5G 12min./1 | cycle, period for 72min. e | ach along X, Y, Z axes | | | |
| | SAFETY STANDARDS Note.6 | UI 8750, CSA C22 2 No. 250 13-12, EN/AS/NZS 61347-1, EN/AS/NZS 61347-2-13, EN62384 independent GB19510 1, GB19510 14 | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC | | | | | |
| SAFETY & | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | | | |
| EMC | EMC EMISSION Note.6 | | | | 0-3-3,GB17743 and GB17 | 625.1, EAC TP TC 020 | |
| | EMC IMMUNITY | Compliance to EN61000-4 | 1-2,3,4,5,6,8,11, EN61547, | light industry level (surge i | mmunity Line-Earth 4KV, Lin | e-Line 2KV), EAC TP TC 02 | |
| OTHERS | MTBF | | ordia SR-332 (Bellcore) ; | | | , | |
| | DIMENSION | 220*68*38.8mm (L*W*H) |) | | · · · · · · · · · · · · · · · · · · · | | |
| | PACKING | 1.04Kg; 12pcs/13.5Kg/0. | 8CUFT | | | | |
| NOTE | All parameters NOT special | | | d current and 25°C of am | bient temperature. | | |
| HOIL | 2. Please refer to "DRIVING METHODS OF LED MODULE". | | | | | | |
| | De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. | | | | | | |
| | 4. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance wi | | | | | | |
| | | equipment manufacturers must re-qualify EMC Directive on the complete installation again. | | | | | |
| | 6. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently | | | | | | |
| | connected to the mains. 7. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 80°C or less. | | | | | | |
| | No. 1 This series meets the typical life expectancy of >62,000 hours of operation when rease, particularly (to) point (or TMP, per DLC), is about 80 °C or less. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com | | | | | | |
| | 9. The ambient temperature derating of 3.5° C/1000m with fanless models and of 5° C/1000m with fan models for operating altitude higher than 2000m(6500ft). | | | | | | |
| | 1 | D. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf | | | | | |
| | Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx | | | | | | |
| | X Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx | | | | | | |




■ BLOCK DIAGRAM

PFC fosc: 70KHz PWM fosc: 60KHz

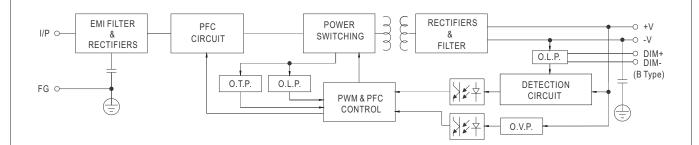

■ DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.

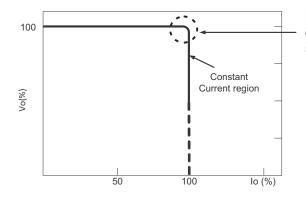


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.









imes 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 A 10/100 A 10/10/100 A 10/100 A 10/100
 - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC

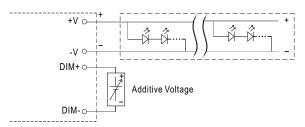


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

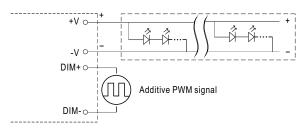



"DO NOT connect "DIM- to -V"


Applying additive resistance:

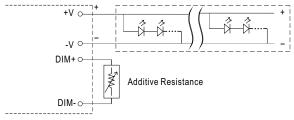

"DO NOT connect "DIM- to -V"









HLG-120H-C series

Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

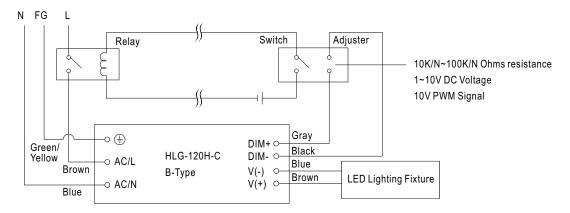


Using a switch and relay can turn ON/OFF the lighting fixture.



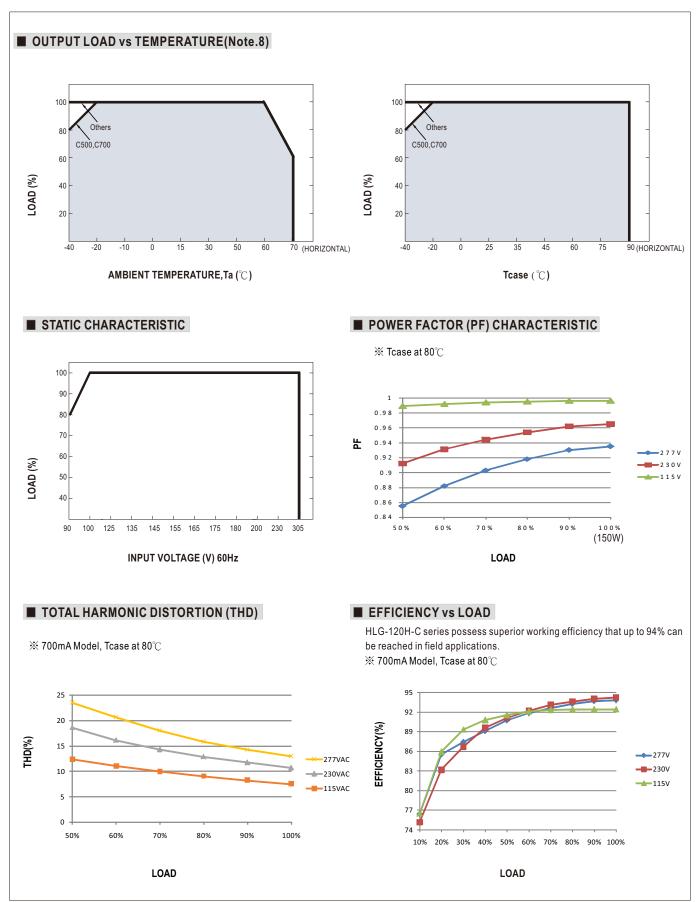




■ LIFE TIME

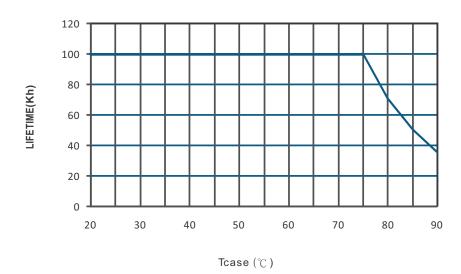


HLG-120H-C series

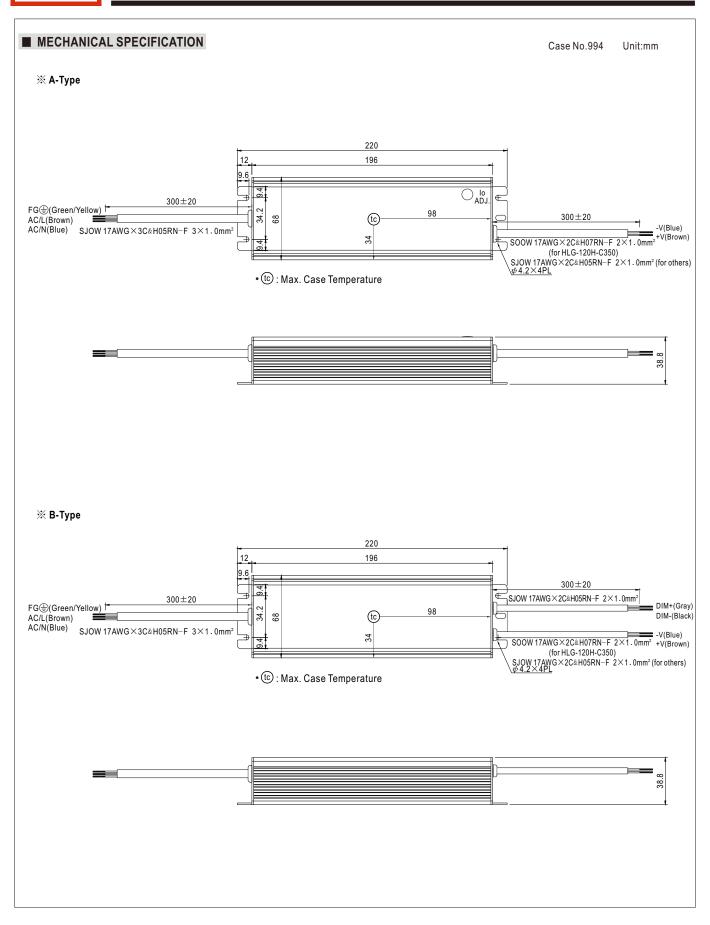





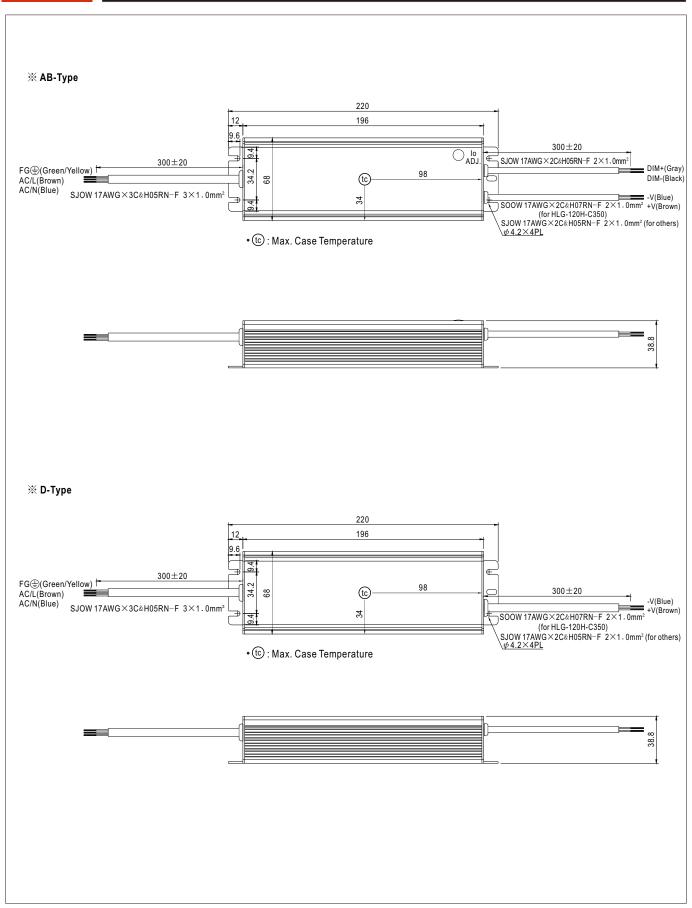




■ WATERPROOF CONNECTION


O Waterproof connector

 $Waterproof connector \ can \ be \ assembled \ on \ the \ output \ cable \ of \ HLG-120H-C \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$




| Size | Pin Configuration (Female) | | | |
|------------------|----------------------------|----------|--|--|
| M12 | 000 | <u></u> | | |
| IVITZ | 4-PIN | 5-PIN | | |
| | 5A/PIN | 5A/PIN | | |
| Order No. | M12-04 | M12-05 | | |
| Suitable Current | 10A max. | 10A max. | | |

| Size | Pin Configuration (Female) | | |
|------------------|----------------------------|--|--|
| M15 | 00 | | |
| IVITO | 2-PIN | | |
| | 12A/PIN | | |
| Order No. | M15-02 | | |
| Suitable Current | 12A max. | | |
| | | | |



O Cable Joiner

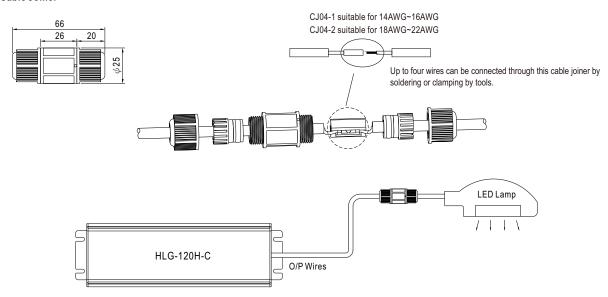

«CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No.: CJ04-1, CJ04-2.

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html