







■ Features

- · Constant Current mode output
- Plastic housing with Class II design
- Built-in active PFC function
- · Class 2 power unit
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED panel lighting
- · LED downlight
- · LED decorative lighting
- · LED tunnel lighting
- · Moving sign

Description

LPF-60D series is a 60W AC/DC LED driver featuring the constant current output. LPF-60D operates from $90 \sim 305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for $-40\,^{\circ}\text{C} \sim +80\,^{\circ}\text{C}$ case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. LPF-60D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

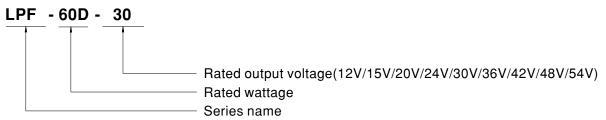

60W Constant Current Mode LED Driver

LPF-60D series

SPECIFICATION


MODEL		LPF-60D-12	LPF-60D-15	LPF-60D-20	LPF-60D-24	LPF-60D-30	LPF-60D-36	LPF-60D-42	LPF-60D-48	LPF-60D-5	
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V	
ОИТРИТ	RATED CURRENT	5A	4A	3A	2.5A	2A	1.67A	1.43A	1.25A	1.12A	
	RATED POWER Note.5	60W	60W	60W	60W	60W	60.12W	60.06W	60W	60.48W	
	CONSTANT CURRENT REGION Note.2	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	CURRENT RIPPLE	5.0% max. @rated current									
	CURRENT TOLERANCE	±5.0%									
	SETUP, RISE TIME Note.6	1000ms, 80ms / 115VAC 500ms, 80ms / 230VAC									
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC									
INPUT	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)									
	FREQUENCY RANGE	47 ~ 63Hz									
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)									
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)									
	EFFICIENCY (Typ.)	86%	87%	88%	89%	90%	90%	90%	90%	90%	
	AC CURRENT	0.8A / 115VAC									
	INRUSH CURRENT(Typ.)	COLD START 55A(twidth=270µs measured at 50% Ipeak) at 230VAC; Per NEMA 410									
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	8 units (circuit breaker of type B) / 14 units (circuit breaker of type C) at 230VAC									
	LEAKAGE CURRENT	<0.75mA/240VAC									
PROTECTION	OVER CURRENT	95~108%									
		Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.									
	OVER VOLTAGE	15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 35V	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V	
	0121110211102		/p voltage, re- _l								
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover									
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)									
	MAX. CASE TEMP.	Tcase=+80°C									
	WORKING HUMIDITY	20 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)									
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes									
SAFETY & EMC	SAFETY STANDARDS Note.8	UL8750, CSA C22.2 No. 250.0-08, ENEC EN61347-1, EN61347-2-13 independent, EN62384, EAC TP TC 004, IP67, GB19510.1, GB19510.14 approved; design refer to UL60950-1									
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC									
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH									
	EMC EMISSION Note.8										
		Compliance to EN55015, EN61000-3-2 Class C (@load ≥ 60%); EN61000-3-3, GB17743 and GB17625.1, EAC TP TC 020									
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level (surge immunity Line-Line 2KV),EAC TP TC 020 1202.9K hrs min. Telcordia SR-332 (Bellcore); 396.7Khrs min. MIL-HDBK-217F (25°C)									
OTHERS	MTBF	177									
	DIMENSION	162.5*43*32mm (L*W*H)									
	PACKING	0.45Kg; 32pcs/15.4Kg/0.93CUFT									
NOTE	1 .	arameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.									
	2. Please refer to "DRIVING METHODS OF LED MODULE". 3. Pipple 8 pains are many under 20MHz of headquidth by using a 12" twisted pair wire terminated with a 0.1 of 8, 47 of parallel capacities.										
	3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.4. Tolerance : includes set up tolerance, line regulation and load regulation.										
	4. Tolerance: includes set up tolerance, line regulation and load regulation. 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.										
		set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.									
	,	driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the									
	1	the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.									
	1	ne latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch									
	without permanently connected to the mains.										
		ypical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 70°C or less.									
	1	nty statement on MEAN WELL's website at http://www.meanwell.com									
	11. The ambient temperature of	derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ff									
	12. For any application note an	and IP water proof function installation caution, please refer our user manual before using.									
	https://www.meanwell.com/	/Upload/PDF/L	.ED_EN.pdf								
	Law Book and the Broad and										

× Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




■ BLOCK DIAGRAM

fosc: 100KHz

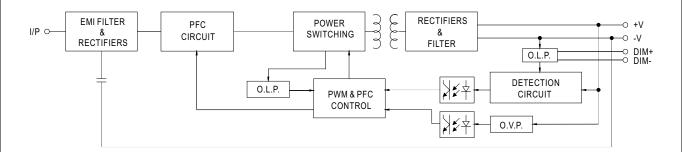

■ DRIVING METHODS OF LED MODULE

 $\ensuremath{\mathbb{X}}$ This series works in constant current mode to directly drive the LEDs.

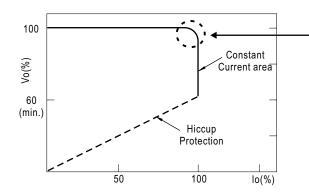

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

% 3 in 1 dimming function




- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Direct connecting to LEDS is suggested. It is not suitable to be used with additional
 Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


O Applying additive resistance:



"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

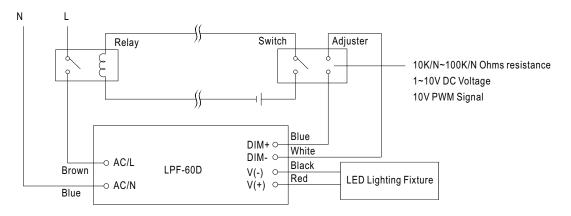


Using a switch and relay can turn ON/OFF the lighting fixture.



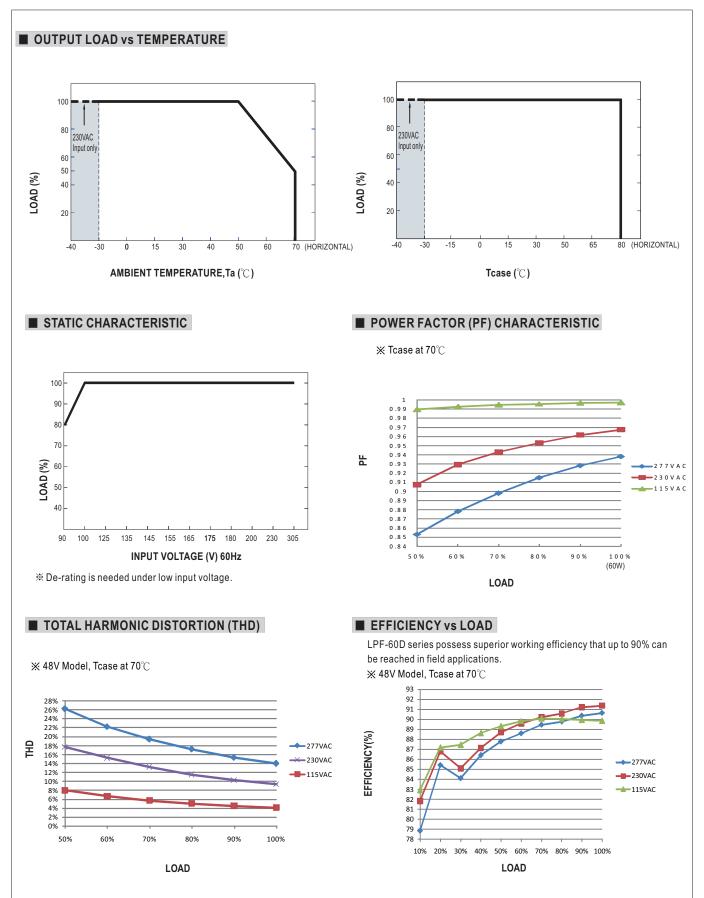





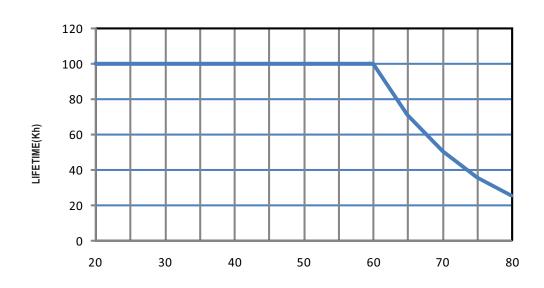


Tcase ($^{\circ}\!\mathbb{C}$)



■ MECHANICAL SPECIFICATION

CASE NO.: LPF-60B Unit:mm

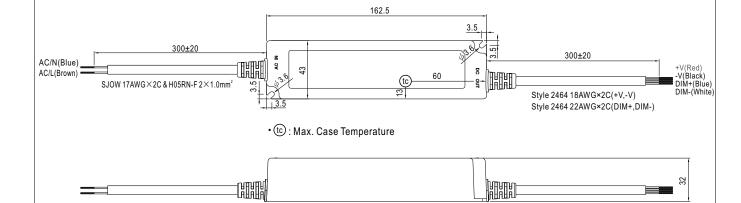

■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html