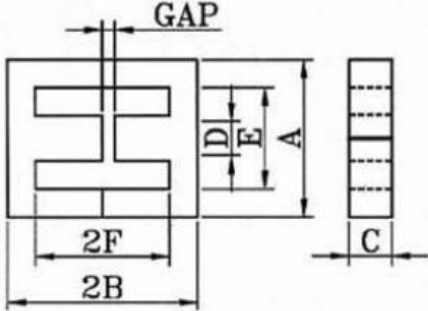


越峰電子材料股份有限公司 ACME Electronics Corporation			客戶規格編號(Customer Spec.No.)																																			
客戶特殊規格書 (Customer Specification)	品名: (Part No.) P41EF12.6G112	客戶名稱 (Customer) Platan	生效日期(Effective Date)																																			
客戶料號(Customer Part No.):			版次(Version) 第一版																																			
 尺寸規格 Dimensions (mm) : <table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>GAP</td></tr><tr><td>12.60+0.50/-0.40</td><td>6.40±0.10</td><td>3.60±0.20</td><td>3.65±0.15</td><td>8.80min</td><td>4.65±0.15</td><td>0.13ref</td></tr></table> <table><tr><td>Ae</td><td>Le</td><td>Ve</td></tr><tr><td>12.40mm²</td><td>29.60mm</td><td>367.00mm³</td></tr></table> 電磁特性規格 (Electrical Characteristics): 低鐵損材質 (Low loss Material) <table><tr><td>材質 (Material)</td><td>初導磁率 μ i</td><td>電感(Inductance) AL(nH/N2)</td></tr><tr><td>P41</td><td>2400±25%</td><td>4.03±10%</td></tr></table> 測試條件(Testing Condition): <table><tr><td>測試條件 Condition</td><td>10kHz,50mV</td></tr><tr><td>測試儀器 Equipment</td><td>卡尺(callipers)/HP4284A</td></tr><tr><td>室溫 Temperature</td><td>25°C±3°C;</td></tr><tr><td>線圈 Coil</td><td>6Ts (customer coil)</td></tr></table> REMARK: 1.Text by one ungapped core and one gapped core.					A	B	C	D	E	F	GAP	12.60+0.50/-0.40	6.40±0.10	3.60±0.20	3.65±0.15	8.80min	4.65±0.15	0.13ref	Ae	Le	Ve	12.40mm ²	29.60mm	367.00mm ³	材質 (Material)	初導磁率 μ i	電感(Inductance) AL(nH/N2)	P41	2400±25%	4.03±10%	測試條件 Condition	10kHz,50mV	測試儀器 Equipment	卡尺(callipers)/HP4284A	室溫 Temperature	25°C±3°C;	線圈 Coil	6Ts (customer coil)
A	B	C	D	E	F	GAP																																
12.60+0.50/-0.40	6.40±0.10	3.60±0.20	3.65±0.15	8.80min	4.65±0.15	0.13ref																																
Ae	Le	Ve																																				
12.40mm ²	29.60mm	367.00mm ³																																				
材質 (Material)	初導磁率 μ i	電感(Inductance) AL(nH/N2)																																				
P41	2400±25%	4.03±10%																																				
測試條件 Condition	10kHz,50mV																																					
測試儀器 Equipment	卡尺(callipers)/HP4284A																																					
室溫 Temperature	25°C±3°C;																																					
線圈 Coil	6Ts (customer coil)																																					
核准(Approved by):	審查(Checked by):	制定(Prepared by): Renjie Xiao	頁次(Page)1/1 KS																																			