

申請單號：



ACME Electronics Corporation
越峰電子材料股份有限公司

規格書名稱/Specifications :P41EF20/19.9G103


客戶料號/Customer P/N：

一、形狀、尺寸、材質/Shape, dimensions & material：

(1)形狀、尺寸：如下圖所示(單位：mm)Shape & dimensions：

(2)材質Material：P41

圖例/Drawing：

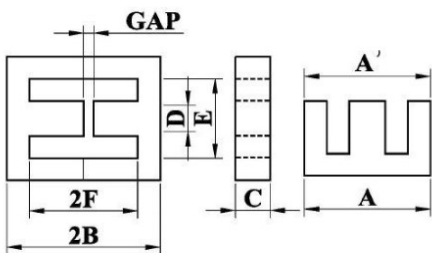

尺寸規格/Dimensions：

A：	20.4+0/-0.80	Ae:	32.10mm ²
B：	10.1+0/-0.30	Le:	46.30mm
C：	5.9+0/-0.40	Ve:	1490.00mm ³
D：	5.9+0/-0.30	Wt:	7.30g/set
E：	14.1+0.60/-0		
F：	7+0.30/-0		
GAP：	0.5ref		

二、電磁特性規格 Electrical Characteristics：

材質 Material	初導磁率 μ_i Initial Permeability
P41	2400±25%

測試條件 Test Condition

測試項目 Item	單位 Units	測試條件 Test Condition	測試溫度 Temperature	規格 Spec	測試儀器 Equipment	測試線包 Test coil
AL	nH/N ²	10kHz,50mV	25℃±3℃	103±5%	Calipers/HP4284A	Customer's coil

量測手法（選擇項目為”■ “）Test method(”■ “ means Yes)：

- ☒ 包麥拉帶2圈Wrap 2 layers of tape
☐ 客戶測試夾子Test with clip
☐ 至少對磨三次以上測試Abrad matching surface each other 3 times before testing the inductance
☒ 平面配GAP測試Test by nogap core and gapped core
☐ 雙GAP測試Test by pair of gapped cores
☒ GAP產品放置於引線端測試Place the gapped core at the test side and close to the bobbin before testing
☐ GAP產品放置於非引線端測試Place the nogap core at the test side and close to the bobbin before testing

注意事項: Remarks



AR01-60106-02