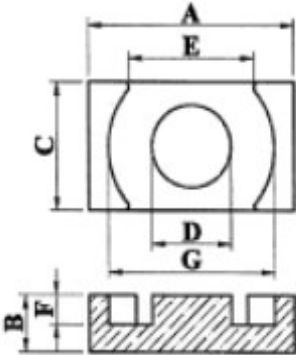


越峰電子材料股份有限公司 ACME Electronics Corporation			規格狀態(Spec situation) 暫規																												
客戶特殊規格書 (Customer Specification)	品名: (Part No.)	客戶名稱 (Customer)	生效日期(Effective Date)																												
	P41ER23	Platan	2022/8/22																												
		客戶料號(Customer P/N)	客戶圖紙號(Customer revision No.)																												
圖紙面型(Drawing)																															
																															
E-CORE尺寸規格:Dimensions(mm)																															
<table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td></tr><tr><td>23.20±0.45</td><td>3.60±0.10</td><td>12.50±0.25</td><td>8.00±0.20</td><td>17.5Min</td><td>1.60±0.10</td><td>20.20±0.40</td></tr><tr><td>Ac</td><td>Le</td><td colspan="4"></td></tr><tr><td>51.79mm²</td><td>25.08mm</td><td colspan="4"></td></tr></table>						A	B	C	D	E	F	G	23.20±0.45	3.60±0.10	12.50±0.25	8.00±0.20	17.5Min	1.60±0.10	20.20±0.40	Ac	Le					51.79mm²	25.08mm				
A	B	C	D	E	F	G																									
23.20±0.45	3.60±0.10	12.50±0.25	8.00±0.20	17.5Min	1.60±0.10	20.20±0.40																									
Ac	Le																														
51.79mm²	25.08mm																														
電磁特性規格 (Electrical Characteristics):																															
<table><tr><td>材質</td><td>初導磁率</td><td>電感係數</td></tr><tr><td>(Material)</td><td>μi</td><td>AL(nH/N²)</td></tr><tr><td>P41</td><td>2400±25%</td><td>3400±25%</td></tr></table>						材質	初導磁率	電感係數	(Material)	μi	AL(nH/N²)	P41	2400±25%	3400±25%																	
材質	初導磁率	電感係數																													
(Material)	μi	AL(nH/N²)																													
P41	2400±25%	3400±25%																													
測試條件(Testing Method):																															
<table><tr><td>測試條件 (Condition)</td><td>10KHz/50mV</td></tr><tr><td>測試儀器 (Equipment)</td><td>卡尺/高度規 caliber rule/height master</td></tr><tr><td>測試溫度 (Temperature)</td><td>室溫(25℃±3℃)</td></tr><tr><td>線圈 (Winding)</td><td>自繞綫包 (φ0.25mm/10Ts) Handmade coil (φ0.25mm/10Ts)</td></tr></table>						測試條件 (Condition)	10KHz/50mV	測試儀器 (Equipment)	卡尺/高度規 caliber rule/height master	測試溫度 (Temperature)	室溫(25℃±3℃)	線圈 (Winding)	自繞綫包 (φ0.25mm/10Ts) Handmade coil (φ0.25mm/10Ts)																		
測試條件 (Condition)	10KHz/50mV																														
測試儀器 (Equipment)	卡尺/高度規 caliber rule/height master																														
測試溫度 (Temperature)	室溫(25℃±3℃)																														
線圈 (Winding)	自繞綫包 (φ0.25mm/10Ts) Handmade coil (φ0.25mm/10Ts)																														
其它規定 (Others):																															
1、自繞綫包(Handmade coil).																															
核准(Approve): 林秉翰		審查(Check):		制定(Prepared By): 石超希																											
				頁次(Page):1/1																											
				工廠 GZ																											

AR01-00028-01